TELE-TECH

Oct. 13-16
ASA
Oct. 19-21
Sept. 28-30
May 14-16
RTMA
RADIO-TELEVISION MANUFACTURERS ASSOCIATION
EST. 1924
June 15-18
Sept. 21-25
RCA
Dec. '53
IRE
Mar. 23-26
NEDA
AIEE
June 15-19
NATIONAL ASSOCIATION OF RADIO AND TELEVISION BROADCASTERS
NARTB
Apr. 28- May 1
SMPTE
Apr. 27-May 1
ACM
NEMA
NAED

RMC By-Pass DISCAPS

are Rated at 1000 Working Volts

Modern Engineering Requires This

"HEAVY DUTY" CERAMIC CAPACITOR

The heavier ceramic dielectric element made by an *entirely new process* provides the necessary safety factor required for line to ground applications or any application where a steady high voltage condition may occur. Designed to withstand constant 1000 V.A.C. service.

It is wise to specify RMC "HEAVY DUTY" by-pass DISCAPS throughout the entire chassis because they *cost no more* than ordinary lighter constructed units.

Specify them too, for your own peace of mind, with the knowledge that they can "take it." And if you want proof—request samples.

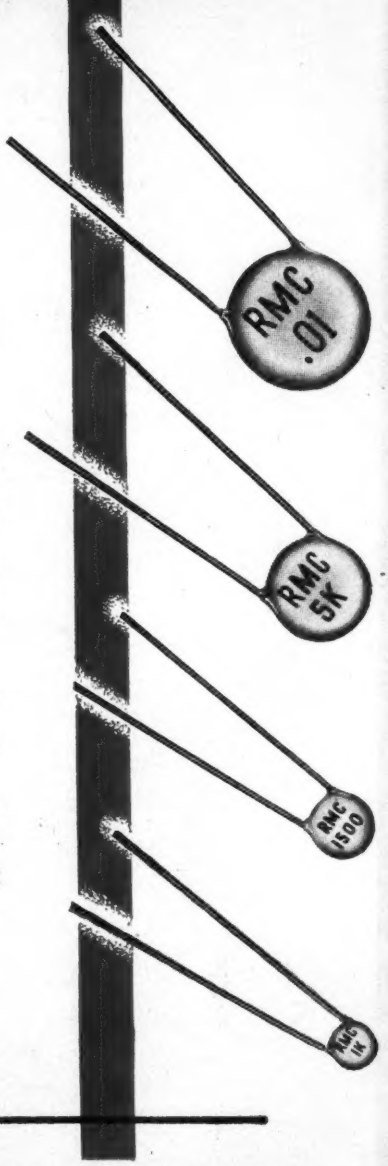

"RMC DISCAPS"
The Right Way to Say
Ceramic Condensers

A New Development from the RMC Technical Ceramic Laboratories

DISCAP CERAMIC CONDENSERS

RMC

RADIO MATERIALS CORPORATION

GENERAL OFFICE: 3325 N. California Ave., Chicago 18, Ill.

FACTORIES AT CHICAGO, ILL. AND ATTICA, IND.

DISTRIBUTORS: *Contact* Jobber Sales Co., 146 Broadway, Paterson 1, N. J.

TELE-TECH

A Caldwell-Clements Publication

MARCH, 1953

FRONT COVER: STELLAR ELECTRONIC EVENTS AHEAD—Pictured here are the emblems of the principal engineering, professional, and commercial organizations serving the Electronic Industries. Where possible the dates for forthcoming main annual events for each of these groups has been indicated under the symbol. For a complete listings of organizations (from top to bottom) and coming events see page 155.

Electronic Industries Totals 3

The Need for Advance Engineering Planning ..... Haraden Pratt 64

Casting Resins for Electronic Equipment ..... William R. Cuming 68

A Five-Channel Analog Correlator ..... M. J. Levin & J. F. Reintjes 70

Strain Gage Remote Metering ..... G. F. Stastny & R. S. Butts 73

Preview of the 1953 IRE Convention 76

Reliability of Filamentary Subminiature Tubes ..... Ross Wood 78

Avoidance of Crosstalk in Large Audio Distribution Systems
R. H. Tanner & G. B. Thompson 80

Frequency Range for Air Dielectric Coaxial Transmission Lines
O. Fiet, W. E. Day, J. Griesman, J. H. Vogelman 82

CONELRAD 85

Cues for Broadcasters 86

A Quality Factor for Radar Cathode-Ray Tube Presentations .... A. F. Bischoff 88

Frequency Feedback ..... Hans E. Hollman 91

Precision Transistor Oscillator 93

Positive and Negative High Voltage Supply ... George Robinson & Roland Van Allen 94

Transistor Characteristics at Low & Medium Frequencies ..... L. J. Giacoletto 97

New TV Station Timetable 105

DEPARTMENTS

Tele-Tips 28
Letters 62
Editorial 64
Radarscope 65
New Equipment 100
Washington News Letter 106
News 108
Books 140
News of Manufacturers' Reps 146
Personal 148
Coming Events 154
Bulletins 178

TELE-TECH®, Vol. 12, No. 3. Published monthly by Caldwell-Clements, Inc. M. Clements, President; Orestes H. Caldwell, Treasurer. Acceptance under Section 34.64 Postal Laws and Regulations authorized at Bristol, Conn., February 8, 1952 with additional entry at New York, N. Y. 75 cents a copy. Annual Subscription Rates: United States and Possessions: $7.00; Canada: $8.00; All Other Countries $10.00. Please give title, position and company connection when subscribing. Copyright by Caldwell-Clements, Inc., 1953. Printed in U.S.A.

CALDWELL-CLEMENTS, Inc.

Publication Office, Bristol, Conn. Editorial/Business Offices, 480 Lexington Ave., New York 17, N. Y., Tel. Plaza 9-7880

Publishers also of TELEVISION RETAILING

®Reg. U. S. Pat. Off.

TELE-TECH'S GUARANTEED CIRCULATION, 21,000

Because of the lag in auditing, never catching up with current circulation in an expanding industry, an audit for the calendar year 1953 will not be made until the summer of 1954. Meanwhile, sworn statements and post office receipts will be furnished covering the guaranteed 21,000 circulation.

EXPANDING PRODUCTION
in Toroids & Filters

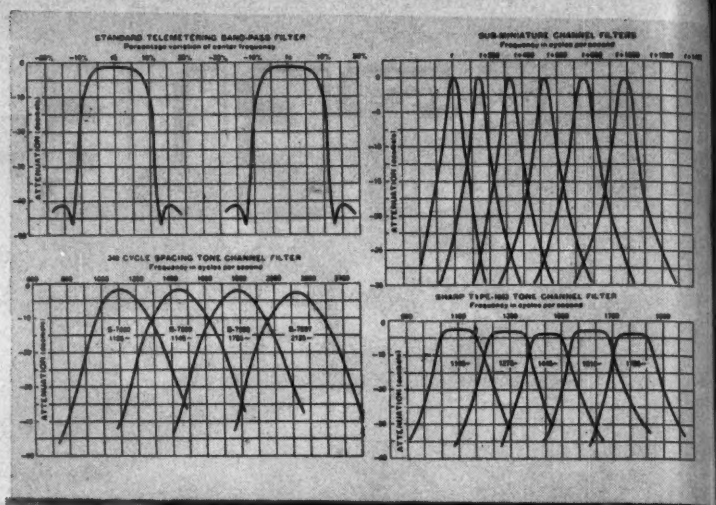
STANDARD TELEMETERING BAND-PASS FILTER
SUB-MINIATURE CHANNEL FILTERS
240 CYCLE SPACING TONE CHANNEL FILTER
SHARP TAPE-MD TONE CHANNEL FILTER

At every management meeting in Burnell & Company there is an unseen but highly respected visitor. He is the spectre of all our customers and his opinions carry weight. Recently he suggested that in addition to our other expansion measures that we must find a way to improve deliveries for emergency and special sample orders. Our solution is certainly not original but no less effective.

Burnell & Company's new sample department has been able to produce audio filters from proverbial 'scratch' to the customer's waiting hands in as little as ten days!

Frankly, this cannot always be accomplished but our average has been ranging between three to four weeks for emergency samples and four to six weeks for regular prototypes instead of the former twelve weeks of the pre-sample department days.

Adding this to our new winding department and our new testing and finishing departments the sum total has been a *still* better product at a better delivery than ever before.

EXCLUSIVE MANUFACTURERS OF COMMUNICATIONS NETWORK COMPONENTS

Burnell & Company
YONKERS 2, NEW YORK

Radio and TV Receiver Production

	TV		Radio
January 1953	710,000	Home	360,000
		Battery	89,000
		Auto	370,000
		Clock	186,000
Total	710,000		1,005,000
January, '52	404,932		632,455

Stations and Transmitters Authorized

Stations in the Safety and Special Radio Services now reported by the FCC exceed 212,000 for 1952, an increase of 35,000 during preceding 12 months. These stations comprise 537,000 transmitters as shown by the classification table on the right, below. In addition, the FCC has authorized 2,420 AM BC stations, 648 FM BC stations, and more than 300 TV stations.

Class of station	June 30, 1951	June 30, 1952	Increase or (decrease)
Aeronautical Services:			
Carrier aircraft	2,173	1,921	(252)
Private aircraft	28,113	27,678	(435)
Public service aircraft	546	364	(182)
Aeronautical land and fixed	1,310	1,183	(127)
Civil air patrol	1,483	798	(685)
Airdrome control	56	59	3
Aeronautical navigational	155	166	11
Flight test	86	100	14
Flying school	18	20	2
Aeronautical utility mobile	88	105	17
Aeronautical advisory	33	209	176
Total	34,061	32,603	(1,458)
Marine Services:			
Ship	26,681	32,229	5,548
Ship radar	1,625	1,958	333
Coast	116	107	(9)
Alaskan coastal	344	379	35
Alaskan fixed public	517	568	51
Maritime radiolocation	----	22	22
Maritime fixed	----	64	64
Other	261	173	(88)
Total	29,544	35,500	5,956
Public Safety Services:			
Police	6,198	7,008	810
Fire	432	764	332
Forestry-Conservation	1,728	2,070	342
Highway maintenance	408	555	147
Special emergency	313	670	357
State guard	50	76	26
Total	9,129	11,143	2,014
Land Transportation Services:			
Railroad	604	757	153
Urban transit	111	110	(1)
Intercity bus	31	34	3
Taxicab	3,152	3,639	487
Highway truck	270	341	71
Automobile emergency	85	146	61
Citizens	560	1,401	841
Total	4,813	6,428	1,615
Industrial Services:			
Power	5,016	6,065	1,049
Petroleum	2,416	3,787	1,371
Forest products	453	685	232
Special industrial	1,451	2,760	1,309
Low power industrial	150	259	109
Relay press	35	51	16
Motion picture	21	23	2
Agriculture	9	9	0
Radiolocation land	0	41	41
Total	9,551	13,680	4,129
Amateur and Disaster Services:			
Amateur	90,585	113,092	22,507
Disaster communications	2	71	69
Total	90,587	113,163	22,576
Grand total	177,685	212,517	34,832

Class of station	Land or fixed station transmitters	Mobile station transmitters	Total transmitters
Aeronautical Services:			
Aircraft [1]	----	39,307	39,307
Ground [1]	2,716	----	2,716
Total	2,716	39,307	42,023
Marine Services:			
Ship	----	32,229	32,229
Ship radar	----	1,958	1,958
Coast	141	----	141
Alaskan coastal	376	----	376
Alaskan fixed public	450	----	450
Other	135	----	135
Total	1,102	34,187	35,289
Public Safety Services:			
Police	4,878	76,231	81,109
Fire	511	10,461	10,972
Forestry-Conservation	1,489	12,588	14,077
Highway maintenance	414	3,845	4,259
Special emergency	387	1,347	1,934
State guard	53	87	140
Total	7,732	104,559	112,291
Land Transportation Services:			
Railroad	534	8,640	9,174
Urban transit	70	1,669	1,739
Intercity bus	28	387	415
Taxicab	3,317	122,037	125,354
Highway truck	237	2,984	3,221
Automobile emergency	116	1,439	1,555
Citizens [2]	----	3,000	3,000
Total	4,302	140,156	144,458
Industrial Services:			
Power	4,186	46,946	51,132
Petroleum	2,787	12,406	15,193
Forest Products	414	4,781	5,195
Special industrial	1,245	14,370	15,615
Low-power industrial	----	2,305	2,305
Relay press	21	428	449
Motion picture	11	173	184
Agriculture	10	----	10
Radiolocation	2	9	11
Total	8,676	81,418	90,094
Amateur and Disaster Services:			
Amateur [3]	113,092	----	113,092
Disaster Communications [4]	67	335	402
Total	113,159	335	113,494
Grand total	137,687	399,962	537,649

[1] This count includes an estimated 750 land and 9,000 mobile Civil Air Patrol stations.
[2] Estimated.
[3] As of June 30, 1952.

NOTE.—A station is defined as a separate license or construction-permit authorization. For example, 65 mobile units operating on 1 license are counted as 1 station.

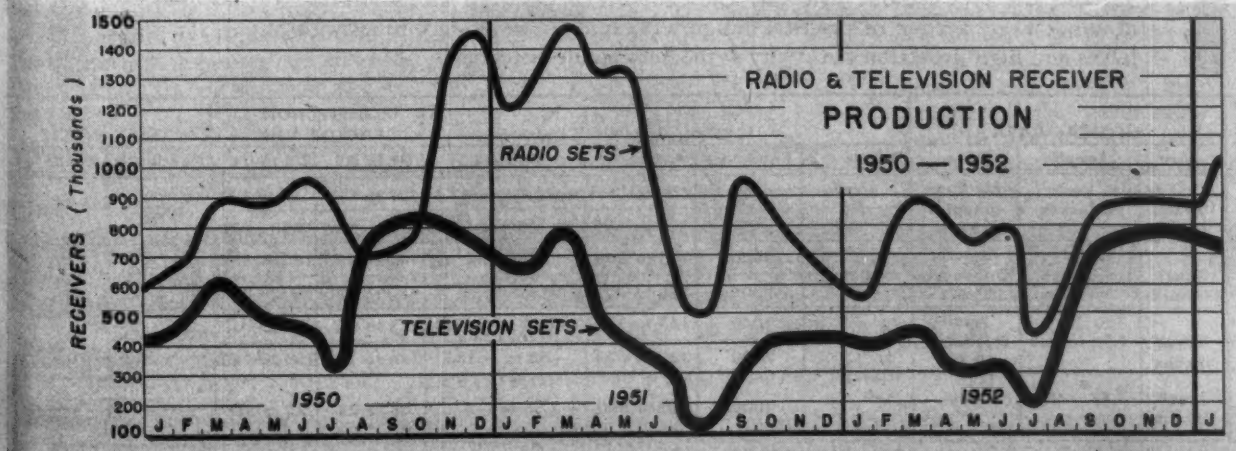

See also Caldwell-Clements Statistics in World Almanac, Encyclopaedia Britannica, National Conference Board Economic Almanac, and "Information Please" Almanac

PULSESCOPE®

The Oscilloscope that portrays the Pulse by **Waterman**

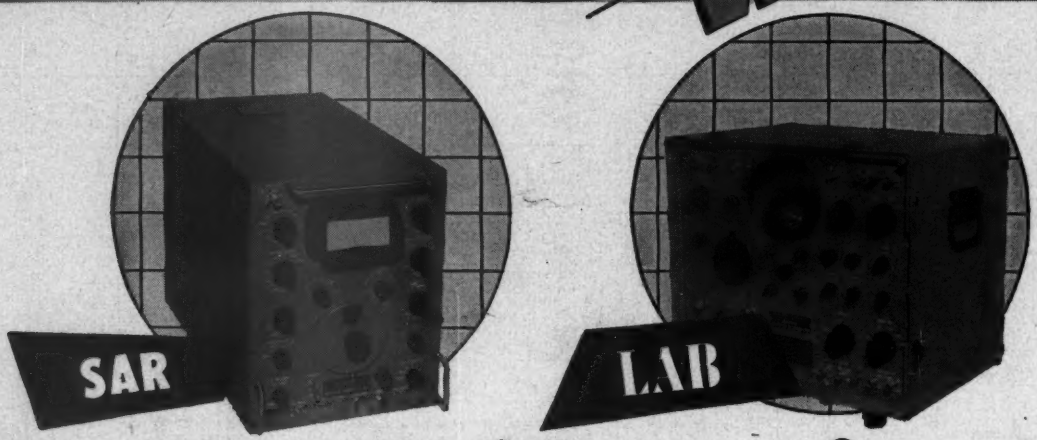

Classic Examples of Precision Engineering...

Investigations of complex waves take great strides forward when either a Waterman SAR or LAB PULSESCOPE is employed. Their compactness, portability and precision have established a new high in pulse measurement instruments for all electronic work. Each PULSESCOPE has internally generated markers which are synchronized with the sweep with the basic difference that the sweep in the LAB PULSESCOPE initiates the markers while in the SAR PULSESCOPE it is the crystal controlled markers which initiate the sweep. Power supply requirements of 50 to 1000 c.p.s. at 115 Volts permits operation almost anywhere.

The SAR PULSESCOPE, model S-4-A, is characterized by a pulse rise time of 0.035 microseconds thru a video amplifier with a sensitivity of 0.5 Volts p to p/inch. A vertical delay of 0.55 microseconds is optional. A and S sweeps covering a continuous range from 1.2 to 12,000 microseconds are augmented by R sweeps, which in turn are variable from 2.4 to 24 microseconds. A directly calibrated dial permits R sweep delay readings from 3 to 10,000 microseconds.

The LAB PULSESCOPE, model S-5-A, has equivalent rise time of 0.035 microseconds, a fixed 0.55 microseconds vertical delay and 0.1 Volts p to p/inch sensitivity, so arranged as to assure portrayal of leading edges on displayed signals. A precision calibrated voltage is provided as well as an optional sweep expansion of 10 to 1. A built-in trigger generator voltage is available for synchronizing any associated test equipment.

WATERMAN RAYONIC CATHODE RAY TUBE DEVELOPMENTS

Since the introduction of the Waterman RAYONIC 3MP1 for miniaturized oscilloscopes, scientists in our laboratories have diligently searched for more perfect answers to present day cathode ray tube problems. Such research led to the introduction of the revolutionary new 3SP and 3XP type cathode ray tubes. These tubes were designed with multi-trace oscilloscopy in mind. Every avenue of practical design was explored to produce tubes with bright, sharp traces and high deflection sensitivity at medium anode potentials.

TUBE	PHYSICAL DATA			TYPICAL VOLTAGES				DEFLECTION FACTOR V/IN.		MAX. VOLTS	
	Face	Length	Base	Anode #3	Anode #2	Anode #1	Grid #1	D1 to D2	D3 to D4	Anode #3	Anode #2
3JP	3 inch Round	10 inches	Medium Diheptal 12 Pin	3000	1500	300 to 515	−22.5 to −67.5	127 to 173	94 to 128	4000	2000
				4000	2000	400 to 690	−30 to −90	170 to 230	125 to 170		
3MP	3 inch Round	8 inches	Small Duodecal 12 Pin		1000	200 to 350	0 to −68	140 to 190	130 to 180		2500
					2000	400 to 700	0 to −126	280 to 380	260 to 360		
3SP	1½x3 inches	9.12 inches	Small Duodecal 12 Pin		1000	165 to 310	−28.5 to −67.5	73 to 99	52 to 70		2750
					2000	330 to 620	−58 to −135	146 to 198	104 to 140		
3XP	1½x3 inches	8.88 inches	Loctal		2000	400 to 690	−22.5 to −67.5	68 to 92	25 to 35		2750

Visit Our Booth 1-414, IRE SHOW, MARCH 23rd to 26th

POCKETSCOPE®

The Pocket Oscilloscope by Waterman

...light...compact...accurate...portable

The HIGH, WIDE and TWIN POCKETSCOPES have become the "triple threat" of the oscilloscope industry. Their small size, light weight and incredible performance, has skyrocketed this team of truly portable instruments into unparalleled prominence. Each oscilloscope features DC coupled amplifiers in both its vertical and horizontal channels. The HIGH GAIN, S-14-A POCKETSCOPE, has a vertical sensitivity of 10 millivolts rms/inch, and a frequency response within −2 db from DC to 200 KC, while the WIDE BAND S-14-B POCKETSCOPE is characterized by frequency response within −2 db from DC to 700 KC and a sensitivity of 50 millivolts rms/inch.

The TWIN POCKETSCOPE is essentially two HIGH GAIN POCKETSCOPES with individual cathode ray tubes, amplifiers, controls, but a common sweep generator. All these are endowed with many identical characteristics. Their sweep generators can be operated as triggered or repetitive over a frequency range from 0.5 cycles to 50 KC, with synchronization polarity optional. Return traces are blanked and provisions are made for modulating the intensity in each cathode ray tube.

Laboratory quality has not been sacrificed in order to accomplish portability and ruggedness. Investigate the many advantages of Waterman POCKETSCOPES.

POCKETSCOPE

The INDUSTRIAL POCKETSCOPE, model S-11-A, has become America's most popular DC coupled oscilloscope because of its small size, light weight, and unique flexibility. This compact instrument has identical vertical and horizontal amplifiers which permit the observation of low frequency repetitive phenomena, while simultaneously eliminating undesirable trace bounce. Each amplifier sensitivity is 0.1 Volt rms/inch. The frequency responses are likewise identical, within −2 db from DC to 200 KC.

Discover for yourself the amazing utility of this tiny work-horse of industrial electronics.

S-11-A

RAKSCOPE®

S-12-B

The S-12-B RAKSCOPE is a rack mounted, JANized version of the famous Waterman S-11-A POCKETSCOPE, with the addition of a triggered sweep and a special calibrating circuit for rapid frequency comparisons. The entire oscilloscope is built to occupy but seven inches when mounted in a standard relay rack.

Because provisions are made for applying input signals from the rear, as well as the front, the S-12-B is the ideal combination, systems monitor and trouble-shooting oscilloscope. Investigate the multiple applications of this instrument as an integral part of your own rack mounted apparatus.

WATERMAN PRODUCTS

WATERMAN PRODUCTS CO., INC.

Write for your complimentary subscription of "POCKETSCOOP"

PHILADELPHIA 25, PENNA., U. S. A.

CABLE ADDRESS, POKETSCOPE, PHILA.

Manufacturers of POCKETSCOPES® · RAKSCOPES® · PULSESCOPES® and RAYONIC TUBES®

At the Glenn L. Martin Co., Baltimore, Md., American Beauty Soldering Irons are used to fasten parts to an overhead switch control panel for the pilot's compartment of Martin 4-0-4 twin-engine commercial transports.

American Beauty

makes perfect Soldered Connections

FOR THE GLENN L. MARTIN CO.

HERE'S WHY AMERICAN BEAUTY is the Standard-of-Perfection on the world's production lines . . . where dependability, long life and efficiency are demanded . . .

TEMPERATURE REGULATING STAND

Thermostatically controlled to maintain heat of Iron at any desired temperature while at rest.

- Nickel-coated, corrosion-resistant tips, easily and quickly replaced
- Super-flexible cord, American Beauty made, resists wear due to flexing
- Heating element of chrome-nickel ribbon resistance wire
- Insulated with pure mica
- Built-in adapter for ground wire
- Five sizes . . . from 50 to 550 watts

Write for Free Literature

AMERICAN BEAUTY Electric Soldering Irons are Service Proven . . . since 1894

A-104

AMERICAN ELECTRICAL HEATER CO.
DETROIT 2, MICH.

TELE-TECH

DR. O. H. CALDWELL, *Editorial Director* — M. CLEMENTS, *Publisher*

BERNARD F. OSBAHR, *Executive Editor* — DR. A. F. MURRAY, *Consulting Editor*
HARRY D. WULFORST, *Assistant Editor* — ALBERT FORMAN, *Assistant Editor*
JOHN H. BATTISON, *Contributing Editor* — B. V. SPINETTA, *Directory Editor*
ROLAND C. DAVIS, *Washington News Editor*
CHARLES DEYER, *Art Director*
LT. COL. STANLEY GERSTIN, *Consulting Editor*
(Vice Pres. & Gen. Mgr., Caldwell-Clements Manuals Corp.)

BUSINESS DEPARTMENT

M. H. NEWTON, *Business Manager*
HOWARD A. REED, *General Sales Manager*
JOSEPH DRUCKER, *District Manager*
JAMES S. COLEMAN, *District Manager*
N. McALLISTER, *Asst. Business Manager*
A. O'ROURKE, *Production Manager*
A. SHILLIN, *Asst. Production Mgr.*
BARBARA MILLER, *Reader Service Dept.*
480 Lexington Ave., New York 17, N. Y.
Telephone Plaza 9-7880

S. M. GASKINS, *Western Manager*
JOHN D. LUPTON, *District Manager*
201 N. Wells St., Chicago 6, Ill.
Telephone RAndolph 6-9225

CHRIS DUNKLE & ASSOCIATES
California Representatives
2506 W. 8th Street, Los Angeles 5, Calif.
Telephone DUnkirk 7-6149

WARREN S. BROWN, *Circulation Manager*
M. GROENING, *Asst. Circulating Manager*
JOHN J. BORGHI, *Controller*

GUARANTEED CIRCULATION 21,000

Because of the natural lag in auditing, never catching up with current circulation in an expanding industry, an audit for the calendar year 1953 will not be made until the summer of 1954. In the meantime, Caldwell-Clements, Inc. will furnish sworn statements and post office receipts for the current 21,000 guaranteed circulation.

TELE-TECH* is edited for top-level engineers and executives throughout the electronic industries. It gives the busy engineering executive authoritative information and interpretation of the latest developments and new products, with emphasis on subjects of engineering import and timeliness. Special attention is given to:

MANUFACTURING

—Electronic equipment, communications, broadcasting, microwave relay, instrumentation, telemetering and computing.
—Military equipment including radar, sonar, guided missiles, fire controls.
—TV-FM-AM receivers, phonographs, recorders, reproducers, amplifiers.

OPERATION

—Fixed, mobile and airborne communications in commercial, municipal, aviation and government services.
—Broadcasting, video and audio recording, records, audio and sound systems, motion picture production.
—Military, civilian and scientific electronic computing and control systems.

* Reg. U. S. Pat. Off.

the Teletron heater stands SQUARELY on its own two feet

SHOWN 4½ TIMES ACTUAL SIZE

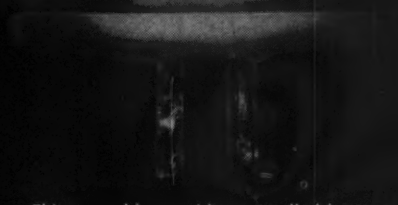

This assembly provides controlled heater-to-cathode positioning, eliminates heater shorts resulting from rupture of the heater coating, as shown below.

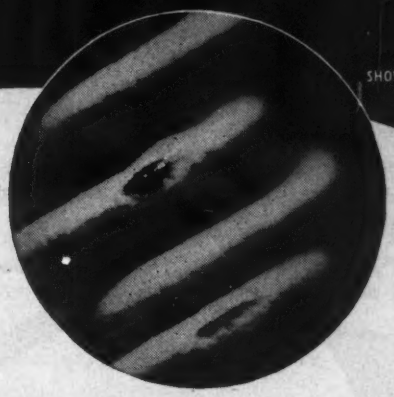

SHOWN 20 TIMES ACTUAL SIZE

Exclusive mounting makes the heater an integral part in the Teletron gun.

In the Du Mont Teletron, the heater "feet" are welded to stainless steel lugs which accurately position the heater on a ceramic disc. The result is a firmly welded, vertically aligned assembly which is inserted in the control grid cup and automatically positions the heater within the cathode. This eliminates critical, uncontrolled hand positioning of the heater. Positive centering prevents chafing of the delicate heater coating and avoids heater-to-cathode shorts.

Less open-heater failures

Stronger connections obtained by welding the tungsten heater "feet" to the stainless steel lugs rather than directly to the nickel stem leads, greatly reduce open heater failures.

Greater heater efficiency

When the control grid is assembled, the distance between the top of the heater helix and the outer ridge of the ceramic disc controls the depth to which the helix is seated inside the cathode. Optimum-depth seating is thus predetermined, insuring maximum heater efficiency.

Du Mont quality control of heater design and assembly builds longer, fuller, trouble-free life into every Teletron.

DU MONT *Teletrons**

*Trade Mark

In picture tubes...

fine details make Du Mont the finest

Cathode-ray Tube Division, ALLEN B. DU MONT LABORATORIES, INC., CLIFTON, N. J.

WESTERN UNION

W. P. MARSHALL, PRESIDENT

(43). •

SYMBOLS
DL=Day Letter
NL=Night Letter
LT=Int'l Letter Telegram
VLT=Int'l Victory Ltr.

CLASS OF SERVICE
This is a full-rate Telegram or Cable-gram unless its de-ferred character is in-dicated by a suitable symbol above or pre-ceding the address.

The filing time shown in the date line on telegrams and day letters is STANDARD TIME at point of origin. Time of receipt is STANDARD TIME at point of destination

NA130 PD=CHICAGO ILL 26 930A=
ANTARA CHEMICALS DIVN. GENERAL DYESTUFF CORP=
435 HUDSON ST NEW YORK NY=

INITIAL SHIPMENT ENTIRELY SATISFACTORY. WE WILL TAKE FULL ADVANTAGE OF GQ4'S HIGHER PERMEABILITY AND Q VALUE. SHIP ADDITIONAL 1000 POUNDS IMMEDIATELY. EXPECT CONTINUED LARGE ORDERS=

W E CAIRNES PRESIDENT RADIO CORES INC=

GQ4'S
Q VALUE

THE CORP[illegible]LL APPRECIATE SUGGESTIONS FROM ITS PATRONS CONCERNING ITS SERVICE

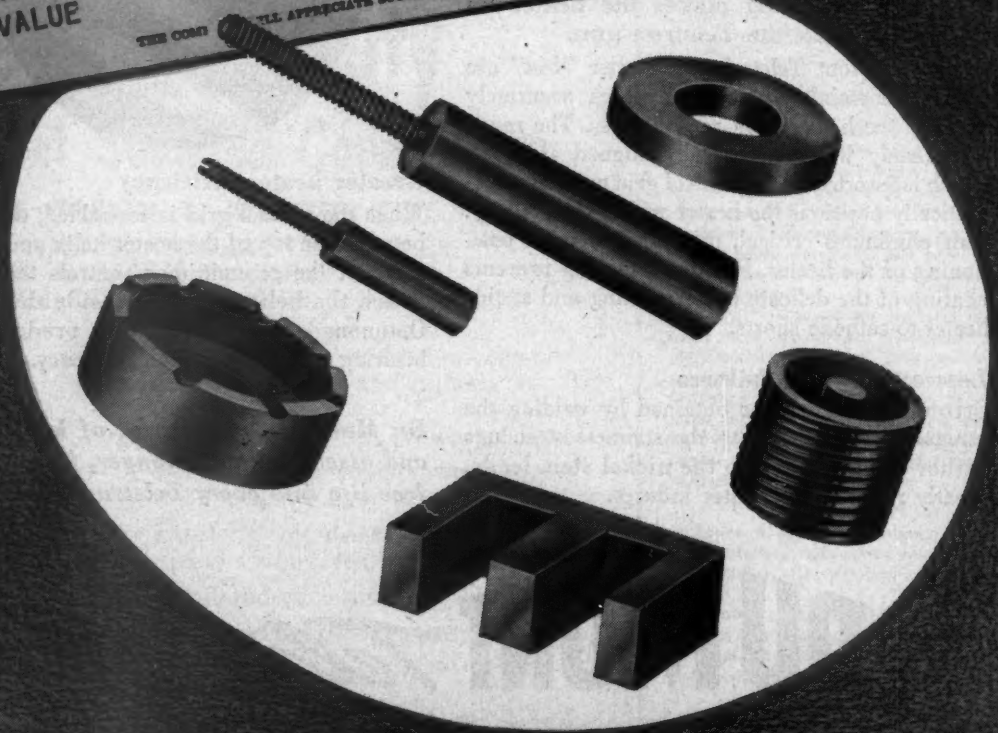

G A F CARBONYL IRON POWDERS

"We will take full advantage of GQ4's higher permeability and Q value"

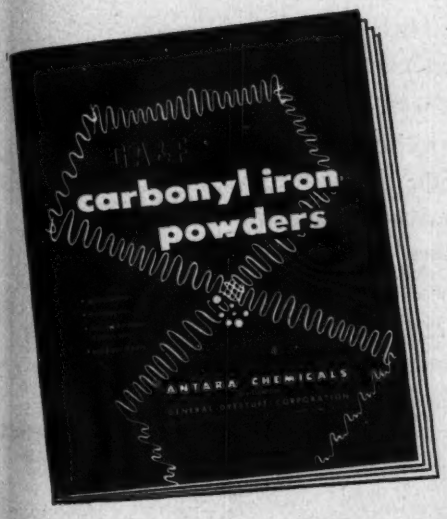

GQ4 is an almost pure iron powder consisting of spherical particles which are readily compressible, resulting in high permeability. In this respect, it exceeds all other Carbonyl Iron Powders by a considerable margin. The particles possess an efficient insulating coat. The powder was designed to replace HP, mixtures of HP and L, and, in some instances, L itself. Its properties are such that it should yield simultaneously, higher Q value, higher strength and often, higher permeability, than mixtures of HP and L.

We urge you to ask your core maker, your coil winder, your industrial designer, how G A & F Carbonyl Iron Powders can increase the efficiency and performance of the equipment or product you make, while reducing both the cost and the weight. We also invite inquiries from those whose requirements call for still greater variations than are offered by any of our existing types.

• • •

This wholly new 32-page book offers you the most comprehensive treatment yet given to the characteristics and applications of G A & F Carbonyl Iron Powders. 80% of the story is told with photomicrographs, diagrams, performance charts and tables. For your copy—without obligation—kindly address Department 44.

MEMBER mpa METAL POWDER ASSOCIATION

ANTARA® CHEMICALS

Division of GENERAL DYESTUFF CORPORATION

435 HUDSON STREET • NEW YORK 14, NEW YORK

gdc ANTARA

horizons unlimited

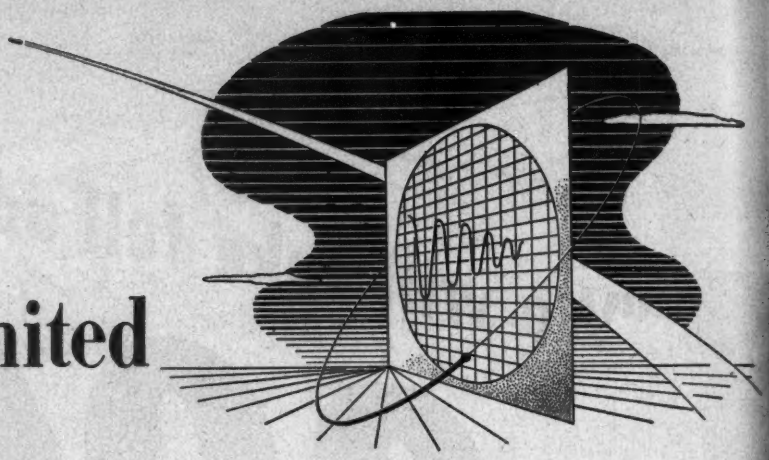

Inhibitions must be stifled if creative development is to have full freedom of expression. Only with a young, imaginative, "of course it can be done" attitude are the great advances of this modern era accomplished.

Ketay

has earned its place among the leaders in precision instrumentation on the record of its virile development and production staffs. Throughout its cumulative years of accomplishment, Ketay has confined its efforts to the development, engineering, and production of new types of electro-mechanical and electronic equipment.

Today, industrial and government orders almost fill the Ketay plants on both coasts. Currently in production is the miniturized highly precise Ketay Resolver—a type which opens new horizons in automatic control operations. Ketay developments are geared to performance above and beyond present military standards—which, in turn, were set by earlier Ketay product capabilities.

SYNCHROS SERVOS
RESOLVERS MAGNETIC AMPLIFIERS
AUTOMATIC CONTROL SYSTEMS
ELECTRONIC EQUIPMENT

Tomorrow, and for many tomorrows to come, Ketay is dedicated to a relentless search for new ways to solve the electronic problems of American Industry.

Ketay MANUFACTURING CORP.
New York, N.Y. Hawthorne, Cal.
Executive offices: 555 Broadway, New York 12, N.Y.

DESIGN
DEVELOPMENT
MANUFACTURE *of precision instruments*

WHAT IS HERMETIC DOING ABOUT Transistors?

HERMETIC is now actively engaged in the development of hermetic seals for both point contact and junction transistors. These are being designed for plug applications, feed-through connections, fuse-type mounts, etc. Typical of other HERMETIC innovations, they will be noted for accuracy, sub-sub-miniature designs and a variety of shapes and flanges to fit every form of housing. In addition, it will be possible to use these new hermetic seals for both single and double mount.

for information and assistance concerning your own transistor problems. Please submit sketches indicating mounts, limiting dimensions, number and size of contacts and any other applicable specifications.

HERMETIC's 32-page catalog is also available with a wealth of data on hermetic seals. Your copy is free!

HERMETIC SEAL PRODUCTS CO.

33 South Sixth St., Newark 7, New Jersey

FIRST AND FOREMOST IN MINIATURIZATION

"Check your air, Sir?"

He's checking the air pressure in a branch cable, one of scores serving a town. The readings along the cable are plotted as a graph to find low-pressure points which indicate a break in the protecting sheath.

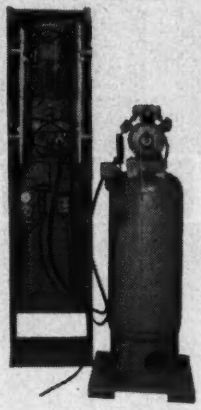

Air compressor and tank are at right. Long cylinders on rack dry air before it enters cables.

Master meters keep watch over the various cable networks which leave a telephone office in all directions to serve a community. Air enters the system at 7 pounds pressure, but may drop to 2 pounds in outermost sections—still enough to keep dampness out.

To keep voices traveling strongly through telephone cables, you have to keep water out. This calls for speed in locating and repairing cable sheath leaks—a hard job where cable networks fork and branch to serve every neighborhood and street.

At Bell Telephone Laboratories, a team of mechanical and electrical engineers devised a way to fill a complex cable system with dry air under continuous pressure. Pressure readings at selected points detect cracks or holes, however small. Repairman can reach the spot before service is impaired.

It's another example of how Bell Laboratories works out ways to keep your telephone service reliable—and to keep down the cost to you.

BELL TELEPHONE LABORATORIES

Improving telephone service for America provides careers for creative men in mechanical engineering

This continuous roll machine at the C-D-F, Bridgeport, Pa. plant makes top quality sheet fibre for electrical insulation. Corrosion-resistant rollers are made from laminated Dilecto, another famous C-D-F product.

CDF

DIAMOND VULCANIZED FIBRE

- mechanically and electrically strong
- moisture, arc and chemical resistant
- high dielectric strength
- easily machined and formed
- low-cost with long life

watched all the way... DIAMOND VULCANIZED FIBRE

Naturally it takes a big, well-equipped company like C-D-F to make fibre. It also requires a special brand of know-how and long experience to take rag paper (we make our own), zinc chloride and water and come up with a low-cost uniform product that can be adapted to a million uses.

Maybe you think that vulcanized fibre has been replaced by many newer, more publicized materials. Actually Diamond Vulcanized Fibre today has more applications, more unique qualities, more product design value than ever before.

If you need a dependable source for bone, commercial, Diamond "fish paper" insulation, tubes, rods, receptacles . . . talk to the man who knows . . . your C-D-F sales engineer (offices in all principal cities), or write C-D-F, Newark, Delaware.

THE NAME TO REMEMBER CDF DIAMOND VULCANIZED FIBRE

Continental-Diamond Fibre Company

NEWARK 101, DELAWARE

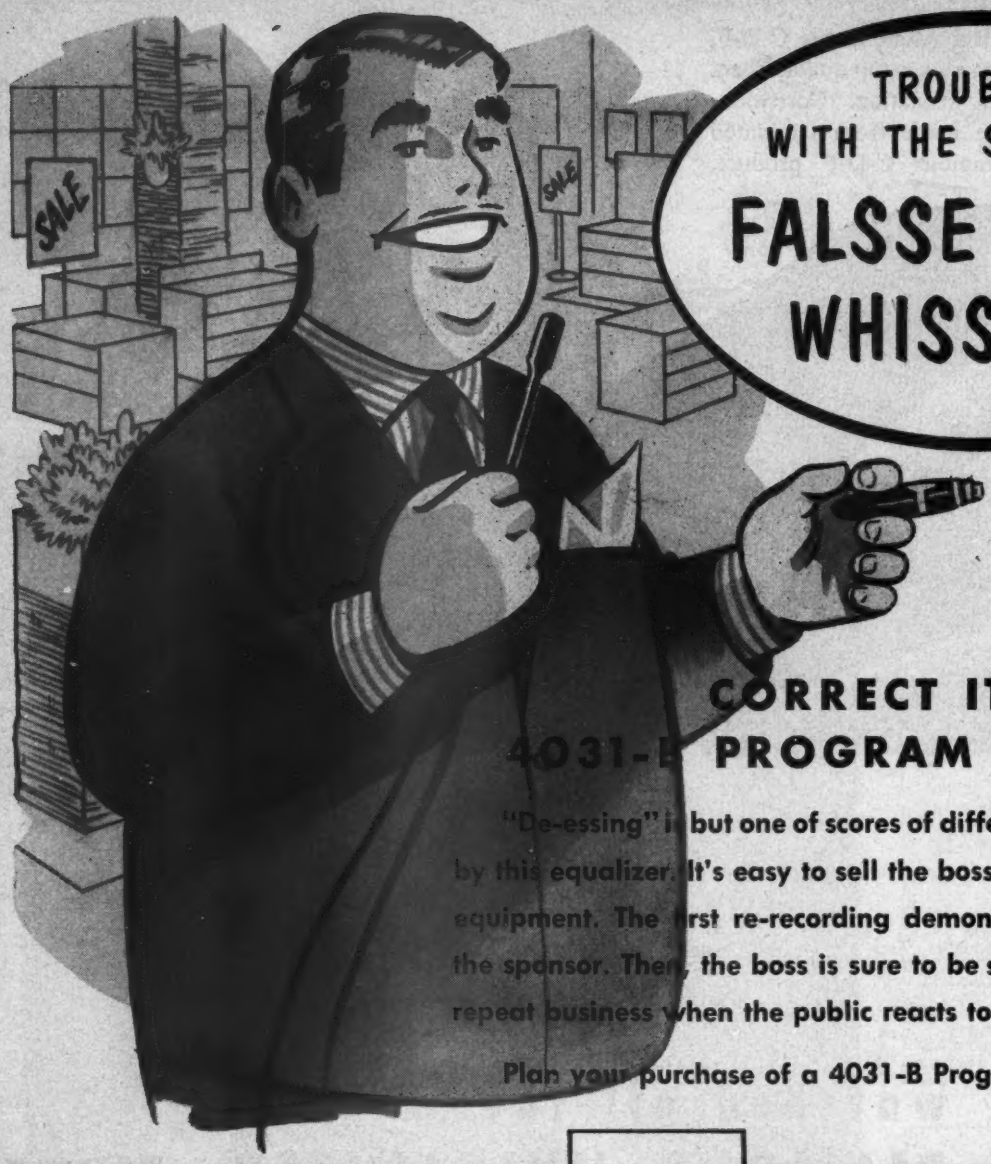

TROUBLED
WITH THE SPONSOR'S
FALSSE TEETH WHISSTLE?

CORRECT IT WITH A 4031-B PROGRAM EQUALIZER!

"De-essing" is but one of scores of different functions performed by this equalizer. It's easy to sell the boss on this addition to your equipment. The first re-recording demonstrates the difference to the sponsor. Then, the boss is sure to be sold. Enjoy that pleasant repeat business when the public reacts to your latest sound work.

Plan your purchase of a 4031-B Program Equalizer today!

THE CINEMA 4031-B
PROGRAM EQUALIZER

Used in all types of speech input equipment. The 4031-B corrective equalization saves on recording retakes; improves tonal quality; provides emphasis when needed during the program. Widely used in Motion Pictures, T-V, Recording and Miltary Communications.

YOUR AUDIO IS ENTITLED TO THE BEST

THE CINEMA 6517-D
VARIABLE LOW AND HIGH FREQUENCY FILTER

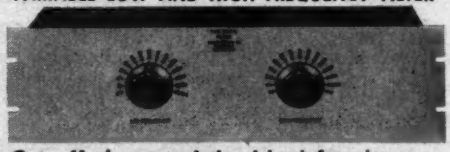

Cut off characteristics ideal for shortening frequency range; providing sound effects, such as telephone, whispering, spooks, etc. Clickless control allows insertion upon cue. Used in Motion Pictures, T-V, and Scientific Laboratories.

Write for descriptive literature.

IN NEW YORK: Audio & Video Products Corp. • 730 Fifth Ave. • Plaza 7-3091

CINEMA ENGINEERING COMPANY
1510 WEST VERDUGO AVENUE, BURBANK, CALIFORNIA

EXPORT AGENTS: Frazar & Hansen, Ltd. • 301 Clay Street • San Francisco, California, U.S.A.

You'll Find the Right Protection Every Time When You Look to BUSS FOR FUSES

A COMPLETE LINE FOR TELEVISION • RADIO • RADAR • INSTRUMENTS • CONTROLS • AVIONICS

For almost four decades, BUSS has specialized in the production of fuses that are unexcelled for dependability and quality. Today, this experience and forward-looking BUSS research combine to give you the most complete line of fuses for modern needs.

Your added assurance of BUSS dependability is the rigid testing every fuse must undergo. Sensitive electronic testing devices check BUSS fuses for proper construction, correct calibration and accurate physical demensions.

Turn To BUSS Engineers With Your Fuse Problems.

They will be glad to assist you in selecting the fuse to do the job best . . . and if possible a fuse that will be available from local wholesaler's stocks.

If your protection problem is still in the engineering state, tell us current, voltage, load characteristics etc.

BUSSMANN Mfg. CO., *Division McGraw Electric Company*
University at Jefferson, St. Louis 7, Missouri

and **A COMPLETE LINE OF FUSE CLIPS, BLOCKS AND HOLDERS**

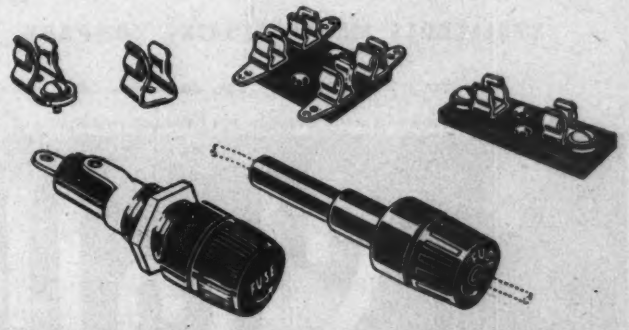

BUSSMANN Mfg. Co. (Division of McGraw Electric Co.)
University at Jefferson, St. Louis 7, Mo.

Please send me bulletin SFB containing facts on BUSS small dimension fuses and fuse holders.

*Name*_____

*Title*_____

*Company*_____

*Address*_____

*City & Zone*_____ *State*_____ TT-353

WHAT ABOUT
Stability
IN *PRECISION WIREWOUND* RESISTORS?

Stability—the most intangible and least understood resistor characteristic—is extremely important in critical electronic applications requiring mass-produced precision wirewound resistors. Unfortunately, a truly stable resistor of this type has never been made. If it could, such a resistor would never change in ohmic value despite environment, power dissipation, or time. The only way to obtain stability is to minimize the factors that work against it—unfavorable environment, power dissipation, and time.

ARTIFICIAL AGING IMPROVES STABILITY — The processes of winding, terminating, and impregnating a resistor produce strains in the winding. These must be relieved if the resistor is to remain stable at various temperatures. This is done by artificial aging—periodically subjecting the resistor to high ambient temperatures and power dissipation.

Hidden material and manufacturing faults can destroy stability. The effect of such faults can be accelerated by overload testing and temperature cycling at extremes of high and low temperatures. After this, unstable resistors may readily be detected by measurement and eliminated.

HUMIDITY AND IMPREGNATION—Absorption or adsorption of moisture by the winding, bobbin, impregnant, or label can appreciably lower resistance. Unless impregnation is adequate, the wire may corrode at the terminating points. In the presence of a polarizing voltage electrolysis may also take place. Shallcross uses high grade steatite bobbins, carefully inspected wire, special "BX" impregnation, and a three-layer acetate label for protection against humidity. For severe humidity—including salt water immersion—Shallcross manufactures resistors which are hermetically sealed in steatite.

POWER DISSIPATION AND BREAKDOWN—Electrical energy, when converted to heat, affects stability as mentioned in connection with the artificial aging process. The potential gradient concurrent with high power may also cause insulation breakdown between turns, thus lowering resistance permanently or temporarily.

The effects of power dissipation may be minimized by using wire and bobbins of the largest practicable sizes. If size is restricted, the resistor must be operated within the conservative ratings and deratings of JAN and Mil Specifications. Within these ratings, and in normal indoor environments, a stability of 1/10 tolerance can be expected without special treatment.

TIME—The insulating elements of the best resistor will deteriorate with time. However, an aged and selected resistor operating in a fixed environment with negligible power dissipation can have a stability of ±0.001%. Under severe conditions, but within commercial ratings, a standard Shallcross resistor will have a stability better than ½ tolerance.

Further details on Stability and other resistor characteristics are available in Shallcross Bulletin R-3C.

SHALLCROSS MANUFACTURING COMPANY • 518 PUSEY AVENUE, COLLINGDALE, PA.

See Us At the I.R.E. Show — Booths 2-210 and 2-211

The second of a series to promote a better understanding of the performance characteristics of precision wirewound resistors.

TO KEEP GUNS STABILIZED
over rough terrain

Visit Our Booth
2-315
I.R.E. SHOW
March 23-26
N.Y.C.

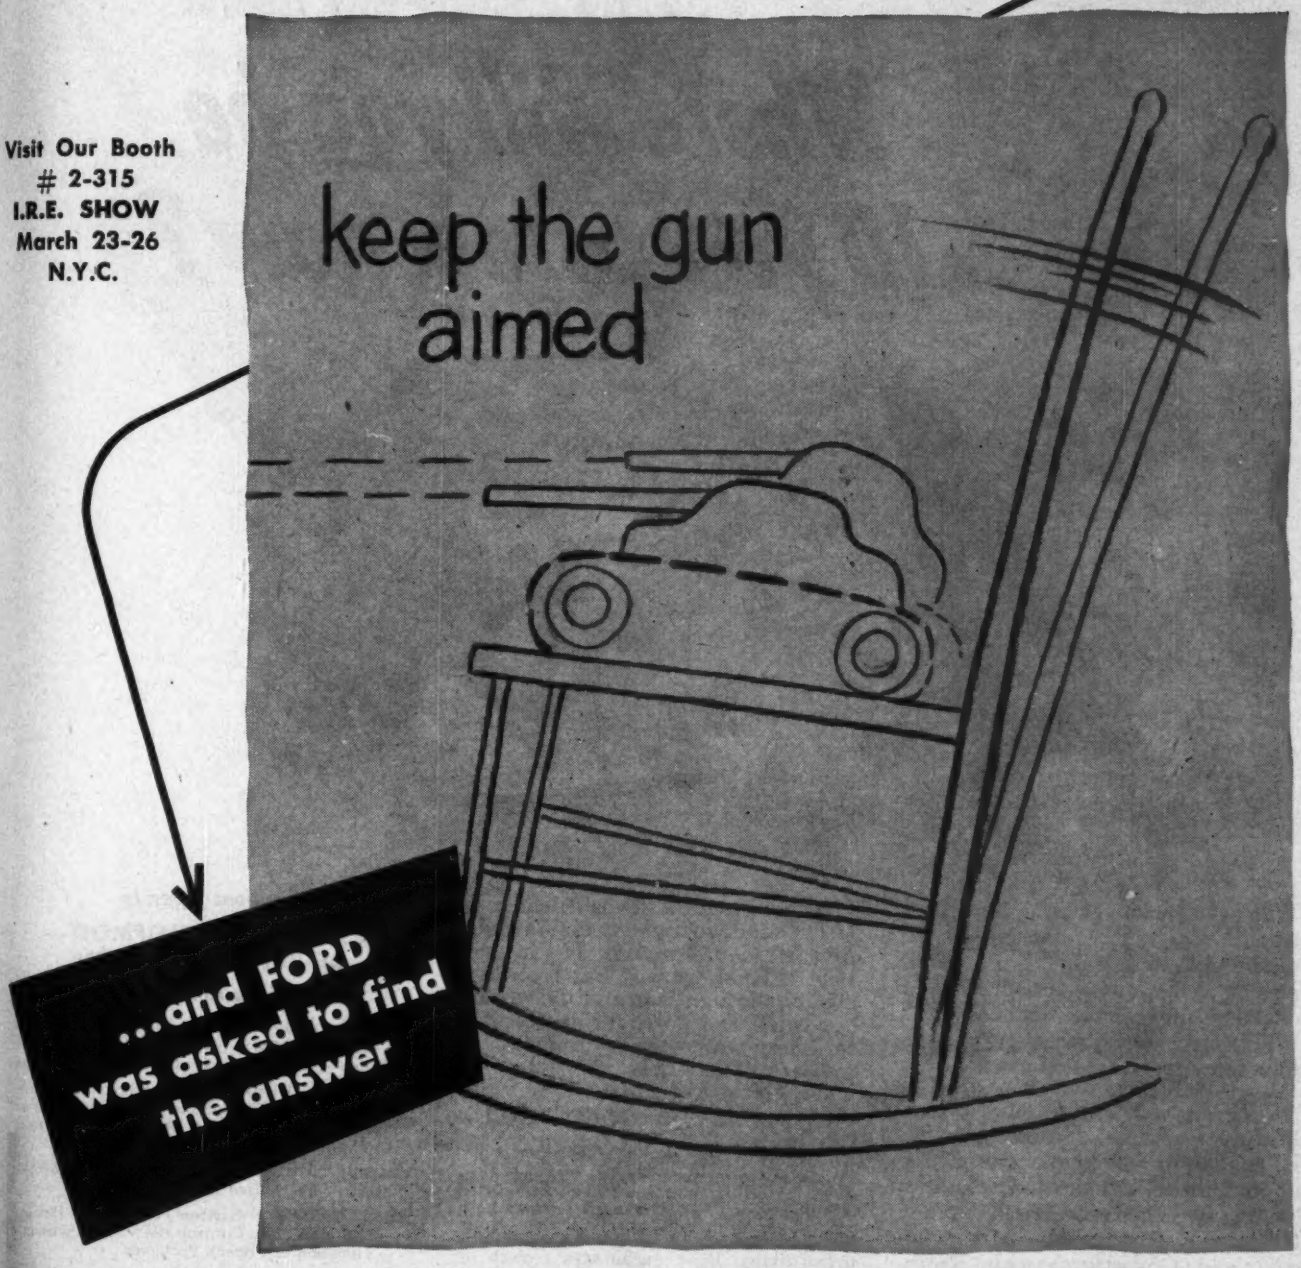

Over open area a tank pitches and heaves like a rocking chair . . . but regardless of the bumps . . . ditches . . . hills . . . the guns keep pointing at the target while the tank is moving. Ford Instrument Company played a vital role in designing and manufacturing a stabilizer unit for the tank's gun fire control system.

This is typical of the problems that Ford has solved since 1915. For from the vast engineering and production facilities of the Ford Instrument Company, come the mechanical, hydraulic electro-mechanical, magnetic and electronic instruments that bring us our "tomorrow" today. Control problems of both Industry and the Military are Ford specialties.

7

You can see why a job with Ford Instrument Company offers a challenge to young engineers. If you qualify, there may be a spot for you in automatic control development at Ford. Write for illustrated brochure.

FORD

FORD INSTRUMENT COMPANY
DIVISION OF THE SPERRY CORPORATION
31-10 Thomson Avenue, Long Island City 1, N. Y.

A QUESTION FOR ALL ENGINEERS:

Q: Where will you be 10 years from now?

A:

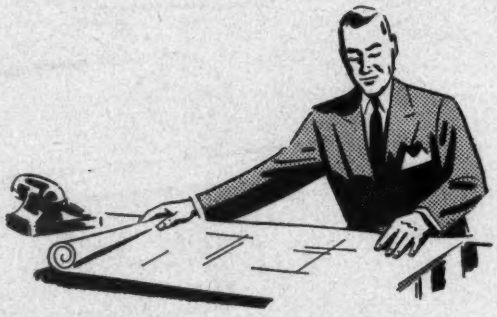

Will *your* achievements be recognized? Will *you* be associated with distinguished scientists and engineers? Will *your* work provide a challenge for *your* talent and ability? Will *your* position and income be founded upon *your* real merit?

At RCA, you'll find plenty of "future insurance"... and right now is the time to investigate RCA opportunities. Because RCA is now looking for experienced ELECTRONIC, COMPUTER, ELECTRICAL, MECHANICAL, and COMMUNICATIONS ENGINEERS ... PHYSICISTS ... METALLURGISTS ... PHYSICAL CHEMISTS ... CERAMISTS ... GLASS TECHNOLOGISTS. Whichever your specialty, there's a chance of a lifetime for a career with RCA—world leader in electronic development, first in radio, first in recorded music, first in television. RCA growth has remained steady through war and depression ... you'll find positions open today in many commercial projects, as well as military lines.

WHY RCA IS A GOOD PLACE FOR YOU TO WORK

Facilities for creative engineering are top-notch. Working conditions and associates stimulate you. Periodic merit reviews help you advance in grade and income. Your family can enjoy pleasant country or suburban living. RCA encourages growth of your professional status and recognition. Company-paid benefits—including life, accident and hospitalization insurance—increase your feeling of security. You look forward to retirement through a progressive program. RCA has a modern tuition refund plan for advanced study at recognized universities.

Positions Open In

RESEARCH—DEVELOPMENT—DESIGN—APPLICATION

in any of the following fields:

RADAR—Circuitry—Antenna Design—Servo Systems—Information Display Systems—Gear Trains—Stable Elements—Intricate Mechanisms

COMPUTERS—Digital and Analog—Systems Planning—Storage Technique—Circuitry—Servo Mechanisms—Assembly Design—High Speed Intricate Mechanisms

COMMUNICATIONS—Microwave—Aviation—Mobile—Specialized Military Systems

MISSILE GUIDANCE—Systems Planning and Design—Radar and Fire Control—Servo Mechanisms—Vibration and Shock Problems

NAVIGATIONAL AIDS—Loran—Shoran—Altimeters—Airborne Radar

TELEVISION DEVELOPMENT—Receivers—Transmitters and Studio Equipment

COMPONENT PARTS—Transformer—Coil—Relay—Capacitor—Switch—Motor—Resistor

ELECTRONIC TUBE DEVELOPMENT—Receiving—Transmitting—Cathode-Ray—Phototubes and Magnetrons

ELECTRONIC EQUIPMENT FIELD ENGINEERS—Specialists for domestic and overseas assignment on military electronic communications and detection gear.

Personal interviews arranged in your city.

Please send a complete resume of your education and experience to:

MR. ROBERT E. McQUISTON, Manager, Specialized Employment Division
Dept. 203-C, Radio Corporation of America, 30 Rockefeller Plaza, New York 20, N.Y.

RADIO CORPORATION of AMERICA

When the Heat's on . . .

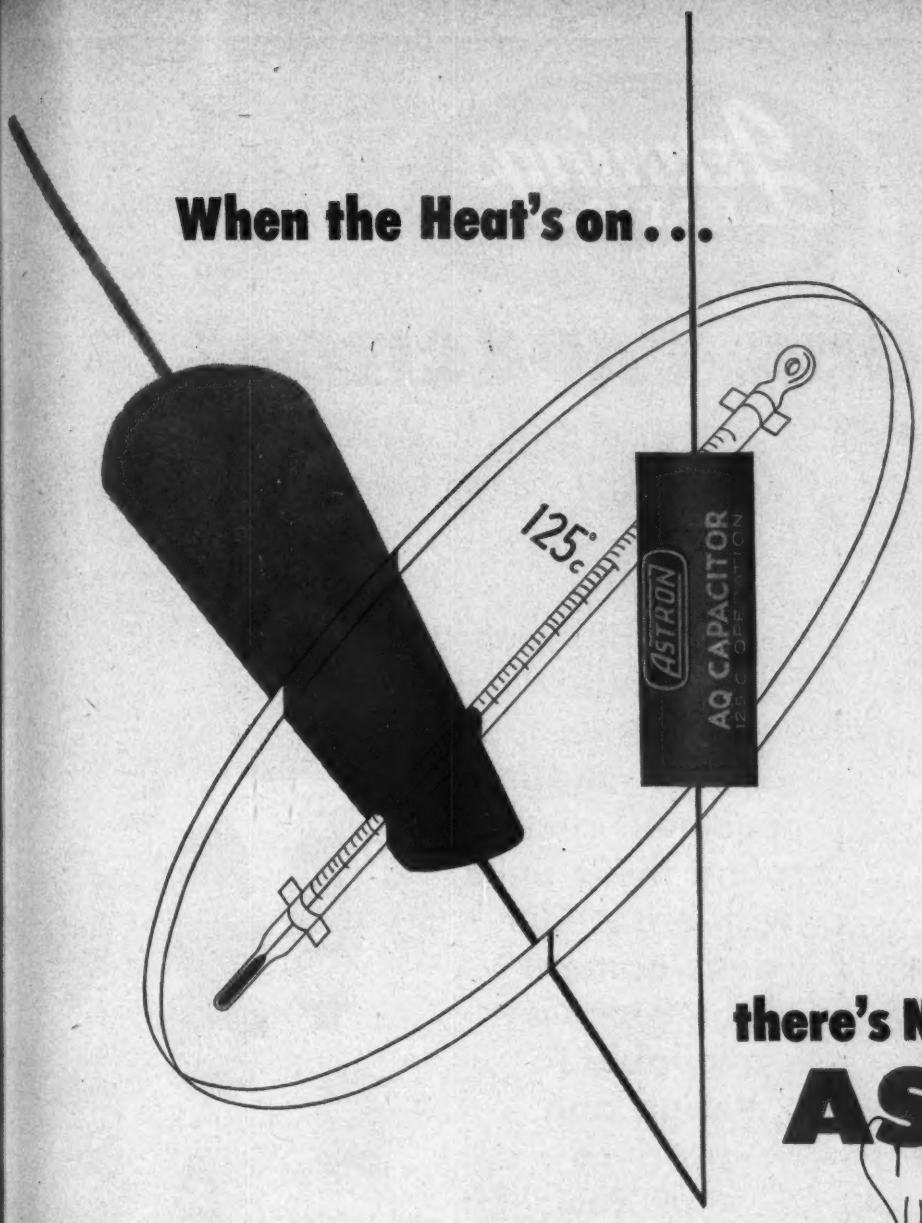

there's No Substitute for

ASTRON

TYPE AQ

Subminiature

PAPER CAPACITORS

Astron Type AQ Subminiature Paper Capacitors are designed for dependable operation at temperatures up to +125°C. *without derating*—thanks to Astron's newly developed high temperature impregnant, X-250*. They also provide exceptional capacitance stability over the wide range of −65°C. to +125°C.

High insulation resistance, low power factor, unusually low resonance loss, and high test voltage are achieved in an amazingly compact and rugged unit meeting all Armed Forces requirements. All AQ's are non-inductively wound in an extended foil construction. Glass-to-metal seal terminals assure positive hermetic sealing. And Astron AQ's are supplied in a variety of construction styles to meet your specific needs.

Write for engineering bulletin, containing test specifications and performance characteristics of Astron AQ Subminiatures, *today*.

Visit Astron at the I.R.E. Show, Booth 4-707, Grand Central Palace

Astron manufactures a complete line of dry electrolytic capacitors, metallized paper capacitors, plastic molded capacitors, subminiature paper capacitors and standard and subminiature RF interference filters for every radio, television and electronic use.

DEPEND ON—INSIST ON

ASTRON

255 Grant Avenue, E. Newark, N. J.

Export Division: Rocke International Corp., 13 E. 40th St., N.Y.C.
In Canada: Charles W. Pointon, 1926 Gerrard St. East, Toronto.

*Trade Mark

Jennings
RADIO
VACUUM ELECTRONIC COMPONENTS
VACUUM CAPACITORS
now available in such varieties of types, sizes, and electrical characteristics that you can design your next circuit around these units with ease. Our development laboratory is available to design and produce units for specialized application.
Voltages: Up to 65 KV
Currents: Up to 400 AMP
Capacities: Up to 2,500 MMFD
Ratio of change: Up to 180:1
SEE US AT THE MARCH I. R. E. ELECTRONICS SHOW, BOOTH 4-211
JENNINGS RADIO MANUFACTURING CO. · 970 McLAUGHLIN AVE.
P. O. BOX 1278 · SAN JOSE 8, CALIFORNIA

ANOTHER FIRST!

Torkrite Tubing in foreground, enlarged to show detail.

The Cleveland Container Company originates and is now producing for the electronic and electrical industries . . .

TORKRITE

CLEVELITE* EE INTERNALLY THREADED AND EMBOSSED TUBING.

TORQUE AND STRIPPING PROBLEMS ARE NOW ELIMINATED!

Electronic engineers find that TORKRITE, this newly designed and constructed Coil Form, has definite advantages over all other types requiring the use of threaded cores.

TORKRITE is one of the many items of CLEVELITE . . . a complete line of tubing for coil forms, collars, bushings, spacers, tubes and other items.

CLEVELITE has long been giving continuous satisfaction because of its dependable performance, uniformity and close tolerances.

Consult our Research and Engineering Laboratory.
It is at your service.

WHY PAY MORE? FOR THE BEST . . . CALL CLEVELAND!

*Reg. U. S. Pat. Off.

A few of many ADVANTAGES:

TORKRITE'S re-cycling ability is unmatched.

After a maximum diameter core has been re-cycled in a given form a reasonable number of times, a minimum diameter core can be inserted and measured at 1″ oz. approximately.

TORKRITE has no hole nor perforations through the tube wall. This eliminates possibility of cement leakage locking the cores.

TORKRITE allows use of lower torque as it is completely independent of stripping pressure.

With TORKRITE torque does not increase after winding, as the heavier wall will not tend to collapse and bind the core.

Available in lengths 3/4″ to 3 1/8″ to fit a 1/4-28 core.

★ ★ ★

See our Exhibit #2-309 at the Radio Engineering Show in New York City, March 23-26.

★ ★ ★

The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO

PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Ogdensburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario

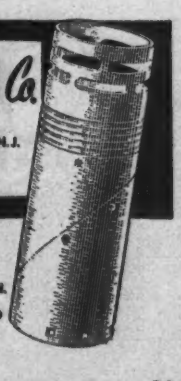

REPRESENTATIVES

NEW YORK AREA R. T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND R. S. PETTIGREW & CO., 62 LA SALLE RD., WEST HARTFORD, CONN.
CHICAGO AREA PLASTIC TUBING SALES, 5315 N. RAVENSWOOD AVE., CHICAGO

However you compute

IRC BT RESISTORS ARE FIRST

By whatever factor you consider most important, IRC filament type BT resistors lead the industry. The next time you specify insulated composition resistors remember—it pays to do business with the leader. Most people do.

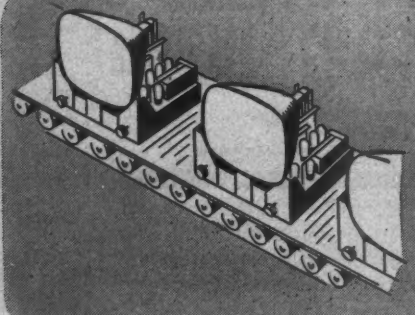

IF QUANTITY PRODUCTION INDICATES LEADERSHIP— ***remember*** more IRC BT resistors are used in radio and TV sets than any other brand. During the last five years IRC supplied 40% of the resistors used in radio and TV set production.

IF QUALITY STANDARDS DENOTE LEADERSHIP— ***remember*** IRC Advanced Type BT resistors meet and beat rigid JAN-R-11 specifications. Nearly all producers of government equipment have tested and approved IRC's advanced BT resistor.

leadership

IF GLOBAL ACCEPTANCE REFLECTS LEADERSHIP— *remember* IRC filament type BT resistors are favored in every major market of the world. Licensee plants in Canada, England, Denmark, Belgium, Italy and Australia produce IRC BT's for international electronics.

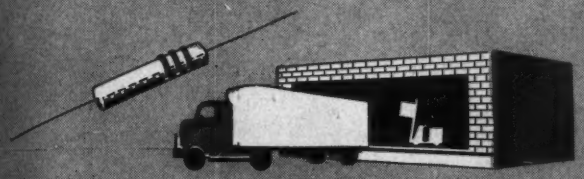

IF DEPENDABLE DELIVERY REPRESENTS LEADERSHIP— ***remember*** IRC's long record of strike-free labor relations protects your assembly lines. Dependable delivery of Advanced Type BT resistors is further assured by IRC's financial ability to maintain large stocks of wanted ranges and to draw from foreign licensees when demand warrants it.



IF RESEARCH AND ENGINEERING TESTIFY TO LEADERSHIP— *remember* IRC BT resistors are produced by the largest resistor manufacturer in the world. The finest accumulation of resistance know-how has been pooled in the perfection of these filament type resistors.

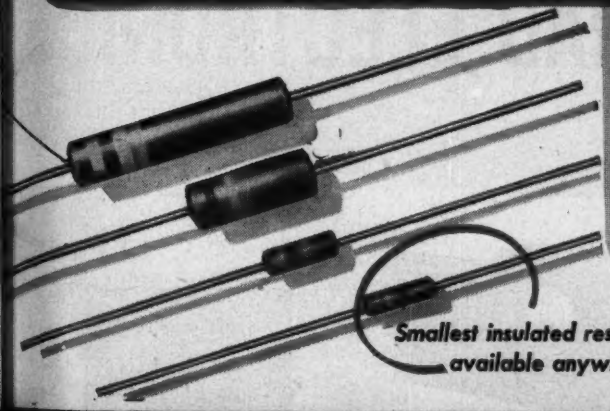

Smallest insulated resistor available anywhere

This coupon brings you full data on IRC BT Resistors

IRC

Wherever the Circuit Says —/\/\/\—

Boron-Carbon Precisistors • Power Resistors • Voltmeter Multipliers • Low Wattage Wire Wounds • Insulated Composition Resistors • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon Precisistors • Ultra HF and High Voltage Resistors • Insulated Chokes • Selenium Rectifiers

INTERNATIONAL RESISTANCE COMPANY
Philadelphia 8, Pennsylvania

In Canada: International Resistance Co., Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE COMPANY
407 N. Broad Street, Philadelphia 8, Pa.

Please send me full data on IRC Advanced Type BT Resistors:—

☐ Also name and address of nearest IRC Distributor who can furnish speedy delivery of BT resistors in small quantities.

NAME_____

TITLE_____

COMPANY_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

PRECISION LABORATORY INSTRUMENTS

NEW

MICROWAVE RECEIVERS

1000—10,750 mc

Four microwave receivers of high sensitivity, wide tuning range and selectivity. Image rejection is greater than 60 db. Gain stability better than ±2 db, permits application as a field intensity meter.



MICROWAVE SIGNAL SOURCES

Models SSR, SSL, SSS, SSM SSX, 634 MC to 10,750 MC

A reliable source of microwave energy in transmission loss meaurements, standing wave determination, etc. Unidial Control for accuracy and ease of operation. Direct reading (no mode charts to consult).

NEW

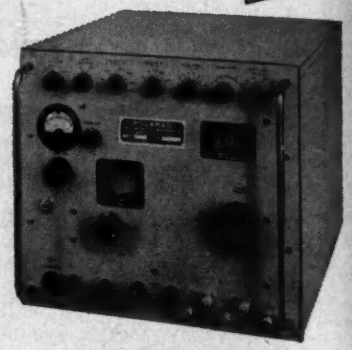

MICROWAVE SIGNAL GENERATOR

Model MSG-4
7,000 mc—10,750 mc

An ideal source of an accurately known signal voltage, precisely modulated. Sensitivity, frequency and performance of radio and radar equipments in the frequency range from 7 to 10.75 kmc can be readily measured on this continuously variable, direct reading signal generator.

Polarad *Electronics Corporation*

POLARAD ELECTRONICS

TELEVISION EQUIPMENT

RADIO CUE SYSTEM

Model AB

Used to direct the activities of persons within a limited area from a central control point. Widely used in broadcast and motion picture studios (sound and television). Ideal for factories, yards, hangars, airports, auditoriums, and places where the noise level is high. The Radio Cue System permits efficient operation under difficult conditions.



TELEVISION DISTRIBUTION AMPLIFIER

Model TDA-1

Isolates and distributes television signals over transmission lines for station and production use. TV Synchronizing and picture signals, both monochrome and color can be distributed to as many as five separate points.

See us at Booth 2-511, Radio Engineering Show

All Band, Direct Reading

IMPROVED

SPECTRUM ANALYZER

Model LSA

10 MC to 21,000 MC

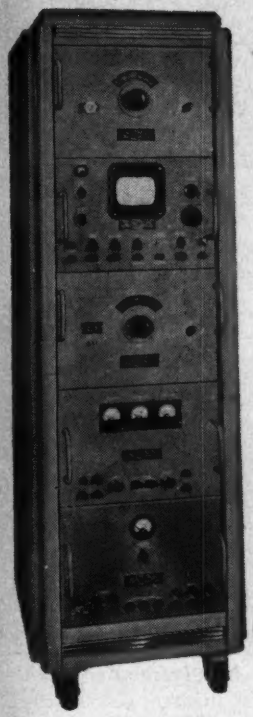

The Model LSA is the result of years of research and development. It provides a simple and direct means of rapid and accurate measurement and spectral display of an rf signal.

- Frequency accuracy 1 percent.
- No Klystron modes to set.
- Broadband attenuators supplied from 1 to 12 KMC.
- Frequency marker for measuring differences 0-25 MC.
- Only four tuning units required to cover entire range.

REGULATED POWER UNITS



MODEL PT111D

(Dual Regulated)

Consists of two independently regulated D.C. power sources (isolated from ground), mounted on one chassis. Each power source has its own power switch, fuse, pilot light and voltage control.



MODEL PT111

Consists of a positive and a negative voltage supply independently regulated.



MODEL PT112

Heavy duty electronically regulated D.C. power source.

WIDE BAND VIDEO AMPLIFIER

Model VT 10 CPS to 20 MC

Designed for use as an oscilloscope deflection amplifier for the measurement and viewing of pulses of short duration and rise time.

CORP. 100 METROPOLITAN AVENUE, BROOKLYN 11, N. Y.

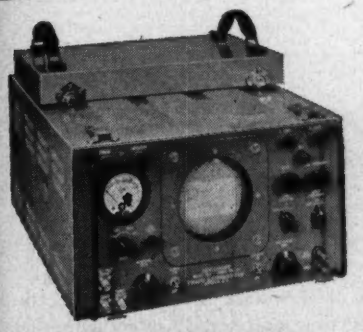

PORTABLE TELEVISION WAVE FORM MONITOR

Model TO-1

Designed for precise wave form analysis and amplitude measurement of video signal in television circuits. Also ideal as a general purpose instrument in many applications, because of its wide frequency response, high sensitivity, excellent synchronizing capability, precision calibrating circuits and unusually large symmetrical horizontal expansion.

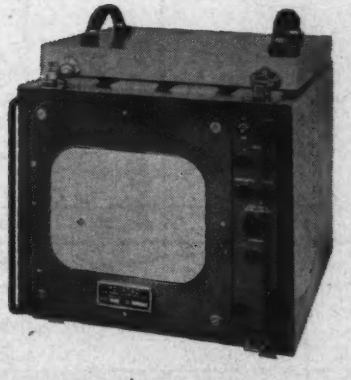

STUDIO PICTURE MONITOR

Model M-105

A high fidelity picture monitor of large size, sufficient for ease of observation under studio conditions. It is a high impedance device and may be connected across a video transmission line without affecting the terminal impedance of the line. Monochrome and/or color signals in black and white reception is provided.

See us at Booth 2-511, Radio Engineering Show

from qualitative indicators
to *precision measuring* devices . . .
with the *new*

tight-tolerance

CATHODE-RAY TUBES
by
DU MONT

Compare the first of the new Du Mont line of high-precision cathode-ray tubes, the Types 5ADP- and 3WP- with similar cathode-ray tubes, previously available. Notice the improved resolution without loss in brightness, the greatly tightened tolerances on all critical specifications, the greatly increased sensitivity, and the characteristics now specified that have never before been published:

ITEM	5CP-A	5ADP-	3GP-	3WP-
Angular Alignment	90° ± 3°	90° ± 1°	90° ± 3°	90° ± 1°
Grid Cutoff per Kv of Eb2	30V ± 50%	30V ± 25%	33V ± 50%	40V ± 25%
Deflection Factor DCV/in/KV of Eb2 D1D2 D3D4	 46V ± 15% 39V ± 15%	 30V ± 10% 23V ± 10%	 80V ± 20% 70V ± 20%	 46V ± 10% 32V ± 10%
Line Width	No spec	.03" max.	No spec	.026" max.
PI Light Output	No spec	15 ft. L. min.	No spec	7 ft. L. min.
Modulation[1]	No spec	45V max.	No spec*	50V max.
Deflection Non-Linearity	No spec	2% max.	No spec	2% max.
Pattern Distortion[2] Square size A Square size B	No spec	 3.075" 2.925"	No spec	 2.050" 1.950"
Minimum Useful Scan D1D2 D3D4	 ± 2¼" from center ± 2¼" from center	 ± 2" from center ± 2" from center	 ± 1⅜" from center ± 1⅜" from center	 ± 1¼" from center ± 1⅛" from center
Face Plate	Curved	Flat	Curved	Flat

[1] The amount of grid voltage required to drive the tube from cutoff to specified light output.
[2] With a raster pattern adjusted so that wider points just touch Square A, no point will lie within Square B.

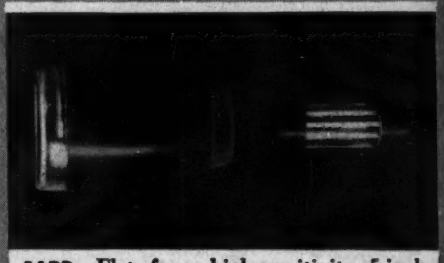

5ADP- Flat face, high-sensitivity 5-inch cathode-ray tube for medium and low accelerating potentials.

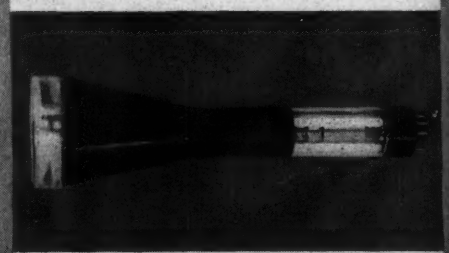

3WP- The 3-inch version of the Type 5ADP- with flat face and high sensitivity.

5XP-A High-voltage tight-tolerance cathode-ray tube unilaterally interchangeable with the Type 5XP-.

* *Available in Production Quantities . write for prices*

ALLEN B. DU MONT LABORATORIES, INC.
1500 Main Ave., Clifton, N. J.

98% of all U.S. TV stations use Houston-Fearless equipment

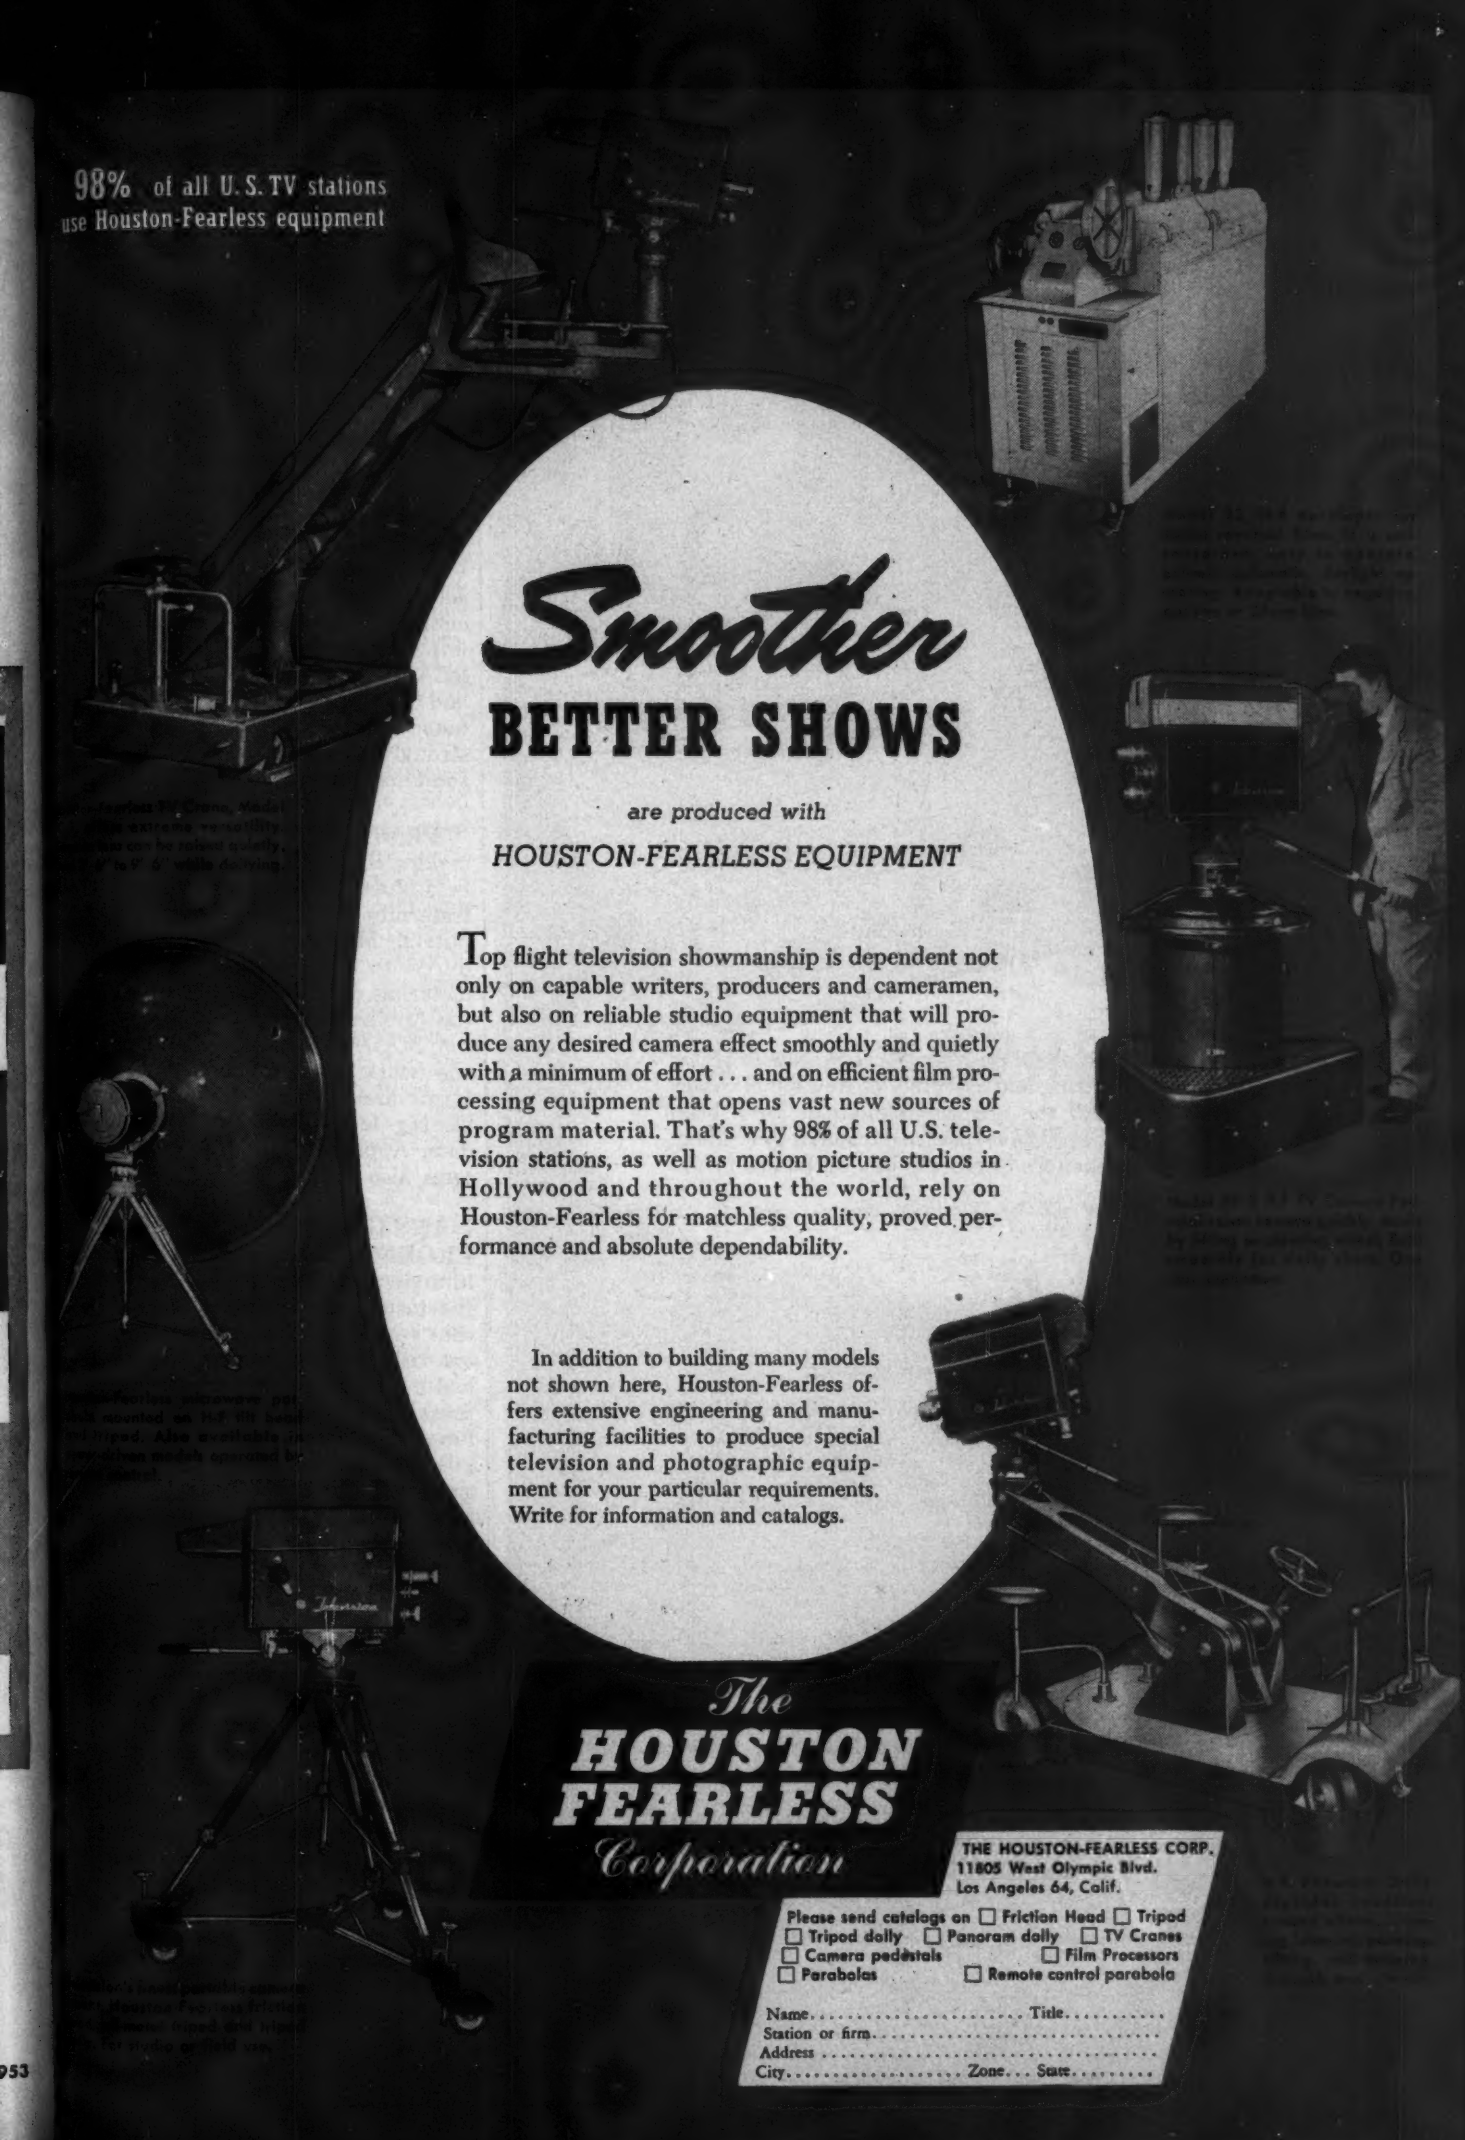

Smoother BETTER SHOWS

are produced with

HOUSTON-FEARLESS EQUIPMENT

Top flight television showmanship is dependent not only on capable writers, producers and cameramen, but also on reliable studio equipment that will produce any desired camera effect smoothly and quietly with a minimum of effort . . . and on efficient film processing equipment that opens vast new sources of program material. That's why 98% of all U.S. television stations, as well as motion picture studios in Hollywood and throughout the world, rely on Houston-Fearless for matchless quality, proved performance and absolute dependability.

In addition to building many models not shown here, Houston-Fearless offers extensive engineering and manufacturing facilities to produce special television and photographic equipment for your particular requirements. Write for information and catalogs.

The **HOUSTON FEARLESS** *Corporation*

THE HOUSTON-FEARLESS CORP.
11805 West Olympic Blvd.
Los Angeles 64, Calif.

Please send catalogs on ☐ Friction Head ☐ Tripod ☐ Tripod dolly ☐ Panoram dolly ☐ TV Cranes ☐ Camera pedestals ☐ Film Processors ☐ Parabolas ☐ Remote control parabola

Name..... Title.....
Station or firm.....
Address.....
City..... Zone... State.....

introducing

C-3 methods manual

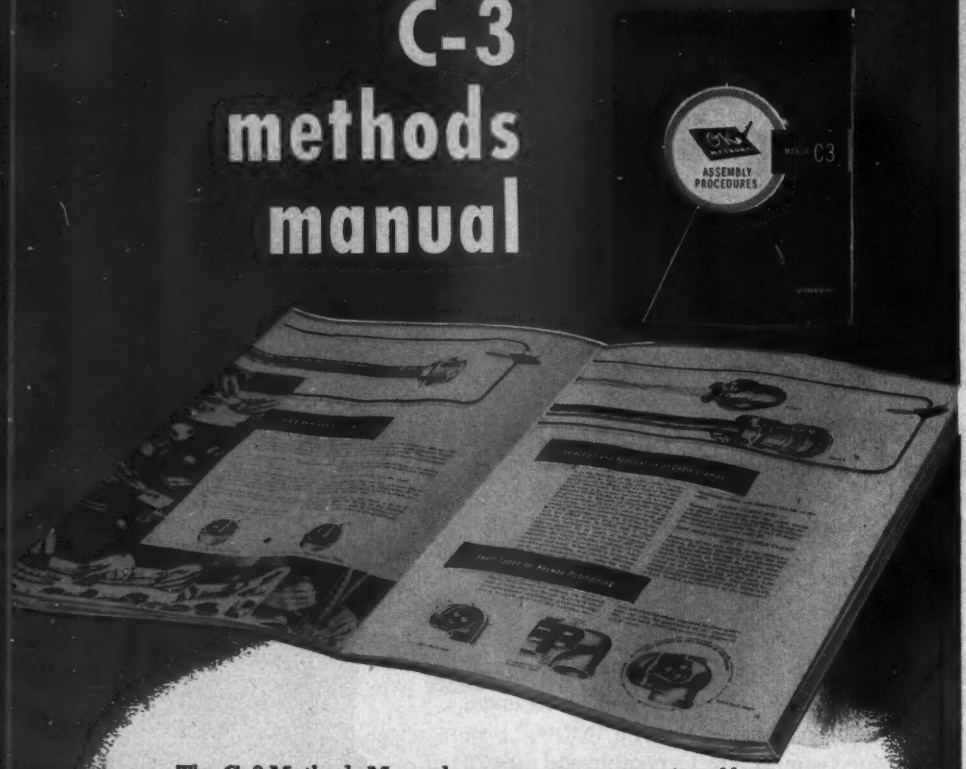

The C-3 Methods Manual represents a composite of better methods for the wiring and assembly of Amphenol cables and connectors. All the advocated methods have been compared, tested and have passed stringent screening, not only by Amphenol's engineers but by others in the field as well.

AMPHENOL

TELE-TIPS

DINA, IS THERE ANYONE FINER? A new twist on the song heroine is a compact machine called DINA (Digital Network Analyzer). The logical basis for this computer has been developed at the University of Penna. It appears to hold promise in solutions of Laplace, Poisson and similar equations. Although not as imposing as some of its big brothers—REAC, SEAC, UNIVAC, RAYDAC and others—the charmingly feminine name is a welcome guest in the field strongly dominated by its male-sounding counterparts.

FEMININE INFLUENCE is making itself felt in the telemetering field. Just as DINA has entered the fraternity of male-sounding computers, MADAM has been introduced to the roster of radio telemetering data devices. Designed by the Applied Science Corp. of Princeton, MADAM is used in guided missile work. It accepts data in raw forms and inserts appropriate processing for automatic reduction of data. Applications in industrial systems also suggest themselves.

INSULATION-EATING MICROBES cause electrical failures in underground cables by destroying the insulating material. Tests show that both natural and GR-S rubbers are vulnerable to fungus attack unless made fungitoxic. Even thin neoprene jackets may be permeable to fungi. For the benefit of crossword puzzle enthusiasts, two typical organisms found in the insulation have been identified as the Spicaria Violacea Abbot and Fusarium species.

SUPERSONIC FIREFIGHTING—At a recent "Conference on Future Risks" Dale Auck, Director of the Fire Protection Div. of the Federation of Mutual Fire Insurance Companies, predicted that supersonic waves rather than water may be used in the future to extinguish fires. Mr. Auck writes, "The matter of fire extinguishment through supersonic auditory means is merely an outgrowth of a common physics experiment with the Kundt's tubes, which demonstrates the nodes and anti-nodes of pressure within a closed tube when it is subjected to auditory impulse."

MEASURING WAVEGUIDE PLATING WITH RADIOACTIVITY is a new wrinkle reported by three physicists at Armour Research Foundation. Government standards call for microscopic examination of waveguide cross sections to determine plating thickness. Present tests take from three to four hours and have the disadvantage of destroying the waveguide tested. Bombarding waveguides with radioactive radium-berylium, however, forms radioactive isotopes of silver, and the resulting radiation measured by Geiger counters affords a highly accurate picture of plating thickness. The new process takes only about five minutes, and accuracy is to 10 millionths of an inch.

X-RAY EYE which can detect liquid or powder levels inside sealed metal containers, has been developed by Milwaukee GE engineers using cadmium-sulphide crystals. Ordinarily a non-conductor, cadmium sulphide under impact of x-rays, passes an electric current. Thus to inspect levels of powder in hand grenades, beer or juices in cans, etc., an 80,000-volt x-ray tube sends a beam across the production line, and any container not properly filled instantly operates a relay which tosses the deficient container into a "reject" box.

LOUDSPEAKER STANDARDIZATION—Recently a fast and simple method of testing loudspeaker's power output has been reported by three physicists at the Armour Research Foundation. Technique consists of "bottling" speaker output in a reverberation room and dispersing the sound waves evenly and continuously by two 6x15 ft. rotating vanes. A reading at any point within the room shows total output. From this figure efficiency can be calculated. This new method takes less than an hour to perform and entails but one reading. By way of contrast, the classic method of measuring output is to sum the sound level readings around the speaker radiation pattern.

CAR GOING UP! Station WHIO, Dayton, Ohio, is replacing its present 500-ft. TV tower with a new 1,104-ft tower and antenna. This new Blaw-Knox structure will be equipped with an elevator, enabling engineers and workmen to ride comfortably to the top of the steelwork to service or adjust the antenna, warning lights, etc.

(Continued on page 49)

AMPHENOL

The majority of Amphenol electronic components—and there are now over 9,000 in the standard line—were developed first to fulfill a specific application problem arising in the industry. When you consult with Amphenol Engineers in solving your electronic and power application needs, you will be working with one of the most specialized engineering staffs and testing laboratories in the electronic world.

visit AMPHENOL
booths 1-101 and 1-102

I. R. E. CONVENTION
MARCH 23-26, 1953
GRAND CENTRAL PALACE
NEW YORK

AMERICAN PHENOLIC CORPORATION
1830 South 54th Avenue • Chicago 50, Illinois

NAME.....

COMPANY.....POSITION.....

ADDRESS.....

CITY.....ZONE.....STATE.....

Completely

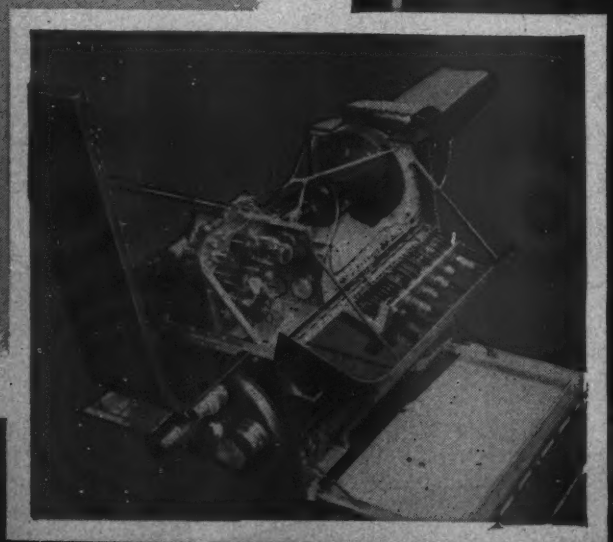

New accessibility puts every component at your fingertips. One latch opens both hinged sides and top. Dual bar handles provide better grip and easier carrying.

RCA Television

New!

RCA TV CAMERA

TYPE TK-11A

Here is the all-new TV camera the industry is talking about. The camera the leading networks are planning to use in their new Hollywood studios! The camera which will be used in most of the new stations this year—and next!

Leading network engineers (after careful tests) have proclaimed the TK-11A the finest camera ever produced, easiest in the world to handle, and the simplest one to get at.

The TK-11A has all the proven performance of the world-renowned RCA TK-10—plus these new features:

NEW *7-inch* viewfinder picture tube produces larger, brighter, and sharper pictures to help the cameraman.

NEW plug-in, high-stability video amplifier—with frequency response uniform to 8.5 Mc.!

NEW fixed-position alignment coil for the Image Orthicon. Electrical control of coil eliminates all mechanical adjustments!

NEW plug-in blower for cooling the deflection coil and the Image Orthicon!

NEW electronic-protection system guards your Image Orthicon against deflection failure, or loss of driving signals.

NEW "overscan" control takes burden off Image Orthicon during warm-ups and rehearsals; new vertical reverse switch for film pick-ups.

For complete information on the TK-11A, call your RCA Broadcast Sales Representative.

RCA

RADIO CORPORATION of AMERICA

ENGINEERING PRODUCTS DEPARTMENT CAMDEN, N.J.

Speer makes it easy for you to choose the right Carbon resistor!

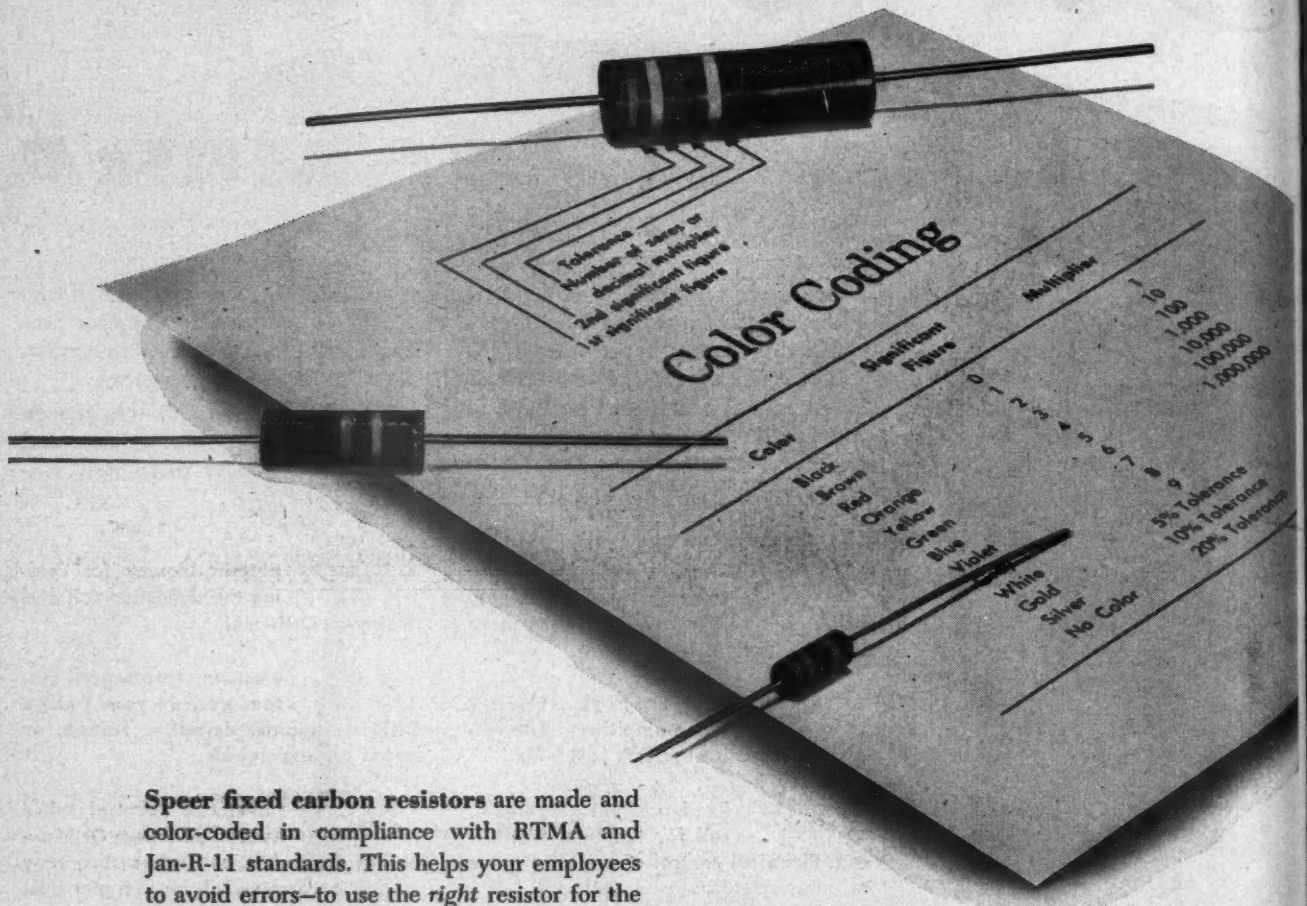

Speer fixed carbon resistors are made and color-coded in compliance with RTMA and Jan-R-11 standards. This helps your employees to avoid errors—to use the *right* resistor for the circuit every time.

Speer resistors are made better – are the right resistors for *every* circuit. By using very high pressure to create an inseparable bond between the protective phenolic shell and the carbon core, Speer gives its resistors these important advantages:

1. More efficient heat transfer.
2. Greater ability to sustain overloads for long periods of time.
3. Uniform diameter resistive element for the entire length of the resistor, which eliminates weak points and potential burn-outs.
4. Uniformly thick protective covering over the entire length, which eliminates low-voltage breakdown between resistive element and adjacent conductor – makes for minimum change in resistance when subjected to adverse humidity conditions.

All shipments of Speer resistors are given numerous tests for resistance rating, and are backed by a minimum resistance change when exposed to an accelerated ten-day humidity test. Speer manufactures a complete line of ½, 1 and 2 watt resistors in all standard values from 10 ohms to 20 megohms. Nonstandard values are available for special applications.

Write today for your free copy of Speer Resistor's new complete catalog

SPEER RESISTOR

SPEER RESISTOR DIVISION
SPEER CARBON COMPANY
St. Marys, Pennsylvania

Other Divisions: Jeffers Electronics
International Graphite & Electrode

550 TO 3800 MEGACYCLES

with Sylvania 6BM6 Broadband Tunable KLYSTRONS

Sylvania now offers 4 different Klystron types, designed for external cavity resonators covering a frequency range from 550 to 6500 megacycles.

Types 6BM6 and 6BL6 are designed for CW applications, while types 5836 and 5837 may also be used in pulse modulated oscillation.

Sylvania Klystrons provide continuous tunable output over wide ranges of the micro-wave spectrum. New illustrated catalog gives complete specifications. Mail the coupon for your copy now.

We also welcome your inquiries regarding the designing of cavities for various types of circuits.

Typical Power Output vs. Frequency Characteristics For Type 6BM6

MODE	RESONATOR VOLTAGE
1¾	325 VOLTS
2¾	300 VOLTS

SYLVANIA

ELECTRONIC DEVICES; RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Sylvania Electric Products Inc.
Dept. 3E-3003, 1740 Broadway
New York 19, N. Y.

Please send me new catalog describing Sylvania's line of Reflex Klystrons.

*Name*_____

*Street*_____

*City*_____ *Zone*____ *State*____

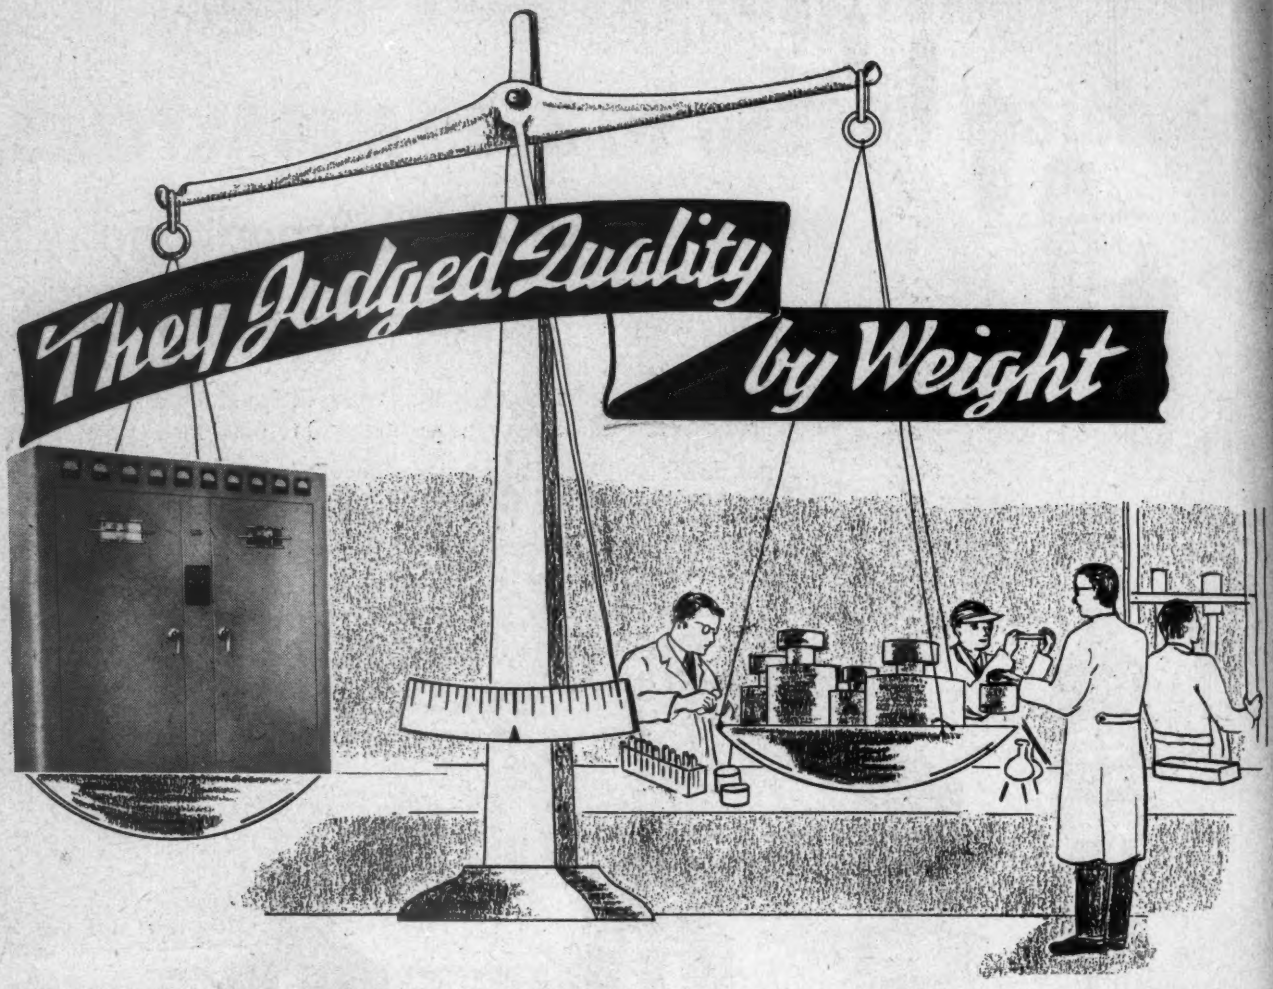

Through the centuries weight and quality have gone hand in hand. With few exceptions, the greater the weight the better the quality.

The super ocean liner was always the one of the greatest tonnage. The 5000 horsepower locomotive pulling one hundred car trains was heavier. Gold is even among the weightiest of metals and, yes, even the finer airliners are largely superior because of greater weight. There are few exceptions indeed where the heaviest is not the greatest in its class.

This is most assuredly true in commercial radio equipment. There is no substitute for more iron in transformers, more copper in windings, additional shields around vulnerable audio transformers, larger capacitors and full-fledged circuit design . . . weightwise, that is. In short, you can't have it if it isn't there.

The moral of this discourse on weight is this: We invite you to check the weight of any Gates product. You will often find it heavier. Even so, a typical Gates product has both chassis and panel of aluminum. — This means the added weight is where it counts, in transformers, capacitors and other husky parts. — Gates has never designed to meet a price . . . rather, it has priced after bringing forth the best possible design.

Weight and quality are parallel. The next time you buy . . . check the weight. In most instances Gates will tip the scales heaviest.

GATES BC-1F Air-Conditioned 1000 watt broadcast transmitter, weight packed 2850 lbs, size 78" high, 72" wide, 33" deep. Broadcasting's largest, heaviest quality-filled broadcast transmitter in the 1000 watt field.

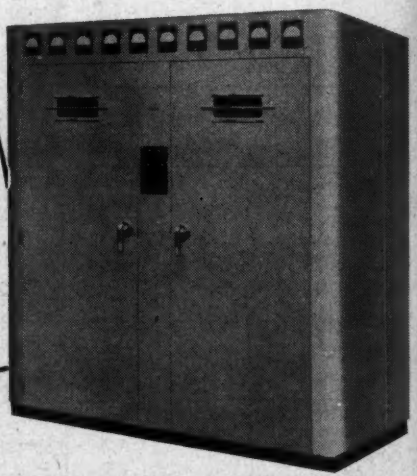

GATES

GATES RADIO COMPANY • QUINCY, ILLINOIS, U. S. A.

manufacturing engineers since 1922

2700 Polk Avenue, Houston, Texas — Warner Building, Washington, D. C. — International Division, 13 E. 40th St., New York City
Canadian Marconi Company, Montreal, Quebec

See our exhibit at Booth 4-213 (Fourth Floor), IRE Radio Engineering Show,
Grand Central Palace, New York, March 23-26

Aircraft Transformer Corporation, Long Branch, N. J. • Long Branch 6-6250 • Manufacturers of Inductive Equipment

Pulse Transformers • Saturable Core Reactors • Metal Encased Transformers • Form Flex • Oil Filled Form Flex • Wound Cores • Relays
Epoxy Cast Transformers • High Temperature Transformers • Resonant Charging Chokes

G-E TUBES AT THE

Everything for u-h-f TV!..

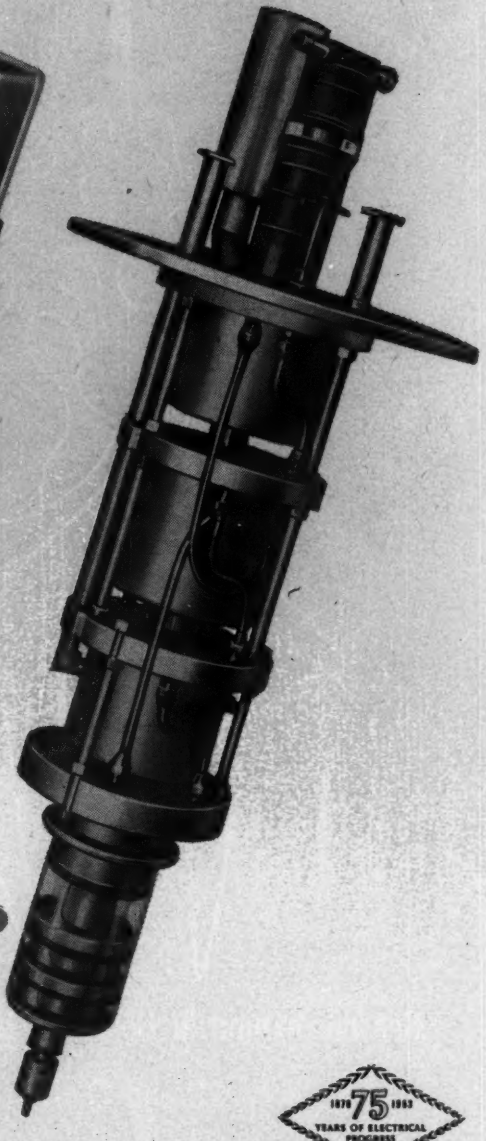

New...

GL-6283—250-w G-E driver tube for u-h-f transmitters. Air cooled, compact, up-to-the-minute in design. Can be installed in seconds!

Tops in Power!...

GL-6237 through GL-6242—15-kw klystrons for final transmitter power stage. The 6 types in order handle all frequencies 470 mc to 890 mc. G-E klystrons are the *highest-power u-h-f TV tubes,* giving superior transmission at 200 kw E.R.P.

1878 75 1953
YEARS OF ELECTRICAL PROGRESS
Diamond Anniversary

MAKE HEADLINE NEWS I.R.E. SHOW!

TV DESIGNERS: see these—and other—G-E pace-setting u-h-f types at the March I.R.E. Show. Get all ratings and characteristics! TV MANUFACTURERS: learn how G-E tubes can help you successfully (1) meet stiff 1953 price competition, (2) establish new, higher standards of equipment performance, both transmission and reception!

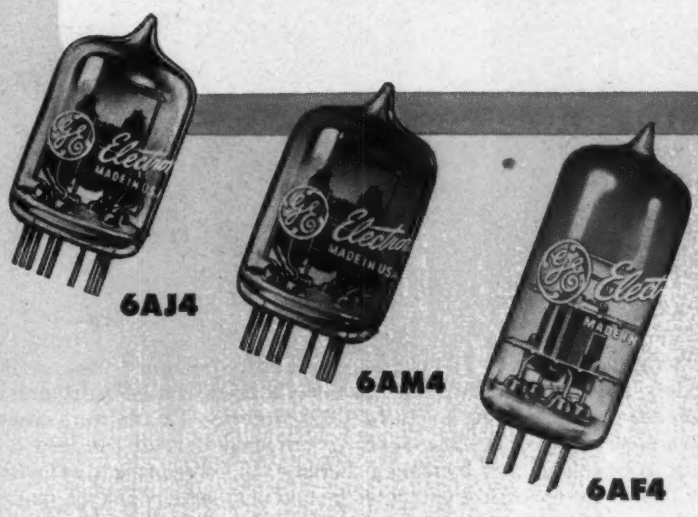

82-Channel Tuner Triodes

Trio of G-E tuner tubes for TV receivers, with a combined v-h-f, u-h-f frequency range that makes *single-dial 82-channel tuning* practical and economical.

GENERAL ELECTRIC

183-1A3

Announcing New Wollensak

TV RAPTAR LENSES

Wollensak TV Raptar Lenses are specially designed for tomorrow's advancements as well as today's television requirements . . . are designed specifically for TV cameras. TV Raptars come *complete,* with camera mounts an integral part of the lens . . . not to be added later by some other supplier. From start to finish . . . from the selection of the raw materials to the last of many inspections . . . every operation is done in the Wollensak Optical plants. This assures you of the finest of TV images.

There are 14 Wollensak TV Raptar Lenses, coated, ranging in focal length from 2" to 24". In addition there is the 40" Mirrotel lens for telecasting baseball, football and other outdoor spectacles.

Write for new TV catalogue and price list.

Raptar . . . the MASTERPIECE of Lenses

There is only one Raptar . . .
The finest lens made . . .
The finest lens made by Wollensak . . .

Wollensak OPTICAL COMPANY, ROCHESTER 21, N. Y.

For Excellence in Performance . . .

PYRAMID *subminiature* "GLASSEAL" CAPACITORS

For the most demanding applications, where top-quality and minimum-size considerations are the most vital factors, Pyramid "Glasseal" capacitors are the popular choice.

This attractive new catalog PG-3, incorporating complete engineering data, styles, sizes, and capacitance and voltage ranges is now available.

Power Factor vs. Temperature Curve

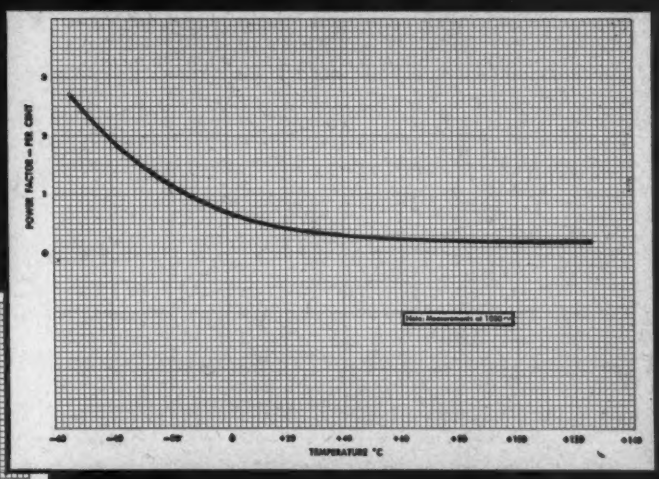

% Capacitance Change vs. Temperature

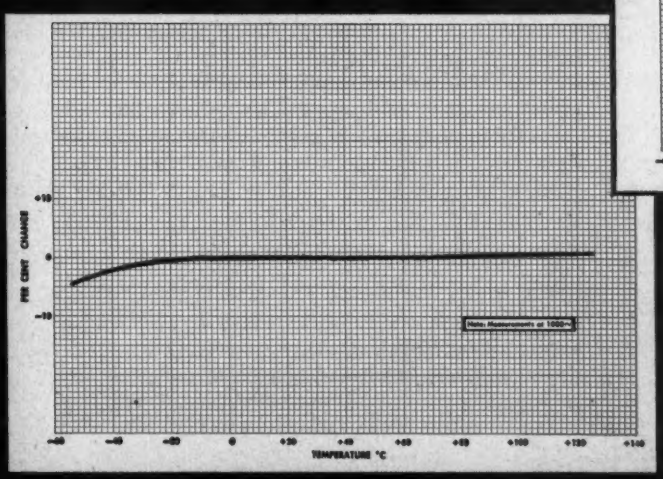

These graphs show typical performance characteristic of the Pyramid "Glasseal X" type, which is designe for 125 C. operation. Full information on all "Glassea capacitors is provided in new catalog PG-3.

Visit Booth 2 - 310 I. R. E. Convention

For your free copy, please address letterhead request to Department E1

PYRAMID ELECTRIC COMPANY

1445 HUDSON BOULEVARD • NORTH BERGEN, N. J.

NEW WESTINGHOUSE 2000 MC MICROWAVE GIVES YOU A 5-POINT PACKAGE ADVANTAGE

1 Extra Flexibility. Design permits quick, easy changes of units to meet future changes or expansion.

2 Adaptability. Multiplex units are designed to operate readily with any type of interconnected equipment.

3 Dependability. Only the radio equipment is common to all channels; voice multiplexing units are completely self-contained, function independently of each other.

4 High Channel Capacity. Up to 30 duplex voice channels or 450 telegraph channels, or intermediate combinations of both.

5 Minimum Maintenance. Time-proven double sideband modulation in the multiplexing equipment provides reliable operation.

THE WESTINGHOUSE INTEGRATED PACKAGE

Westinghouse will deliver a microwave system to you on a turn-key basis. The package is fully integrated — since Westinghouse has full experience in all related types of equipment such as supervisory control, telemetering, and other telegraphic or voice functions.

GET THE FACTS

Check full details through your Westinghouse representative. Write or call Department P-60, Microwave Section, Westinghouse Electric Corporation, 2519 Wilkens Avenue, Baltimore 3, Maryland.

YOU CAN BE SURE... IF IT'S Westinghouse

J-02260

Why Electron Tube Buyers do business with Tung-Sol

Why the Mallory **UHF** Tuner Should be Part of Your New TV Plans

The Mallory UHF Tuner can be the complete answer to your UHF tuning problems . . . whether you build converters, all-channel receivers, or both. It consists of three sections of variable inductance. It covers the range between 470 and 890 megacycles with approximately 2 mf of shunt capacity. Selectivity is excellent over the entire band.

No matter how you decide to handle the problem of UHF reception, it will pay you to investigate the various possibilities offered by the Mallory UHF Tuner. One of the following combinations is the answer to your requirements . . .

FOR CONVERTERS . . .

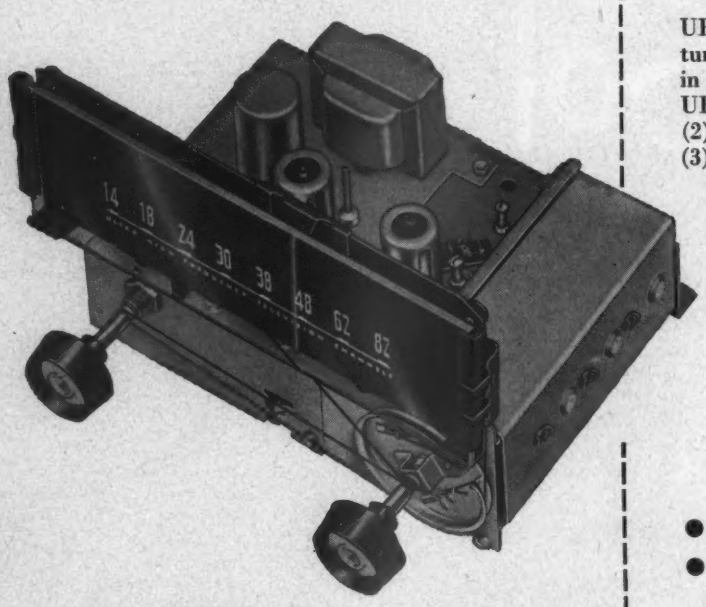

- Mallory UHF Tuning element for manufacturers building their own converters.
- Mallory UHF Converter chassis . . . ready to mount in your cabinet.
- Complete Mallory UHF Converter with your brand label.

FOR RECEIVERS . . .

UHF Tuners, for use in combination with VHF tuners, are available in 3 different designs . . . each in 3 different stages of assembly: (1) To convert UHF signals to 82 megacycles on channels 5 or 6. (2) To convert UHF signals to 130 megacycles. (3) For operation into a 41 megacycle IF amplifier.

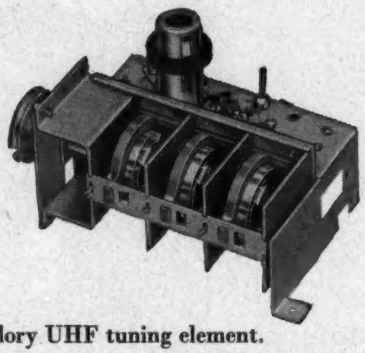

- Mallory UHF tuning element.
- Mallory RF assemblies. This includes the tuner, oscillator, tube, crystal and associated circuitry.
- Mallory RF assemblies with an IF amplifier operating at conversion frequency.

Get in touch with us regarding the Mallory UHF Tuner. We will be glad to work with you . . . see how these various possibilities can be fitted into your plans for UHF television. Write today.

Television Tuners, Special Switches, Controls and Resistors

P. R. MALLORY & CO. Inc.

MALLORY

SERVING INDUSTRY WITH THESE PRODUCTS:

Electromechanical—Resistors • Switches • Television Tuners • Vibrators

Electrochemical—Capacitors • Rectifiers • Mercury Dry Batteries

Metallurgical—Contacts • Special Metals and Ceramics • Welding Materials

P. R. MALLORY & CO., INC., INDIANAPOLIS 6, INDIANA

Why you can expect plus performance from standard RCA receiving tubes...in every field

Over the years RCA has fostered the use of advance design and quality-control techniques in tube manufacture. Since World War II, RCA has stepped up its continuing program for quality improvement. As a result, the *standard* RCA receiving tubes of today often provide the superior performance and reliability usually expected from specialty-designed types of other manufacturers.

In addition to this built-in performance security, standard RCA receiving tubes cover a wide range of types, are inexpensive, and are readily available both to the equipment designer and the ultimate user.

RCA Application Engineers are ready to consult with you on the adaption of standard RCA receiving tubes to your equipment designs. For further information write RCA, Commercial Engineering Section 57 CR, Harrison, N. J.... or contact the nearest RCA Field Office: **(East)** Humboldt 5-3900, 415 S. 5th St., Harrison, N. J. **(Midwest)** Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill. **(West)** Madison 9-3671, 420 S. San Pedro St., Los Angeles, Calif.

10 reasons why standard RCA receiving tubes offer built-in Performance Security

- ☆ The cathode base metal and the carbonate coatings are individually matched for each tube type to provide superior performance. Both are continuously RCA-engineered for maximum quality control.
- ☆ The specially processed carbonized nickel-coated anodes developed and used by RCA provide 97% of the radiating effectiveness of a true black body as compared with the 68% figure for the older-style carbonized nickel-plated anodes. This increased effectiveness means better life for RCA tubes because the anodes operate at lower temperatures.
- ☆ Lead-glass envelopes at a cost differential of about 10 to 1 compared to lime-glass envelopes are used by RCA for certain capped types which operate at very high voltages. Such use results in much better life performance.
- ☆ Gold-plated grids are used in certain RCA tube types for better control of critical tube characteristics.
- ☆ The RCA-developed "A" frame construction—used in 6 of the popular metal types—gives rigidity to the tube elements and provides increased resistance to vibration, thus reducing microphonics and stabilizing tube characteristics.
- ☆ Strict mica tolerances, tighter than usual in the industry, provide improved stability and freedom from microphonics.
- ☆ Certain RCA tubes incorporate cathode clips and inverted-pinched cathodes to provide improved ability to withstand vibration; as a result there is greater freedom from microphonics. RCA types for battery operation use a filament damper bar to minimize microphonics.
- ☆ RCA not only uses the highest quality mica but also utilizes a higher percentage of sprayed micas than industry in general. These precautions provide greater freedom from leakage noise and other internal leakage effects.
- ☆ Double-helical coil heaters are used in many types to provide more reliable performance and to insure greater freedom from hum.
- ☆ Each RCA receiving tube has been designed to minimize the number of welds. With such designs there are fewer points at which possible failure can develop. As an additional precaution, RCA welding is done on accurately timed unit welders to insure that each weld has maximum strength and uniformity.

RADIO CORPORATION of AMERICA
ELECTRON TUBES — HARRISON, N. J.

SILECTRON C-CORES...BIG or LITTLE

...any quantity and any size

Wound from precision rolled oriented silicon steel strip as thin as .00025"

WSD 4363

For users operating on government schedules, Arnold is now producing C-Cores wound from ¼, ½, 1, 2, 4 and 12-mil Silectron strip. The ultra-thin oriented silicon steel strip is rolled to exacting tolerances in our own plant on precision cold-reducing equipment of the most modern type. Winding of cores, processing of butt joints, etc. are carefully controlled, assuring the lowest possible core losses, and freedom from short-circuiting of the laminations.

We can offer prompt delivery in production quantities—*and size is no object, from a fraction of an ounce to C-Cores of 200 pounds or more.* Rigid standard tests—and special electrical tests where required—give you assurance of the highest quality in all gauges. ● *Your inquiries are invited.*

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

General Office & Plant: Marengo, Illinois

DISTRICT SALES OFFICES

New York: Empire State Bldg. Los Angeles: 3450 Wilshire Blvd.

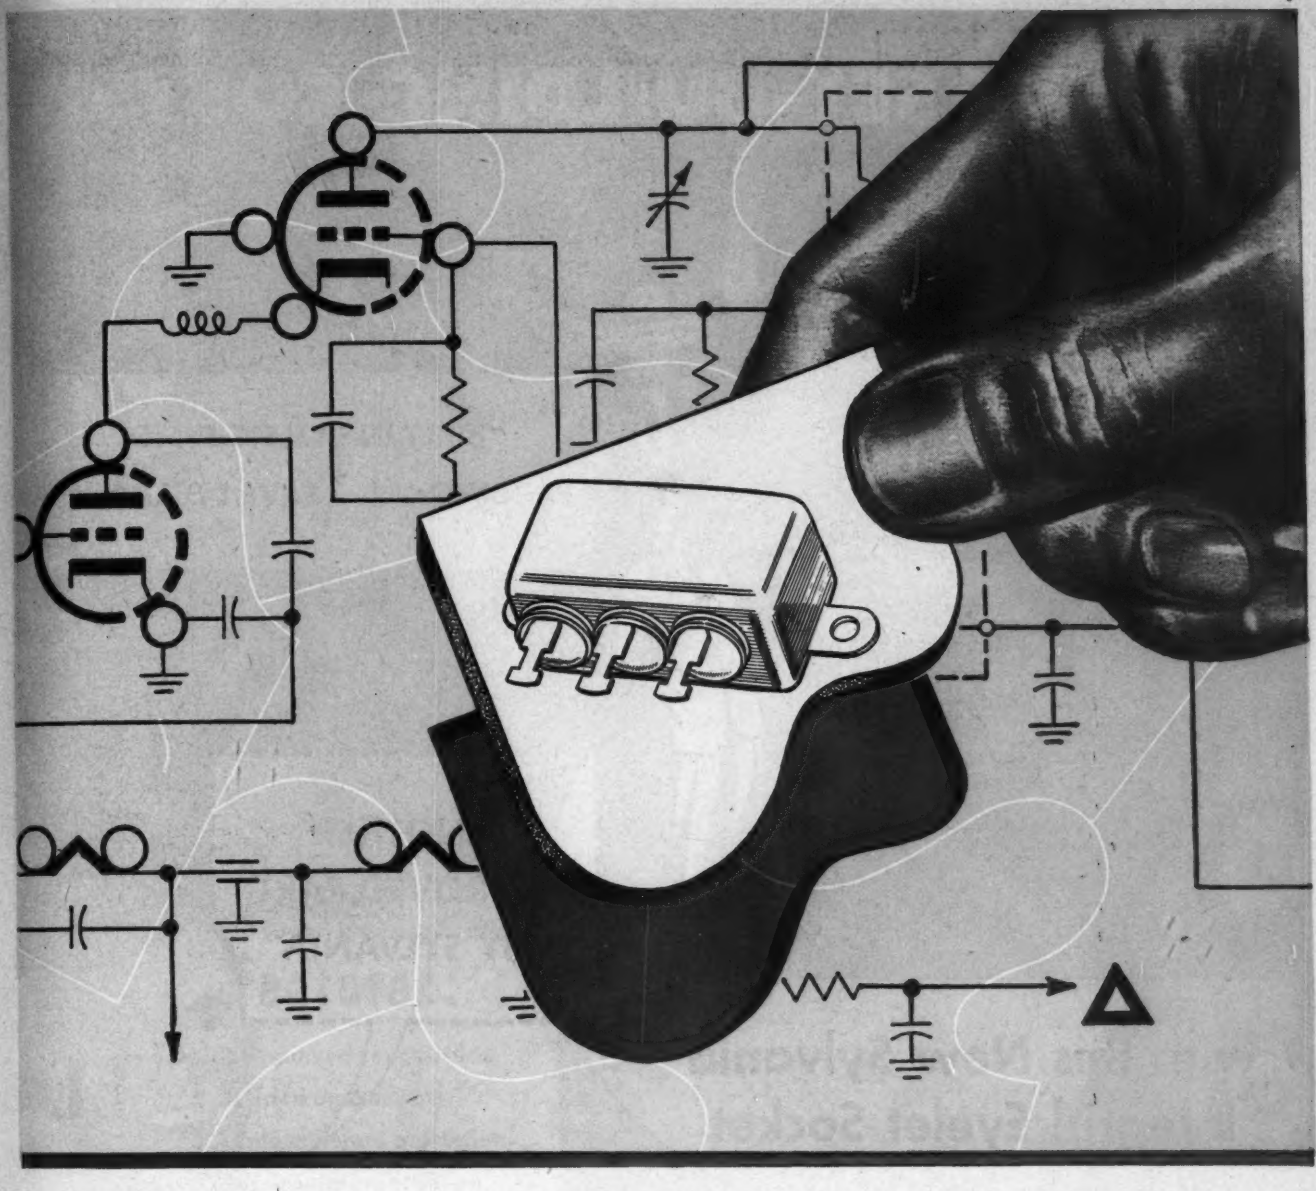

Function-Fitted capacitors

The *best* capacitor at *lowest* cost results from the experienced interpretation of your circuitry, your associated components, your operational requirements.

That is why Aerovox engineers are so interested in HOW their capacitors are used. If you wish, they are prepared to collaborate on the details of your entire assembly.

Such capacitor application experience, *second to none*, is yours for the asking.

AEROVOX capacitors

AEROVOX CORPORATION

NEW BEDFORD, MASS.

Hi-Q® DIVISION
OLEAN, N. Y.

WILKOR DIVISION
CLEVELAND, OHIO

REDUCE SET-BUILDING COSTS..

with this New Sylvania Integral Eyelet Socket

You'll speed up radio and television set assembly and pare down costs with this new Sylvania socket!

The eyelets are formed into the saddle and *actually function as rivets.* Just 2 simple operations and these sockets are firmly secured to the chassis. You save rivet costs, save time, and get a sturdy, durable, top-quality job.

Made with 3 types of bases

These new Sylvania sockets are now available with 7-pin, octal, or 9-pin bases. Insulators are either general-purpose or low-loss phenolic.

For prices and full information about this latest Sylvania quality part, write today to: Sylvania Electric Products Inc., Dept. 3A-3003, 1740 Broadway, New York 19, N. Y.

SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

INTERNATIONAL RECTIFIER CORPORATION

EL SEGUNDO
CALIFORNIA

Germanium Diodes

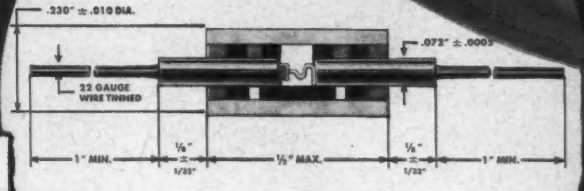

Features:

1. Ruggedized construction
2. Welded anchor pins
3. Triple moisture protection
4. Self-insulating case
5. Vibration resistant
6. Shock resistant
7. Higher efficiency
8. Stability of characteristics
9. No flaking

All types available for prompt shipment

Types Available
IN38
IN51
IN52
IN53
IN54
IN59
IN60
IN63
IN64
All types

INTERNATIONAL RECTIFIER
C O R P O R A T I O N

General Offices: 1521 E. Grand Ave., El Segundo, Calif. • Phone: El Segundo 1890
Chicago Branch Office: 205 West Wacker Drive • Phone: Franklin 2-388-9
New York Branch Office: 12 West 32nd Street, N. Y. 1 • Phone: Chickering 4-0017

NEW!

Gray Telojector

—for automatic projection of 2x2 slides in unlimited, uninterrupted sequence!

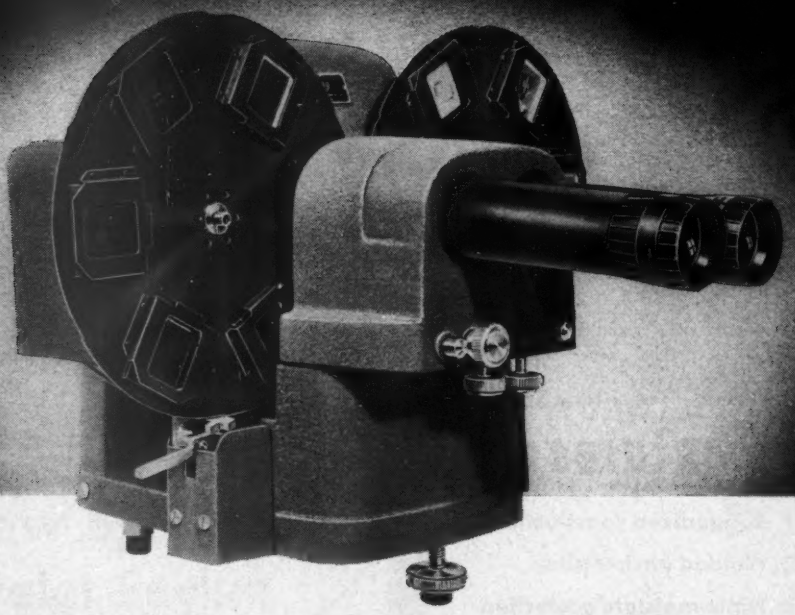

You've *always* needed it—for low-cost, professional-quality TV commercials—and here it is! Gray Research, maker of Telop, Telop II and other specialized TV equipment, proudly announces the new Gray TELOJECTOR. This compact, portable unit gives you *remote control* projection of standard 2x2 slides in uninterrupted sequence . . . with studio effects of fading, lapping and superimposition.

In the TELOJECTOR, projection alternates between two lens systems. Two loaded slide turrets give you a sequence of twelve slides. Additional loaded turrets can be substituted in seconds, providing an *unlimited* sequence. Overall dimensions: 14½" x 18½" x 16". Weight: 32 pounds.

This new Gray TELOJECTOR solves many problems for large and small stations alike. Production is underway. Get *all* the facts —*now!*

Please write for TELOJECTOR Bulletin RC-3

GRAY RESEARCH

AUDOGRAPH

AND DEVELOPMENT CO., INC., HILLIARD STREET, MANCHESTER, CONN.
Division of The GRAY MANUFACTURING COMPANY—Originators of the Gray Telephone Pay Station and the Gray Audograph and PhonAudograph

TELE-TIPS

(Continued from page 29)

CABLE RADAR—Electric light, phone and telegraph companies have a new method for locating distant breaks in their lines. It employs the radar technique and consists in sending a wave impulse into the open-ended conductor and then measuring the time taken for the reflected impulse to return. Knowing the characteristics of the line by comparison with an unbroken conductor, the distance to the break can be readily computed.

ADJACENT CHANNEL COLOR-TV—NTSC (National Television System Committee) has appointed a group to look into Paul Raiburn's (Paramount Pictures) recent suggestion, as voiced in the pamphlet entitled "Color Television Without Problems," that we use adjacent channels for color-TV transmissions. For further details on this suggestion see page 74 in *Tele-Tech*, January 1953.

COCKROACHES IN TV sets are almost entirely harmless. At least that is the official assurance given to the public by the Director of Rodent Control for the District of Columbia after several complaints of infestation prompted a studied investigation of the subject. The brown-banded cockroach only eats a little excess glue off connections and does not meddle with actual receiver operation.

PROCEEDINGS of the Iceland Parliament at Reykjavik will now be preserved for future generations of Icelanders via tape-recording equipment. Eleven Stancil-Hoffman (Hollywood) tape-recording units were recently installed in Iceland's two main chambers of parliament. Thus, the oldest legislative body in the world, created in 930, becomes one of the first with completely modern recording facilities. This enlightened republic of 141,000 people, where illiteracy is virtually unknown and where more books, newspapers and magazines per capita are published than any other country in the world, will record the entire proceedings of its General Assembly's continuous debate for the edification of its entire population. Taxpayers can now tab each Krona spent by the Iceland government.

"OUT OF CRISIS comes opportunity!"—Don G. Mitchell, President Sylvania Electric Products, Inc.

(Continued on page 60)

American offers you the "Full-Vision" line of quality microphones, a complete line for television and radio broadcast—AM and FM, motion picture studios, professional and home recording, and public address.

Pioneers in the design and manufacture of quality microphones, American has also pioneered the introduction of quality microphones that are designed to be . . . *HEARD AND NOT SEEN.*

Attractive "Full-Vision" styling permits both the artist and the audience to enjoy perfect performance without obstructing the view.

FULL VISION

For greater fidelity . . . plus . . . "Full-Vision" for artist and audience . . . use American.

DYNAMIC AND RIBBON CARDIOID	DYNAMIC AND RIBBON CARDIOID	RIBBON BI-DIRECTIONAL	DYNAMIC OMNI-DIRECTIONAL	DYNAMIC OMNI-DIRECTIONAL
DR-330	DR-332	R-331	D-33	D-22

Write for Free Descriptive Literature and Catalogue No. 46. Dept. FV

American MICROPHONE CO.

370 SOUTH FAIR OAKS AVE. PASADENA 1, CALIFORNIA

keeping communications **ON THE BEAM**

JK PRODUCTS



the JK FD-12

FREQUENCY AND MONITOR MODULATION

Monitors any four frequencies anywhere between 25 mc and 175 mc, checking both frequency deviation and amount of modulation. Keeps the "Beam" on allocation: guarantees more solid coverage, too!

JK STABILIZED H-17 CRYSTAL

CRYSTALS FOR THE CRITICAL

The JK H-17 Crystal meets rigid airline requirements for compactness, light weight, rugged dependability. A Military type, it is hermetically sealed—dust and moisture proof —plated, quartz plate is shock mounted. One of many JK Crystals made to serve every need.

Ceiling Zero... Communications 100%

"Pea soup" over the field . . . and still the giants of air travel come in "on the beam". When visibility is poor, commercial pilots must rely on radio-radar equipment to bring their ship in safely. JK Crystals play an important role in this every day drama of keeping airlines communications "on the beam" in the air and on the ground.

THE JAMES KNIGHTS COMPANY
SANDWICH ILLINOIS

RADIO AND TELEVISION

By JOHN CROSBY

Music and Pictures

attempting with considerable pictures on television what he well with sound on the radio. ter all, is not —or shouldn't show, though ents of both.

from radio to d a formidable as essentially a tral show. Voices don't lend them- raphy very well. ouldn't transform n ordinary song- without ruining his show which sly built up over dio.

John Crosby

• • •

think, solved the problem very well. work on the Waring show is, in the the word, art photography. The dif- ween it and the other kind of art pho- simply that the pictures move. But combination of ght and shadow, of

"camera work on the Waring Show is ... art photography"

JOHN CROSBY

and the cameras are GPL

Columnist John Crosby, discussing not electronics but end results on the screen, calls the Waring show on CBS Television "pure television." Such results come from three things: Waring imagination, CBS Television techniques, and GPL camera chains.

> ***"The pictures move . . . are a combination of light and shadow, of form and substance that catch and hold the eye."***

A GPL extra in engineering accounts for much of this. Camera and operator may be moving on a boom in a 3-dimensional pattern. Yet the operator has only to concentrate on aim, while the director at the Camera Control Unit adjusts the iris for light and shadow.

> ***"The cameras seem to roam at will on that show with a fluidity and grace almost never found in the movies."***

That fluidity is engineered into GPL cameras. Dual focus knobs, push-button lens change with automatic focus adjustment, precision pan and tilt motions—all these enable camera men and directors to capture the full scope of a show. Fantasy or stark realism, sports in sunlight or drama in stage shadows . . . GPL cameras put top quality pictures into the line.

Whatever your type of operation, whether you need one chain or six, investigate these cameras designed for *modern* television. Rugged but lightweight, they are easily interchangeable between studio and field. Circuit design guarantees consistent high quality.

Station owners like their economy; camera crews like their velvet smoothness and operating ease; maintenance men like their long service life.

NEW STATION OPERATORS:

Without obligation, GPL engineers will be glad to study your entire studio needs for cameras, projectors, film chains and video recorders.

For full details, write, wire or phone

General Precision Laboratory GPL

INCORPORATED

PLEASANTVILLE NEW YORK

Cable address: Prelab

Export Department:
13 East 40th St., New York City
Cable address: Arlab

TV Camera Chains • TV Film Chains • TV Field and Studio Equipment • Theatre TV Equipment

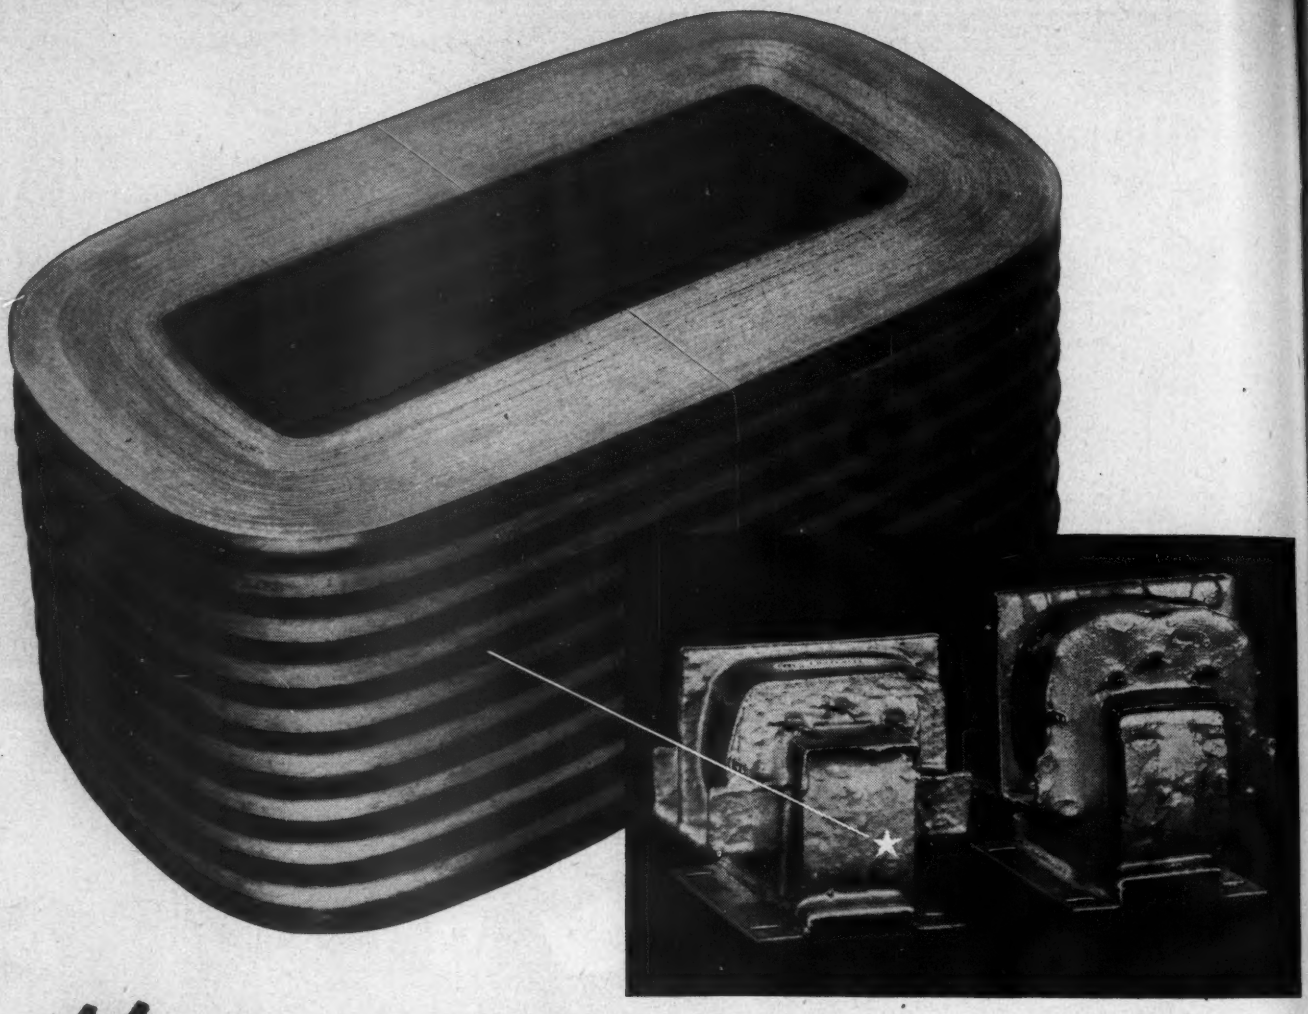

New HIPERSIL CORE

cuts air-borne transformer size and weight

Transformer weight reduced 25%, size cut 20% in a single unit of air-borne electronic equipment. This is the mark set by a new lightweight Hipersil® Core designed by Westinghouse for the Navy Bureau of Aeronautics.

Adaptable to commercial as well as military use, the new core makes possible more powerful equipment within the size and weight limitations of previous models. A special silicon steel, rolled to a new 4-mil thinness, with grain structure super-oriented by a refinement of the Hipersil process, achieves the size and weight reductions.

Hipersil Cores cut size and weight in *all types* of electrical and electronic transformers. They combine highest permeability with lowest losses in a wide range of sizes (1 through 5 and 12 mils). Two-piece assembly simplifies transformer manufacturing, cuts fabricating costs. Greater flux-carrying capacity, increased mechanical strength help to make them the best core on the market. For specific information on how to apply Hipersil Cores to your product, write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-70632

YOU CAN BE SURE.. IF IT'S Westinghouse

HIPERSIL CORES

let 'er go, skipalong,
stick with the "K" brand you know

"Maverick" usually spells trouble, on the production line as well as out on the range. Being an unknown quantity or a "Johnny-come-lately," it leaves room for genuine doubt both as to performance and quality. And that's the reason so many experienced buyers —production experts to supervisors—insist on Kester . . . the one "brand" that is synonymous with the best solder and solder products.

Next time, choose one of these famous solder products: "44" Resin, "Resin-Five" and Plastic Rosin—all made only by KESTER . . . Key Name in Flux-Core Solder for More Than 50 Years.

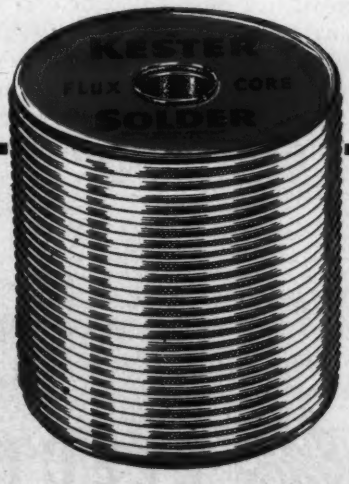

KESTER

SOLDER COMPANY

4210 WRIGHTWOOD AVENUE, CHICAGO 39, ILLINOIS
NEWARK 5, NEW JERSEY • BRANTFORD, CANADA

"A G-E TUBE SUGGESTION SAVED US $1,100!"

Says **GEORGE A. WILSON**
Director of Engineering
Radio Cincinnati, Inc.

"Two GL-5513's in our TV transmitter have had over 7,000 hours' service. That's three times the life we got from this type a while back—means a total of $1,100 we've saved in replacements! Better maintenance is part of the story, but the big reason is the advice G-E engineers gave us about matching up paired tubes so as to get balanced electrical characteristics.

"13,000 hours from a 6-tube bank of GL-8008 rectifiers—that's another economy figure in our records. Also, General Electric makes sure that when we need tubes, they're delivered *fast*. We couldn't ask for better all-around service than we get from G-E tube distribution here in Cincinnati!"

* * *

Your 16 years with WKRC, Mr. Wilson, gives you experience that makes your comments all the more important. G.E. is glad to have helped you realize these tube economies.

Station engineers everywhere will find G-E efficient tube service no farther away than their local G-E tube distributor—no harder to reach them than the telephone. Dial now the number of *your* distributor! The sooner he starts serving you, the sooner you will save money. *Tube Department, General Electric Company, Schenectady 5, N. Y.*

WKRC HAS A SHOW FOR EVERYBODY

● Variety and educational programs over WKRC supplement CBS network shows, giving Cincinnati viewers a wide choice of television fare. The second station in Ohio to receive a TV license, WKRC lives up to its reputation by also providing complete news and weather coverage. AM broadcasting, plus FM transit radio, are other services aired from the 600-foot WKRC tower. All three transmitting operations credit much of their reliability to General Electric tube performance.

You can put your confidence in—

1876 75 1951
YEARS OF ELECTRICAL PROGRESS
Diamond Anniversary

GENERAL ELECTRIC

Capacitors shown 2½ times actual size

CM-15 El Menco Capacitors range from 2 to 420 mmf. at 500 vDCw . . . measure only 9/32" x ½" x 3/16" . . . but they're

PRETESTED at 1000V!

WRITE FOR FREE SAMPLES AND CATALOG ON YOUR FIRM'S LETTERHEAD

ALL fixed mica El Menco Capacitors are *factory-tested at double their working voltage.* So, you can be sure they'll stand up. They also meet all significant JAN-C-81 specifications. This means that you can specify them with confidence for all military or civilian electronic applications.

Our Type CM-15 silvered mica capacitors reach 525 mmf. at 300 vDCw. Our other types — silvered and regular — provide capacities up to 10,000 mmf. Want samples for testing? *The Electro Motive Manufacturing Co., Inc., Willimantic, Conn.*

Jobbers and distributors are requested to write for information to Arco Electronics, Inc., 103 Lafayette St., New York, N. Y. — Sole Agent for Jobbers and Distributors in U. S. and Canada.

El-Menco

MOLDED MICA CAPACITORS

MICA TRIMMER

Foreign and Electronic Manufacturers Get Information Direct from our Export Dept. at Willimantic, Conn.

THE ELECTRO MOTIVE MFG. CO., INC. **WILLIMANTIC, CONNECTICUT**

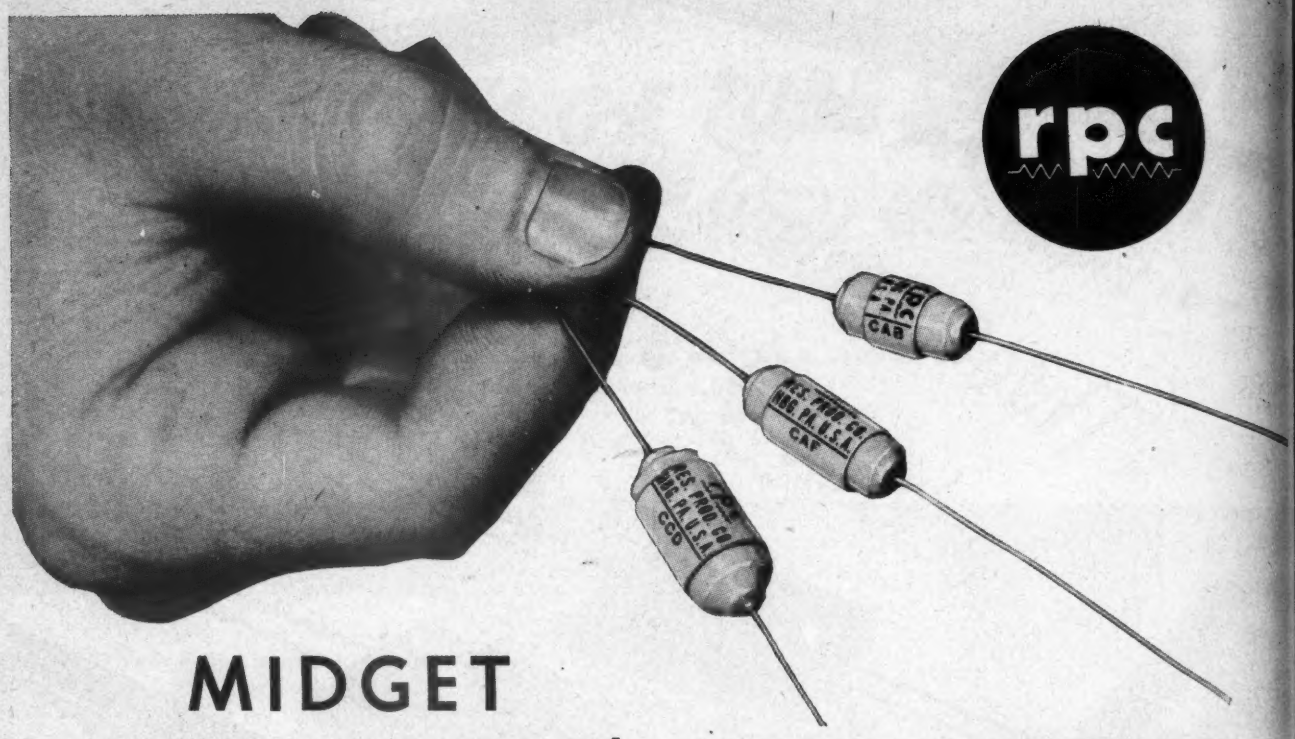

MIDGET
precision wire wound
RESISTORS

TYPE	DIMENSIONS Leng.	Diam.	JAN-R-93	POWER RATING (watts) JAN.	Comm.	RESISTANCE Min. (ohms.)	Max. (meg.)
CAB	1/2	9/32	—	—	1/4	2.0	0.15
CAF	3/4	9/32	RB51B	1/4	1/2	1.0	0.40
CCD	3/4	3/8	RB51B	1/4	1/2	0.5	1.0

Successfully used in Armed Forces *most critical* applications

Scores of results have established the superiority and outstanding quality of RPC's new TYPE C PRECISION WIRE WOUND RESISTORS. These high quality units are designed to meet the stringent requirements of JAN-R-93.

Completely insulated precision resistors which may be soldered directly into circuits. Their sm ll size and light weight make them self-supporting. Ideal for aircraft applications where reduction in size and weight are vital.

Completely enclosed in rugged plastic of high insulation value. Windings are impregnated in special compound and protected against dust, salt spray, humidity and mechanical damage.

Winding form is of low loss steatite having extremely high insulating quality with low coefficient of expansion. Impervious to moisture.

Type C resistors are wound with specially tested low temperature coefficient alloys.

RPC's Type C resistors are being used by many of America's outstanding manufacturers. They are available in any amount with prompt delivery. Write for complete information.

SPECIALIZING IN THE MANUFACTURE OF QUALITY RESISTORS IN *ANY* AMOUNT

RESISTANCE PRODUCTS CO.

714 RACE ST. HARRISBURG, PA.

HIGH MEGOHM, HIGH VOLTAGE, HIGH FREQUENCY, WIRE WOUND PRECISION

Stupakoff

Save space and weight
Speed Assembly
Reduce Costs
Minimize Assembly errors

Soldered connections are reduced by 25% to 80%, assemblies are lighter and more compact, your production time is reduced and better products are made when Stupakoff Printed Circuits are used. These sturdy, compact, accurately produced units combine resistors and capacitors of precision values, in circuits designed in accordance with the requirements of individual applications. One Stupakoff Printed Circuit will replace many individual components, with consequent simplification of the assembly and reduced costs.

Send for Bulletin →

Contains complete specifications of a number of typical standard circuits and detailed information on the design and construction of Stupakoff Printed Circuits. *Ask for Bulletin 1151.*

STUPAKOFF *Products for Electrical and Electronic Applications*

ASSEMBLIES—Metallized ceramic induction coils and shafts; metallized plates for fixed rigid assemblies; ceramic trimmer condensers.

CERAMICS—Precision-made ceramic products for electrical and electronic applications, all voltages, frequencies and temperatures.

RESISTOR CERAMICS—Used for temperature indicating or measuring equipment, for infra-red light source and for heating elements. Complete with terminals, in the form of rods, tubes, discs, bars, rings, etc.

CERAMIC DIELECTRICS—For by-pass, lead-through, blocking, stand-off and trimmer applications. Temperature compensating Ceramic Dielectrics and high K materials. Tubes, discs and special shapes, plain or silvered.

STUPALITH—Will withstand extreme thermal shock. May be made to have zero, low-positive or negative expansivities. Safely used at temperatures up to 2400° F.

SEALS, KOVAR-GLASS—Terminals, Lead-ins; Stand-offs—for hermetically sealing and mechanical construction in radio, television, electronic and electrical apparatus. Single or multiple terminal units, in a wide variety of sizes and ratings.

KOVAR METAL—The ideal alloy for sealing to hard glass. Used for making hermetic attachments. Available as rod, wire, sheet, foil—or as cups, eyelets and other shapes.

STUPAKOFF CERAMIC & MFG. CO., Latrobe, Pennsylvania

J.C. Hammarlund has the capacitor to fit your need
Jack

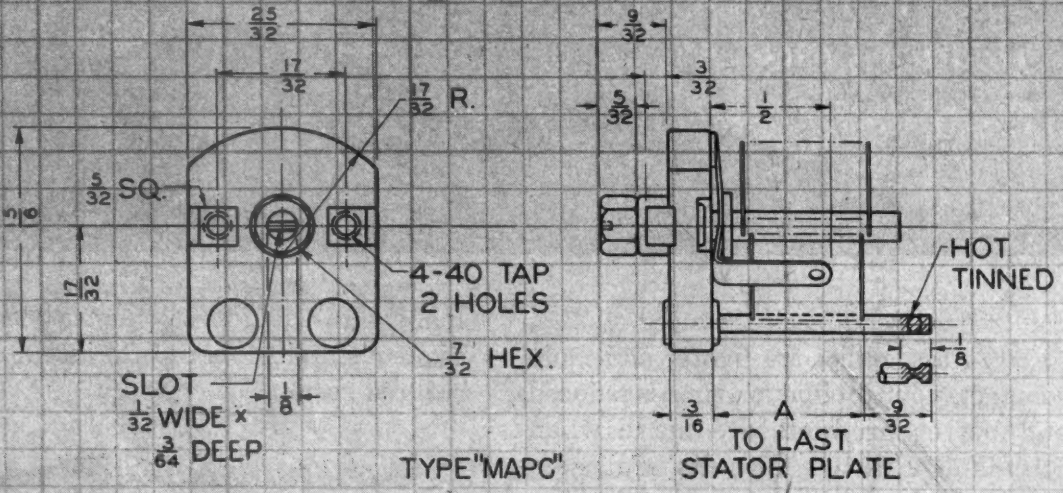

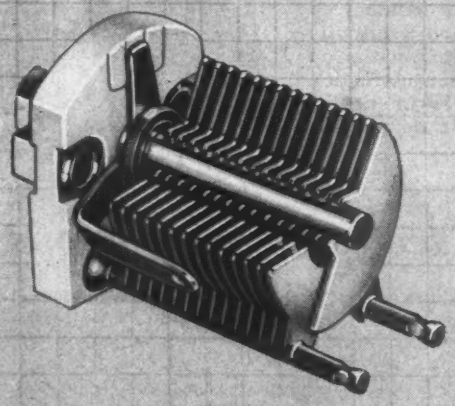

A Complete Line To Assist You!

This trimmer capacitor, the "MAPC", exemplifies Hammarlund's continuing efforts to meet the demand for smaller dependable components. A scaled-down version of the popular "APC", originated by Hammarlund more than 20 years ago, it has everything reduced except the quality and performance characteristics.

The Hammarlund *complete-line* of variable capacitors, carried by carefully chosen distributors from coast-to-coast, makes it possible for you to pre-select a capacitor that meets all your requirements of construction and operation.

Write today for the 1952 Capacitor Catalog

HAMMARLUND

HAMMARLUND MANUFACTURING COMPANY, INC.
460 WEST 34th STREET • NEW YORK 1, N. Y.

...has everything you need for PRINTED CIRCUITS

First to provide Tubes and Transistors that are correctly designed for quick, efficient printed circuit assembly. For the ultimate in portable performance, combine Raytheon's high-efficiency, filamentary Subminiature Tubes with Raytheon's Junction Transistors.

Subminiatures	Filament Volts	Filament Ma.	Plate Volts	Screen Volts	Grid Volts	Plate Ma.	Screen Ma.	Mutual Cond. Umhos.	Voltage Gain	Plate Resis. Meg.
1AG4 Output Pentode	1.25	40	41.4	41.4	-3.6	2.4	0.6	1000	35†	0.18
1AH4 RF Pentode	1.25	40	45.	45.	0	0.75	0.2	750		1.5
1AJ5 Diode-Pentode	1.25	40	45.	45.	0	1.0	0.3	425	50	0.3
1V6* Mixer-Pentode	1.25	40	45.	45.	0	0.4	0.15	200**		1.0
1V6* Osc.-Triode			45.	—	Rg = 1 meg.	0.4	—	550		
1AK4 RF Pentode	1.25	20	45.	45.	0	0.75	0.2	750		1.5
1AK5 Diode-Pentode	1.25	20	45.	45.	5 meg.	0.5	0.2	280	40	0.4

†Power Output — milliwatts **Conversion Conductance

***Type 1V6 is a high performance, low battery drain converter. Note the comparison with 1R5 using 45 volt supply.**

	1V6	1R5
Total Cathode Current (ua)	960	2750
Conversion Conductance (umhos)	200	235
Plate Resistance (megohms)	1.0	0.6
Conversion Gain (load = 175K)	30	32
Equiv. Noise Resistance (ohms)	70K	180K

PNP JUNCTION TRANSISTORS
(Average Characteristics at 30° C)

	CK721	CK722
Collector Voltage (volts)	-1.5	-1.5
Collector Current (ma.)	-0.5	-0.5
Base Current* (ua.)	-6	-20
Current Amplification Factor*	40	12
Power Gain* (db)	38	30
Noise Factor* (1,000 cycles) (db)	22	22

*Grounded Emitter connection

RAYTHEON

RAYTHEON MANUFACTURING COMPANY

Receiving Tube Division — for application information call

Newton, Mass. Bigelow 4-7500 • Chicago, Ill. NAtional 2-2770 • New York, N.Y. WHitehall 3-4980 • Los Angeles, Calif. Richmond 7-2524

RAYTHEON MAKES ALL THESE:

RELIABLE SUBMINIATURE AND MINIATURE TUBES • GERMANIUM DIODES AND TRANSISTORS • MICROWAVE TUBES • RECEIVING AND PICTURE TUBES

For high-fidelity, true-tone reproduction of voice and music, these small and rugged microphones are destined to be the favorites of leading recording artists . . . singers—instrumentalists—and bands everywhere.

● **These microphones** will outperform all other "slender" microphones—because of their advanced acoustical, electrical, and mechanical features. Both models provide a bi-directional pickup pattern—permitting greater performer freedom (performers can stand at a 73% greater distance from the microphone!) The "300" and "315" will pick up voice and music from front and back—yet discriminate against unwanted noises from the sides. They reduce reverberation and the pickup of distracting random noises by 66%!

SHURE

Shure Patents Pending

SHURE BROTHERS, Inc. ★ MANUFACTURERS of MICROPHONES and ACOUSTIC DEVICES

225 West Huron Street, Chicago 10, Illinois • Cable Address: SHUREMICRO

TELE-TIPS

(Continued from page 49)

SENSE APPEAL—Predictions made years before "Cinerama" foresaw the development of three-dimensional TV and the "smellies"—devices which are now patented inventions. During moments of idle speculation, the imaginative have been focusing their attention on the subtle implications and design problems of the ultimate form of communication which will appeal to all the five senses. As an example of this trend of thought, Aldous Huxley's futuristic book *Brave New World* described an entertainment medium called the "feelies." An excerpt states, " 'Going to the Feelies this evening, Henry?' enquired the Assistant Predestinator. 'I hear the new one at the Alhambra is first-rate. There's a love scene on a bearskin rug; they say it's marvellous. Every hair of the bear reproduced. The most amazing tactual effects.' "

PROGNOSTICATION has been further presented in Al Capp's comic strip *Li'l Abner*. A system called "feelavision" showed little solid men jumping out of the receiver. However, not all of these concepts lie within the realm of humorous writing. One inventor has actually made a drawing board design of a "telebiovision" system which boasts an odor organ, smoke unit, vibrator arrangement for shaking the living-room floor, heat emitter, and to make the sense appeal complete, a multi-metal grid which creates the illusion of different tastes when pressed against the tongue!

ON GETTING AHEAD—"You Don't Have To Be Brilliant To Make A Greater Success Of Your Life," says Sam Himmell, practical philosopher who occasionally visits TELE-TECH's offices. "You May Not Always Be Better Than Others, But You Can Always Be Better Than Yourself . . . Every Artist Was First An Amateur, And the Most Difficult Part Of Getting To The Top Of The Ladder Is Getting Thru The Crowd At The Bottom . . . It Takes Just A Little More Than The Ordinary To Move Out Ahead Of The Herd, And If You Cannot Overwhelm Them With Your Quality, Overwhelm Them With Your Quantity . . . The Faster You Go, The More Chance There Is Of Stubbing Your Toe, But The More Chance You Have Of Getting Somewhere." . . . *Said Ovid, The Philosopher,* in the Year 1400, "Chance Is Powerful. Let Your Hook Always Be Cast. In The Pool Where You Least Expect It, Will Be a Fish."

CBS-HYTRON TRANSISTORS

CBS-HYTRON
PT-2A



ACTUAL SIZE



CBS-HYTRON
PT-2S

- Moisture-resistant
- Plug-in or solder-in
- Sturdy triangular basing
- Polarized base connections
- Auto-electronically formed
- Thoroughly stabilized
- Operate up to 55° C

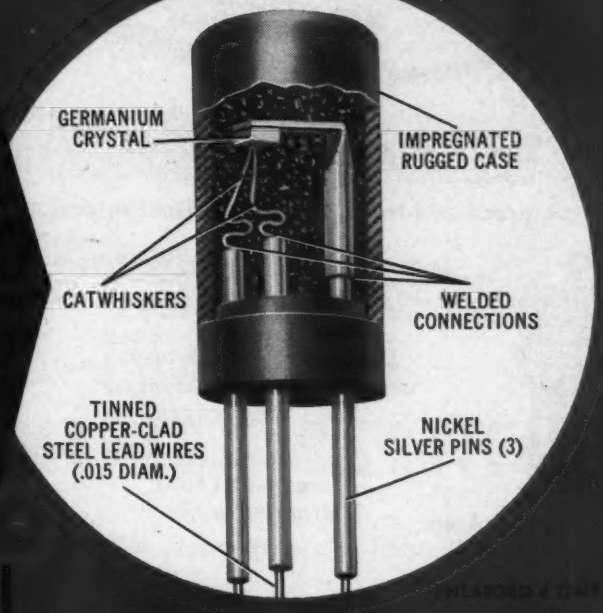

AND YOU CAN BUY THEM NOW!

Already a major producer of germanium diodes, CBS-Hytron now offers you prompt delivery of transistors: Point-contact CBS-Hytron PT-2A (for amplifying) and PT-2S (for switching). Both have stable characteristics and are guaranteed moisture-resistant. Note flexible leads welded to base pins. You may solder flexible leads into circuit. Or snip them to use stiff base pins in CBS-Hytron type T-2 socket.

Triangular arrangement of base pins is stronger . . . avoids bent pins. Easy-to-remember basing layout simulates basing symbol (see diagram). Polarization makes socket connections foolproof. You are assured of uniformly optimum characteristics by electronic control of pulse forming. Thorough aging achieves maximum stability. You may operate these transistors up to 55°C. And you can order both CBS-Hytron PT-2A and PT-2S for immediate delivery.

MECHANICAL FEATURES

1. Single-ended construction gives maximum mechanical stability.
2. Rugged triangular basing design resists shock and vibration.
3. Dual-purpose connections permit use of flexible leads or stiff plug-in base pins.
4. Direct soldering of germanium wafer to base support guarantees positive contact, avoids flaking.
5. Glass-filled plastic case and high-temperature impregnating wax assure moisture-resistant, trouble-free operation.

BASING AND SOCKET



Transistor Symbol — Basing Diagram (bottom view) — CBS-Hytron T-2 socket

Note similarity of pin layout to that of transistor symbol. CBS-Hytron type T-2 transistor socket features groove to guide pins into socket. Also anti-burn-out design to insure that base connection of transistor will always be made first.



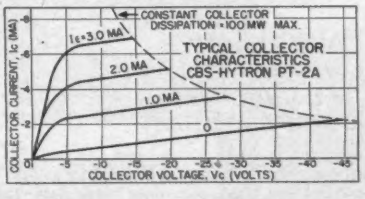



CBS HYTRON

MANUFACTURERS OF RECEIVING TUBES SINCE 1921
HYTRON RADIO AND ELECTRONICS CO.
A Division of Columbia Broadcasting System, Inc.
Main Office: Danvers, Massachusetts

WRITE FOR DATA. Complete free data on CBS-Hytron PT-2A and PT-2S . . . and the T-2 socket . . . are yours for the asking.

RECEIVING . . . TRANSMITTING . . . SPECIAL-PURPOSE AND TV PICTURE TUBES • GERMANIUM DIODES AND TRANSISTORS

SUB-MINIATURE
PILOT LIGHTS
Approved for AIRCRAFT
AND IMPROVED IN IMPORTANT DETAILS

DIALCO

SUB-MINIATURE INDICATOR ASSEMBLIES

A great aid to your miniaturization program

MOUNT IN 15/32" HOLE
ALL LENS COLORS

Easy lamp replacement with any midget flanged base lamp types

Complete blackout or semi-blackout dimmer types

NON-DIMMING
No. 8-1930-621

MECHANICAL DIMMER
No. 11-1930-621

THESE ASSEMBLIES LOGICALLY REPLACE LAMPS NO. 319, 320, and 321

REPLACE WITH THIS

NOT THIS

OR THIS

PLASTIC PLATE (EDGE) LIGHT ASSEMBLIES

AIR FORCE and BUREAU of AERONAUTICS
MIL-L-7806 DRAWING MS-25010

DIALCO *No. TT-51* (Red filter-black top)
. . . or, *No. TT-51A*, complete with No. 327 Lamp

ALSO MADE
with other filter colors and with *light-emitting top* (for indication)

ALL OF THE ASSEMBLIES ILLUSTRATED ACCOMMODATE LAMPS NOS. 327, 328, 330, and 331.

ANY ASSEMBLY AVAILABLE COMPLETE WITH LAMP

SAMPLES ON REQUEST—NO CHARGE

Foremost Manufacturer of Pilot Lights

DIALIGHT CORPORATION

60 STEWART AVENUE, BROOKLYN 37, N. Y. HYACINTH 7-7600

© 1952

LETTERS . . .

Q-Meters

Editors, TELE-TECH

The letter printed on page 48 of your February issue regarding Q-Meter states that the originator of the method is not known. While I cannot answer that question for sure, I believe that the first reference was published in the magazine *Electronic Industries* on page 88, July, 1943. The latter report was published several years before Q-Meters were provided with inductance scales.

While I am about it, the reference to small diameter necks on cathode ray tubes that recently appeared in your columns was of interest. I had such a tube built in 1931. This tube was pictured in the magazine *Instruments*, as Fig. 8 in my article of October, 1935. Tubes with small necks were in common use well before 1917, however, and in the German literature especially many of these tubes were described.

RALPH R. BATCHER
Chief Engineer, RTMA
489 Fifth Ave.,
New York 17, N. Y.

Trans-Atlantic TV in 1930!

Editors, TELE-TECH:

I was most interested to read the discussion on "Transatlantic Television" in your recent issue.

You may be interested to hear that on September 17, 1930, I received a TV programme direct from the General Electric station at Schenectady, N.Y. and I have in my possession a cable sent to me by G.E. which fully confirms my reception. This was undoubtedly the first time that American television crossed the Atlantic and to the best of my knowledge it has not been repeated.

I am bound to admit, however, that the frequency used for this three-days test transmission to Germany (where it was not received, I understand) was favourable for trans-Atlantic communication—it was around 15 megacycles. (1930 was very early in the comparatively short history of television for such long distance reception.) The Jenkins Co. wrote to me soon afterwards and said they were calling me on TV specially on Wednesdays, but as far as I remember this was on approximately 145 metres, which was hardly suitable for the occasion.

I am convinced that a permanent transAtlantic relay circuit whether by the NARCOM Plan, ionospheric scatter or any other method would be of inestimable value to our two countries.

—DOUGLAS WALTERS,
Manager Radio Laboratory.
186, High Holborn,
London WCI, England

DIFFUSED JUNCTION GERMANIUM RECTIFIERS

ABSOLUTE MAXIMUM RATINGS • T-55°C • RESISTIVE LOAD				
DIFFUSED JUNCTION RECTIFIER	4JA1A1	4JA1A2	4JA1A3	4JA2A4
PEAK INVERSE VOLTAGE* (volts)	100	200	300	400
PEAK FORWARD CURRENT (amps)	0.47	0.31	0.25	1.57
D.C. OUTPUT CURRENT* (Ma)	150	100	75	500
D.C. SURGE CURRENT (amps)	25	25	25	25
FULL LOAD VOLTAGE DROP (volts peak)	0.5v	0.5v	0.5v	0.7v
FORWARD RESISTANCE AT FULL LOAD (ohms)	1.1	1.5	1.9	0.5
CONTINUOUS REVERSE WORKING VOLTAGE (volts D.C.)	30	65	100	185
FREQUENCY OF OPERATION (kc)	50	50	50	50
STORAGE TEMPERATURE (°C)	85	85	85	85

*Typical absolute maximum ratings. For other combinations refer to Fig. 1.

HERMETICALLY SEALED against deteriorating elements. Glass-to-metal seals throughout.

MINIATURE SIZE to facilitate use in all electronic equipments, yet heat losses are dissipated efficiently.

REDESIGNED to meet all military humidity tests and shock and vibration requirements.

HIGH OUTPUT VOLTAGE and improved back current characteristics.

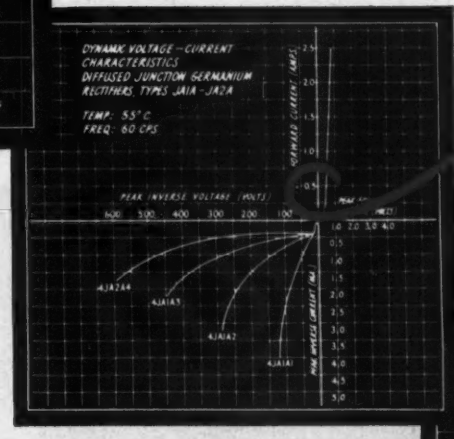

Note: This is only one ohm!

NEWS FROM OUR ADVANCED DEVELOPMENT LABORATORIES

Developmental germanium rectifiers for the KW range have been made so efficient that the copper lead connections must be larger in cross sectional area than the diffused junction itself.

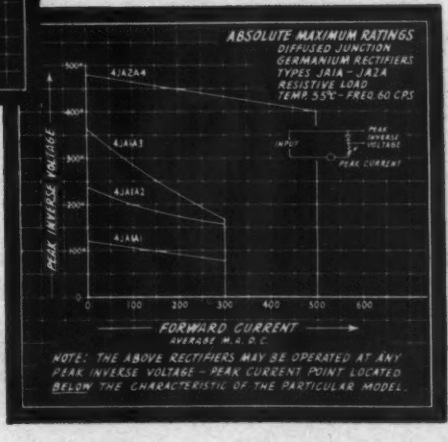

Send for complete G-E Diffused Junction Rectifier Information: General Electric Company, Section 4833, Electronics Park, Syracuse, New York.

1878 75 1953 YEARS OF ELECTRICAL PROGRESS

GENERAL ELECTRIC

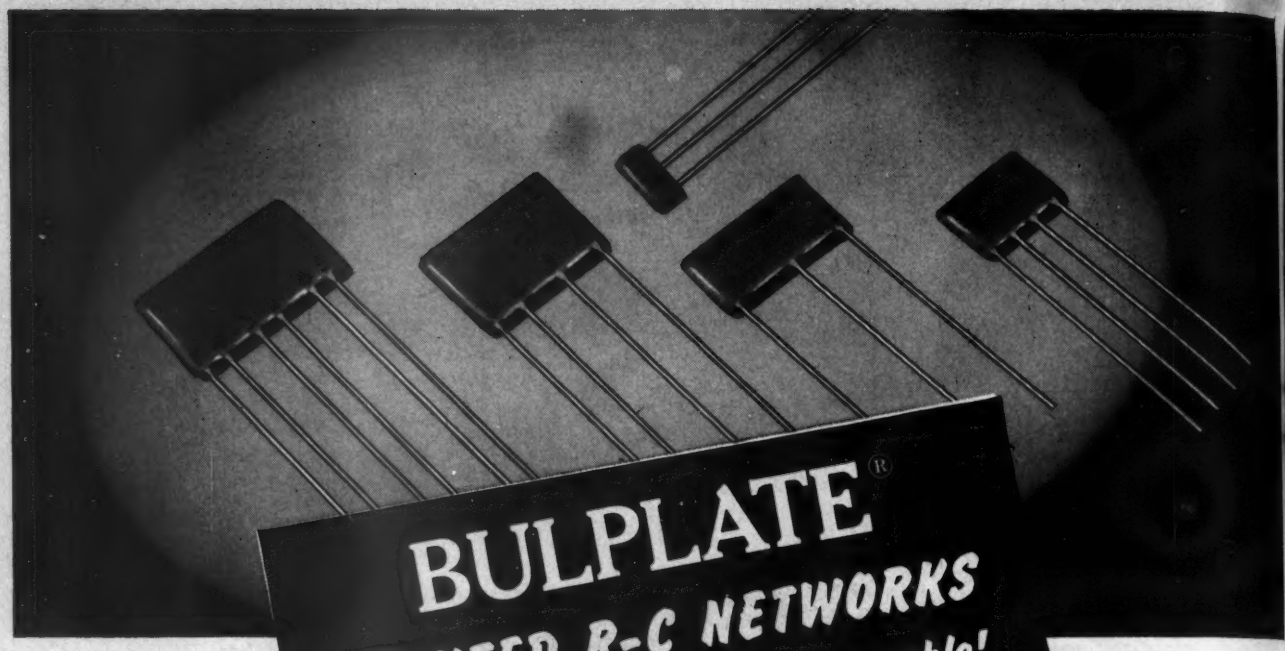

BULPLATE®

PRINTED R-C NETWORKS

Can save you money, time, trouble!

Printed circuits like those shown here offer important advantages in radio and TV production—fewer parts to purchase, inspect, handle, and stock; fewer soldering operations and quicker assembly with minimal wiring errors; faster and easier inspection; greater compactness; and lighter weight. And usually they cost less than the individual capacitors and resistors they replace!

BULPLATE Printed Circuits are a logical outgrowth of Sprague-Herlec BULPLATE Multiple Ceramic Capacitors, first to use the active dielectric as a supporting medium for printed wiring. The printed resistor elements of these plates have proved to be highly stable, another important Sprague contribution.

Thousands of BULPLATES are now in use in radio, television, and military electronics. Are you overlooking a winning bet for your production?

And remember—if you have a special problem on a network which must perform a certain circuit function, Sprague will design it for you.

Write today for Engineering Bulletin 650 to Sprague Electric Company, 233 Marshall Street, North Adams, Mass.

TYPICAL RADIO AND TV BULPLATE CIRCUITS

Diode Filter | Triode Coupling | Vertical Integrator | Pentode Coupling | I-F Filter | Audio Output

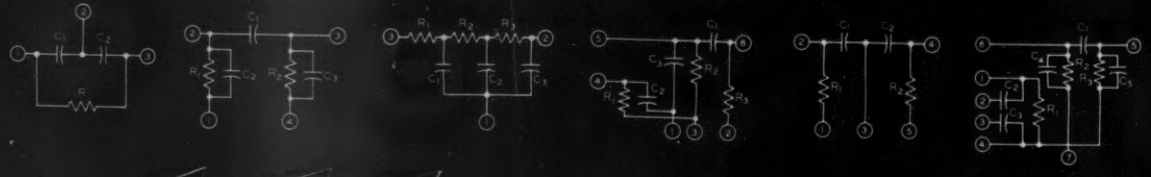

SPRAGUE

WORLD'S LARGEST CAPACITOR MANUFACTURER

See us at the I.R.E. Show—Booths 1-410 & 1-412

TELE-TECH
& ELECTRONIC INDUSTRIES—RADIO-TELEVISION

O. H. CALDWELL, Editorial Director ★ M. CLEMENTS, Publisher ★ 480 Lexington Ave., New York (17) N. Y.

THE NEED FOR Advance Engineering Planning

The general approach in dealing with radio communication problems has undergone considerable transition in the past decade or more. Before that the engineer was concerned more with equipment evolution than with advance methods planning.

When the pressure of demand faced the infant industry there was little time for the fundamental niceties of research and also litttle financial encouragement therefor, so that effort gravitated towards the assembling of specific apparatus. The builders of growing enterprises exhibited impatience towards the efforts of the abstract technician and did not seriously visualize the future or try to understand the actual mechanics of how the results they were getting were being achieved or how they could be improved through the development of fundamentals. In the mad rush of making this instrumentality useful to mankind the demand for consistent practical technical planning, which we call engineeering, became somewhat smothered.

Systems and Methods

Today much more emphasis is given to system and methods aspects. The technique of equipment and gadget production is currently such that the methods engineer can generally get the apparatus made up that he needs to fit a planned system instead of being confronted with a system made up of such building blocks as could be picked up on the market. This is particularly true for those higher frequency bands that have come into use in recent years where impediments because of previously long established services with vested rights were minor or absent. The field in which many engineers work is susceptible to this approach, and more and more engineers will develop interest in methods and utilization planning. Business men and administrators have acquired a greater awareness of this trend and are reaching the viewpoint that technical solutions to meet specific objectives are just a matter of time and effort.

Fullest Use of Facilities

Another transition can be discerned. Before some of these frequency bands became uniformly overcrowded it was largely taken for granted that, when the need arose, more use could be developed by seeking out those hidden frequency spaces which would be disclosed by applying improved technical processes such as better frequency stability, confining radiation bands to those widths essential for passing the required intelligence, etc. Being uninterested in salesmanship as such and not pressed by an urgent demand, engineers did not aggressively publicize at the outset how future growth and prosperity could be promoted by a universal understanding that technical attainments must be used to their fullest. Recent convention addresses give testimony that the importance of this has become paramount.

And now for the future. The trends that I have pointed out will continue. The ability to create technical means to meet specified objectives will improve. The engineer will concern himself more and more with the end product of the communication service. This will put him in closer touch with the economic and social phases of human endeavor and broaden his area of interest and operations. His training of using perceptive thought and critical planning combined with discipline and patience will clear ways to further accomplishments.

A guest editorial by Haraden Pratt, Telecommunications Advisor to the President of the United States, and Secretary IRE, adapted from his recent address to the Professional Group on Vehicular Communications, IRE.

RADARSCOPE

Revealing Important Advances Throughout the Spectrum of Radio, TV and Tele Communications

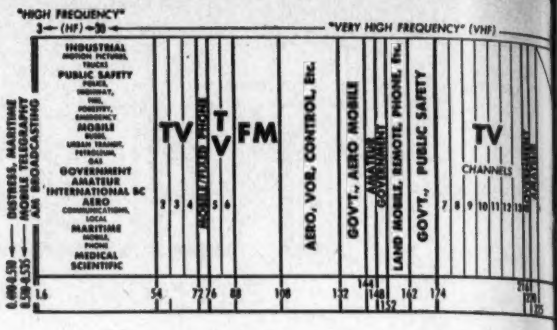

GOVERNMENT

IRAC—In these columns attention has frequently been called to the fact that the Washington Interdepartment Radio Advisory Committee has long actually controlled about one-half of the available radio spectrum, having first choice of all radio frequencies—with the FCC getting only the "left overs" for assignment to commercial, educational and public use. After two changes of name, IRAC still functions, but with a chairman (Lt. Col. W. M. Lauterbach), reporting to the Telecommunications Advisor to the President, and sharing his White House Extension offices. Representing the various departments IRAC's members now are: Air Force, J. D. Corley; State Dept., John S. Cross; Justice, M. W. Kuhrtz; Navy, Capt. T. P. Lowndes, USN; Interior, S. L. Windes; Army, Maj. E. R. Reynolds; Coast Guard, Capt. E. K. Rhodes; Civil Aeronautics, Lloyd H. Simson; Forest Service, E. C. Wagner. IRAC's executive secretary is C. W. Loeber, Room 2024, T-5 Building, 16th and Constitution Ave., N. W., Washington 25, D. C.

COLOR—TV

NTSC has now agreed on the technical characteristics of a new horizontal sync signal for the all-industry compatible color-TV system. Arrangements for field tests using the new signal are now being made. Upon successful completion of these tests, the system will be ready for presentation to the FCC,—probably in the Fall of this year. Uncertainty over the technical characteristics of the horizontal sync signal has been credited as a reason for the reluctance of some manufacturers to build experimental receivers. Now that this problem has been resolved even greater manufacturer participation is expected.

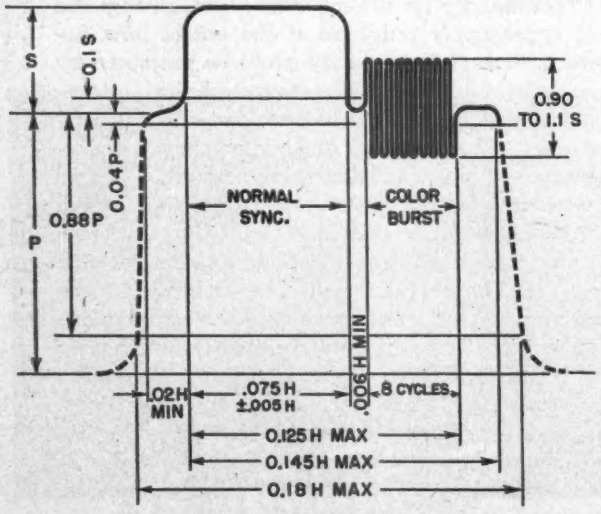

Diagram of the recently adopted NTSC compatible color-TV horizontal sync signal showing amplitude and time relationships. In the drawing P is pedestal, S is sync and H is time for one horizontal line. Agreement on this waveform now opens way for full field testing of NTSC color-Tv system, after which, probably in late fall, a formal presentation will be made to FCC.

INTERNATIONAL BROADCASTING

CROSS-MODULATION interaction studies in Australia and Europe are providing valuable theoretical information which may be used for measuring the magnetic field in the E-layer of the ionosphere. The presence of certain electric currents in the ionosphere has been postulated to account for numerous terrestrial magnetic variations. A very interesting secondary result of these investigations which concerns skyway reception is the observation that conditions due to this type of interference are present much more than is commonly supposed. However, our European observers state that ether conditions in Europe now preclude skyway reception. Apparently very few people there attempt to receive stations which are not within ground wave range due to the absence of clear channels for wide area coverage.

INTERFERENCE

SPURIOUS EMISSIONS—Commending the Joint Technical Advisory Committee on its admirable report on "Radio Spectrum Conservation," the FCC now asks JTAC for further study of "spurious radiation." Comments Chairman Walker:

"In providing for the maximum use of the radio spectrum, the Commission has been confronted with the necessity for controlling the radiation of radio frequency energy which does not make constructive use of the spectrum. Such radiation results in interference which is not only wastful but may be also dangerous where the safety radio services are involved. The spurious radiation from transmitters, receivers and other equipment, coupled with the inadequate selectivity of receivers, presents a problem of spectrum engineering which has greatly increased in importance and difficulty in recent years.

"With manual operation and aural reception, interference is rapidly noted and prompt corrective measures are generally feasible. However, with the trend toward automatic operation, interference cannot readily be detected and remedial measures are not easy. The wider bandwidths used in many new applications increases the vulnerability to interference. The situation is further aggravated by the development of high powered transmitters and the parallel development of receivers having low inherent noise, and the tendency towards the geographical concentration of many types of services."

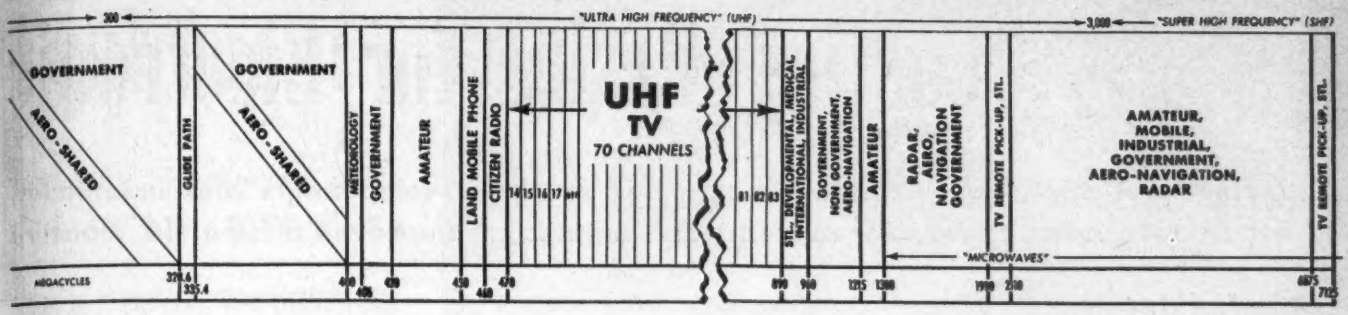

AUDIO

SEVERAL LARGER TV AND RADIO set manufacturers are reported as now looking to the high fidelity market with considerable interest. The annual "Hi-Fi" business volume has been increasing steadily in recent years and these manufacturers are weighing thoughts of perhaps including "Hi-Fi" models in their receiver lines. The audio equipment manufacturers are noticeably concerned over this possibility. They feel that "Hi-Fi" on a mass production basis would be mediocre at best from a performance standpoint, that it would force down unit selling prices, that it would cause a lowering of quality standards throughout the industry to meet competitive prices and that any lowering of quality standards might in turn sour the public on the purchase of "Hi-Fi" equipment.

TEST EQUIPMENT

STANDARDIZE INSTRUMENT CONTROLS? The cathode ray working group of AIEE is reported to be considering the establishment of standards for the placement of controls on cathode ray oscilloscopes. This same thought might also be advantageously employed on other types of test equipment. The idea certainly has considerable merit when one considers the time lost by engineers now in having to familiarize themselves with the control operation of each item of test equipment that they plan to use. Clutch and brake pedals have standard locations in all automobiles and learning to drive one enables you to drive all. Standardizing the control locations on various test equipment items would be likewise effective.

ELECTRONIC PRINTING

PHOTOELECTRIC TYPESETTING—What electronic tubes have done for other forms of communication, may now revolutionize typesetting and printing. In the newest Photon system, the keyboard characters are "memorized" electronically, as in a computer circuit, and are then expanded or "justified" to fill the line. This completed, the characters are printed on film from a whirling disc, by light flashes controlled at the proper instant. A simple disc suffices for any size of type of the same font, by varying the lens position. Speeds up to 12,000 characters per hour, have been obtained,—three times the operating speed of conventional typesetting machines. The finished composition is a film negative from which the printed page will be reproduced.

MANPOWER

WARNING!—"The manpower situation is becoming so critical that before long contracts will either have to be extended or cancelled," observed Maynard M. Boring, personnel manager of General Electric, at a recent armed forces conference. He attributed the reason for this precarious position to the shortage of engineering graduates—a shortage which is being made increasingly critical by the growing drain of the Reserve Officers Training Corps. The percent of engineering students in the ROTC has been increasing although total enrollment has been falling. In 1952, 16% of 29,000 engineers graduated from 196 colleges were in the ROTC. They have been called to active duty for two to three years. In 1953, 21,000 graduates will include 22% ROTC. The figure will rise to 46% of 17,500 in 1954, and 52% of 21,000 in 1955. The preliminary count for 1956 is 65% of 25,000 graduates. Under normal conditions a substantial number drop from ROTC at the end of the sophomore year. Today this drop apparently is only 3%. Considering that a shortage of 40,000 engineers exists, it would be a good idea for the armed services to ease up and permit more technical men to enter industry.

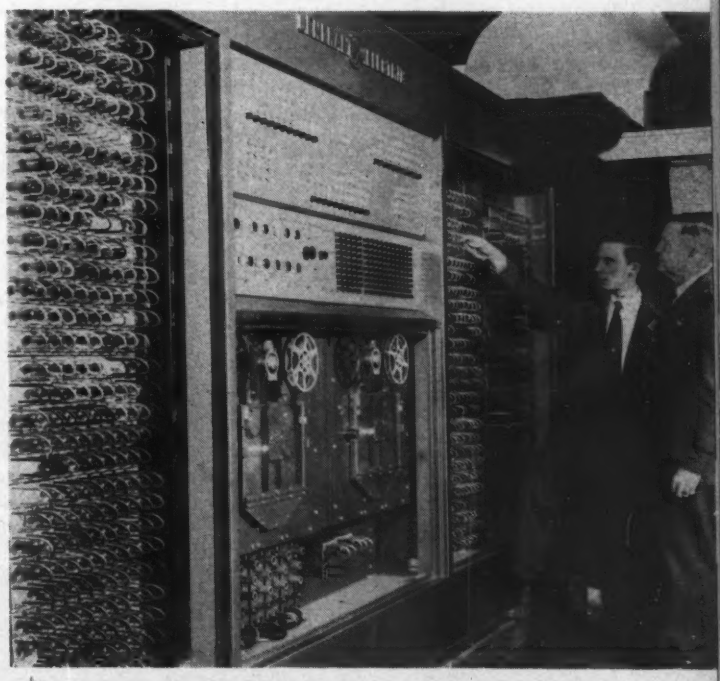

Brig. Gen. L. I. Davis, armament director at Baltimore Air Force Air Research & Development Command, and B. Geyer, GE engineer, inspect OARAC, a new digital computer for the Flight Research Lab., Wright Air Development Center, Dayton, Ohio. Center section contains operations panel and high speed input and output tape mechanisms. 1400 tubes and 7000 diodes are employed by equipment. Additional technical details are described elsewhere in this issue.

Casting Resins for Electronic

Methods of applying embedding techniques to circuit components and assemblies, for aircraft. Advantages over conventional coatings are improved dissipation, moisture

By WILLIAM R. CUMING
Emerson & Cuming, Inc.
869 Washington St., Canton, Mass.

THE use of casting resins and embedment techniques as applied to electronic equipment has increased greatly during the past five years. The early use of these materials was confined to the embedment of complete circuit assemblies. The use today is of much larger scope. Casting resins, or, more properly, formulations based on casting resins, are used as coatings, impregnants and even molding compositions. These resins are used in processing resistors, capacitors and transformers, as individual circuit elements and even in the construction of electronic hardware.

Advantages & Limitations

It will be worthwhile briefly to review some of the advantages and limitations in the use of casting resins. These refer specifically to the embedment of electronic circuits, where the circuit is placed in a mold and the resin polymerized around it to produce a completely solid structure.

Hermetic Sealings: It is well known that all plastic materials will absorb and transmit moisture. For the required degree of protection, two factors must be considered: (a) the moisture absorption of the resin, and (b) the moisture transmission. Moisture absorption by a resin results in impairment of its electrical properties. Insulation resistance decreases, dielectric constant increases, and dissipation factor increases.

Moisture transmission through the embedment compound will, of course, have a direct effect on the circuit elements. Difficulties in this respect can almost always be corrected by a small increase in thickness of the embedment compound.

It is good practice to test a blank, that is, a casting of the same physical characteristics of the embedded unit, under humidity conditions to determine what the moisture absorption effects will be. For unfilled polyester type resins, ⅛-in. has been found adequate for a moisture seal on most sensitive components. For example, a precision mica capacitor which was very sensitive to high humidity was embedded in a block of plastic so that the coating had a thickness of approximately ⅛ inch. The plastic used was a polyester resin of the rigid type with a moisture transmission coefficient of 150g/100 sq. m./hr. (for 1 mil film) and a moisture absorption of 0.2% in 24 hours at 25° C. After 1,000 hours in 100% relative humidity, the capacitor had not increased in capacitance or dissipation factor.

Problem of Moisture

When embedding circuits or components, there is always the problem of moisture tunneling into the embedment at the interface between the plastic material and the metal lead. It is, therefore, good practice to use solid bare single conductor leads at the entry point. It is also good practice to locate leads so that the plastic material in polymerization shrinks on to the surface at which a seal is desired. This difficulty can usually be overcome by the use of a priming coat of good adhesion. Small molded connectors are sometimes made a part of the casting and are effective in prevention of moisture tunneling.

Ruggedization and Shockproofing: Delicate electronic assemblies are made rigid solid structures through casting techniques with no opportunity for relative movement of components. By controlling the damping characteristic of the cured resin, it is possible to control transmission of vibrations.

Acceleration tests made on embedded circuits for guided missile use have indicated that there is no damage to the embedment resin or to properly embedded components. Difficulties are more likely to occur within vacuum tubes or other circuit elements.

Elimination of Mountings: Mountings, terminal strips and other hardware are minimized or eliminated in embedded circuits. Often bare point-to-point wiring may be used for rapid circuit assembly. Insulation is adequately supplied by the resin.

Miniaturization: Three dimensional packing of components permits miniaturization. For example, on some well designed embedments it has been possible to utilize over 60% of the volume of the embedment in components.

There are a number of limitations on the use of casting resins to embed circuits. A few of the more important are presented.

Repair: The repair of embedded circuits is very difficult and in most cases impractical. The use of solvents to dissolve the resin is time-consuming and often results in destroying circuit elements. It is possible, however, to recover certain valuable components by this method. Drilling into an embedment, making the repair and recasting is sometimes used, but is a rather expensive procedure. Moreover, this requires the use of a transparent casting resin. One approach is to embed assemblies as units which are to be discarded if trouble appears.

Heat Dissipation: The dissipation of heat from within an embedded circuit is a problem which must be considered carefully during physical design phases. Tests on subminiature vacuum tubes, operating under rated conditions, indicate that the surface temperature of a tube embedded in a one-inch cube of polyester resin will be approximately 85° C above ambient, whereas the surface of the tube in air under free convection conditions will be 70° C above ambient. The thermal conductivity of the resin in this instance was 1.5 BTU/ft²/hr/°F/in.

Surface Temperature

Surface temperature of the embedded tube increased at the rate of 30° C per watt of dissipation. The surface of a ½ watt carbon resistor at rated dissipation was 30° C above ambient, whereas the surface temperature of a 1 watt resistor at ½ watt dissipation was 23° C above ambient. Both were embedded in the center of a one-inch cube. This indicates some advantage in the use of over-rated heat dissipation components.

Under conditions where components are closely packed and where assemblies are in confined spaces so that there is no appreciable air flow,

Equipment

including shockproof units and corona properties

circuits run at approximately the same temperature whether embedded or not. This is due, of course, to the poor heat transmission through still air.

Many components will operate at much higher temperatures within an embedment than they will in air. Two reasons for this are the elimination of attack by oxygen and the prevention of escape of volatile constituents.

There is, of course, an effect on circuit constants when an assembly is embedded. It is usually necessary, therefore, to make preliminary embedments of a circuit or component to determine what these effects are and to then take them into account on the final design.

In some instances it has been found desirable to allow for screw driver adjustment within an embedment. A small void is left, adjustment made, and the void is then filled.

Core of Embedment

A series of Q meter coils which ranged in frequency from 5 to 60 MC and in which the Q's were from 140 to 170 were embedded in a resin with a dissipation factor of approximately 2% and a dielectric constant of approximately 3.0. The winding mandrel for the coils was polystyrene. This material remained as the core of the embedment. It was found that embedment in a large mass of resin caused a 5% decrease in Q and an increase in distributed capacitance of the order of 1 μμf.

The embedment of precision components presents several problems. The embedment compound may have an effect on the material from which the component is constructed. This may be due to solvent action by the resin or pressure due to shrinkage on polymerization. The effect is not always reproducible to the degree required.

Weight addition due to potting equipment is a design consideration. The specific gravities of most casting resin compositions range from 1 to 1.5. When embedment is used on a physically well designed unitized assembly, weight is increased roughly

(*Continued on page* 168)

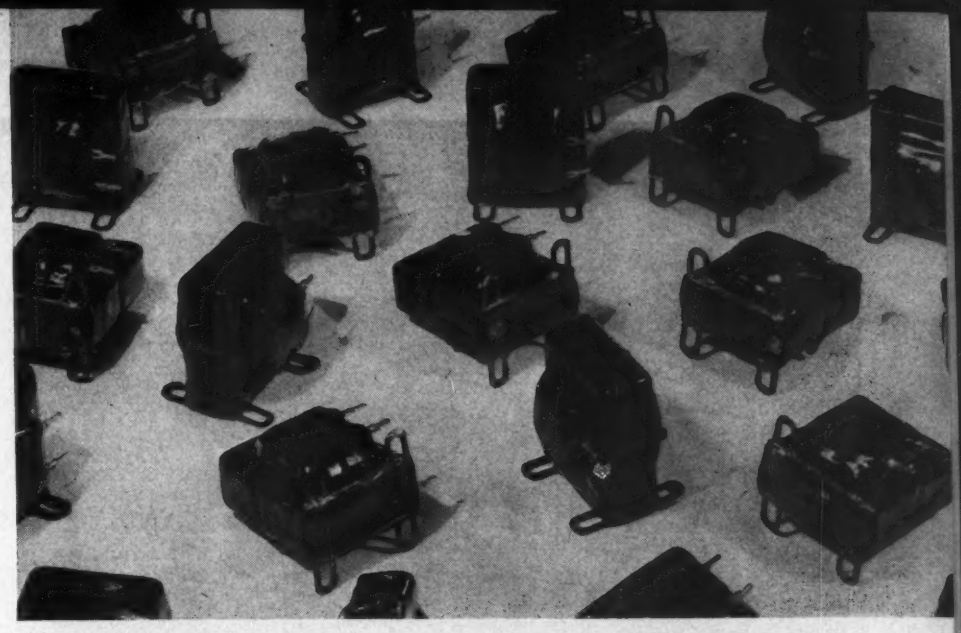

Fig 1: Dip-coated transformers show improved moisture sealing and heat dissipation properties

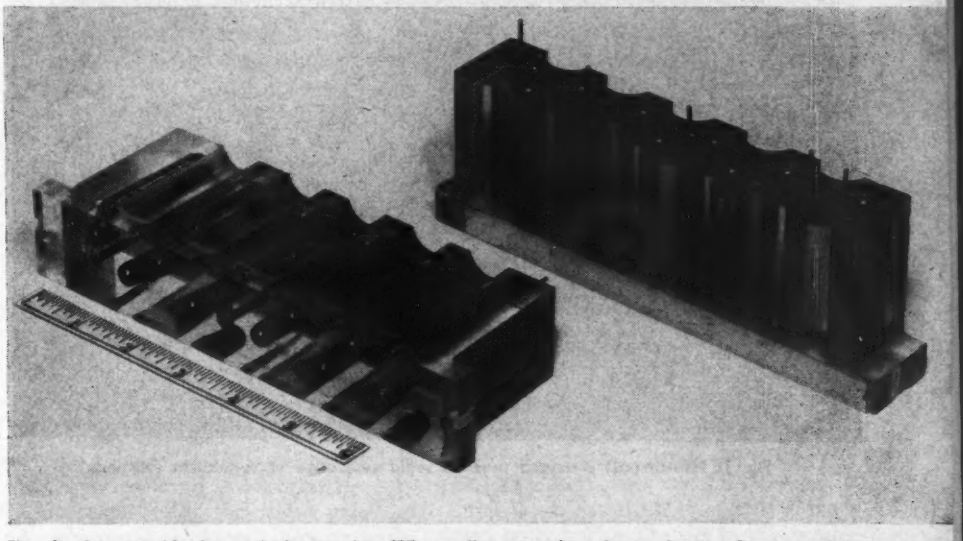

Fig. 2: Compact bleeder embedments for CRT supplies comprise eleven 4-meg, 2-watt resistors

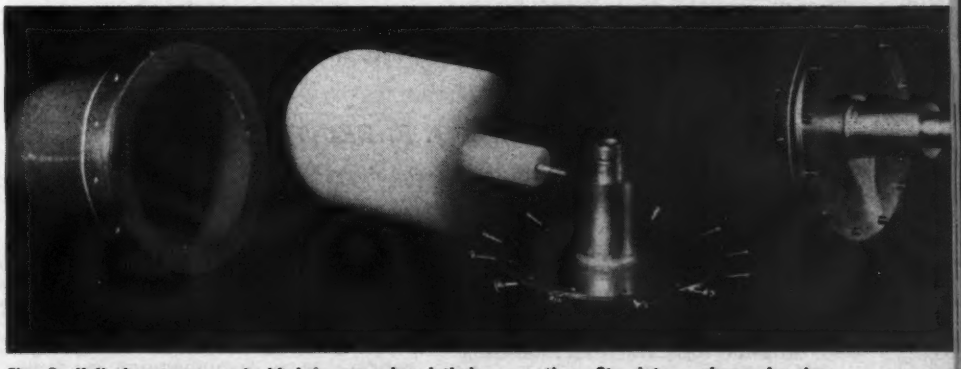

Fig. 3: Helical antenna embedded in rugged polythylene casting fits into radome housing

Fig. 4: Thermistor assemblies for measuring underwater temperatures are sealed against 300 psi

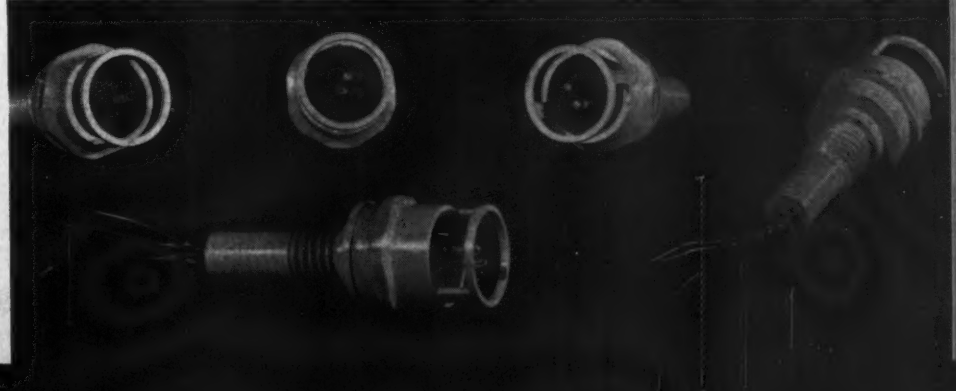

A Five-

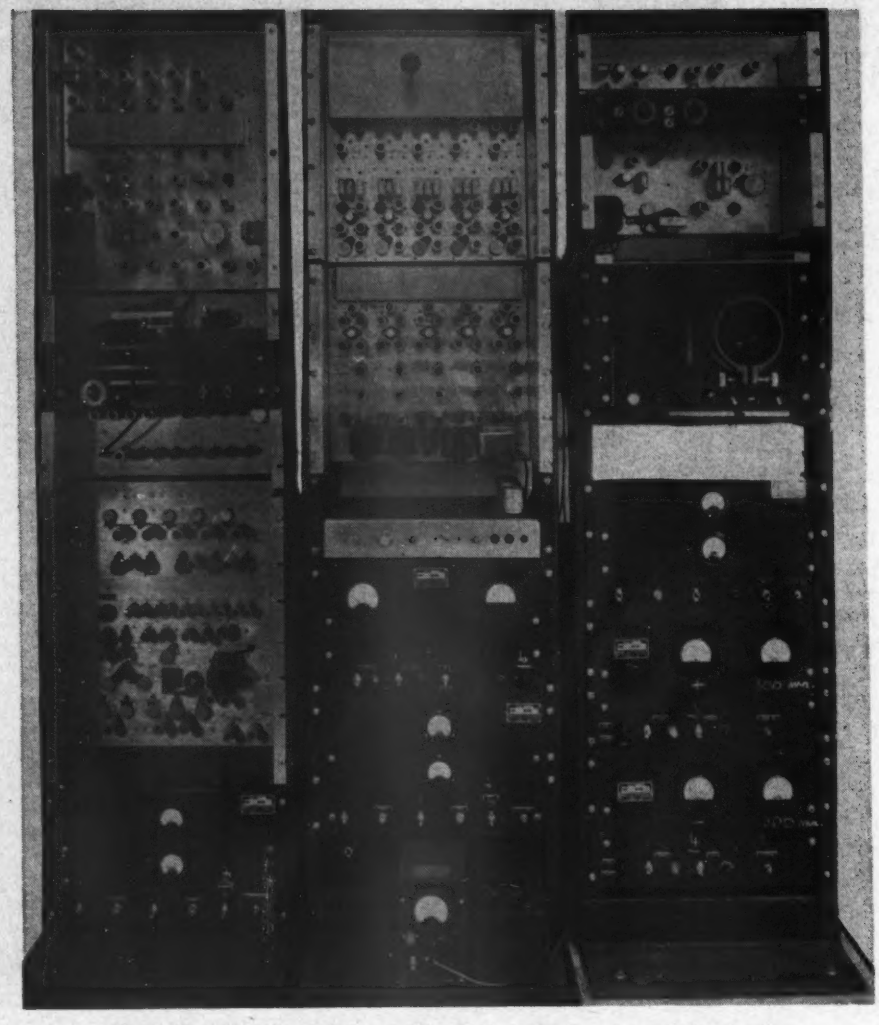

Fig. 1: Five-channel correlator provides rapid evaluation of correlation functions

Recently developed device extends application of statistical theory to communication problems by rapid simultaneous computation of five points of a correlation curve

By M. J. LEVIN & J. F. REINTJES

Massachusetts Institute of Technology, Cambridge, Mass.

THE application of statistical techniques and probability theory to the field of communications has provided electrical engineers with new and valuable tools for understanding and handling problems arising in this field. Of great importance to these techniques are the correlation functions of the time series involved in the problems under consideration. As is well known, the crosscorrelation function of $f_A(t)$ and $f_B(t)$ is defined as

$$\phi_{AB}(\tau) = \lim_{T\to\infty} \frac{1}{2T} \int_{-T}^{T} f_A(t) f_B(t+\tau)\, dt \qquad (1)$$

The autocorrelation function of $f_A(t)$ is defined as

$$\phi_{AA}(\tau) = \lim_{T\to\infty} \int_{-T}^{T} f_A(t) f_A(t+\tau)\, dt. \qquad (2)$$

Here $f_A(t)$ and $f_B(t)$ represent time series such as signals or noise and τ represents a displacement in time. The crosscorrelation function is, then, a curve plotted against τ. Each point on the curve represents the average value of the product of $f_A(t)$, and $f_B(t)$ delayed by τ. The autocorrelation function can be described in a similar manner. These functions are especially useful, since they can be computed from the actual time series under consideration by means of electronic correlators where analytic calculations would be difficult or impossible.

The evaluation of a correlation function in its exact analytic form by electronic equipment would require continuous multiplication and integration over an infinite time interval for each value of τ desired. This would be inconvenient; but fortunately it can be shown that a close approximation to the correlation function can be obtained which is suitable for electronic computation. For the crosscorrelation function it takes the form,

$$\phi_{AB}(\tau) \simeq \frac{1}{N} \sum_{n=1}^{N} a_n b_n \qquad (3)$$

An analogous expression is valid for the autocorrelation function. Here a_n is a sample (instantaneous value) of $f_A(t)$ obtained at time t, and b_n is a sample of $f_B(t)$ obtained at time $(t+\tau)$. The approximate value of the correlation function for each value of τ is obtained by suming N products of sample pairs. The error involved in this process can be calculated, and it is found that when N is of the order of magnitude of 10,000, the accuracy is adequate for most purposes.

Correlators for obtaining this approximation can be constructed by utilizing pulse-circuit techniques. To obtain each point on a curve the following operations are needed: First, two samples of the input time series separated by the time τ are obtained. The two sample values are multiplied and the resulting product

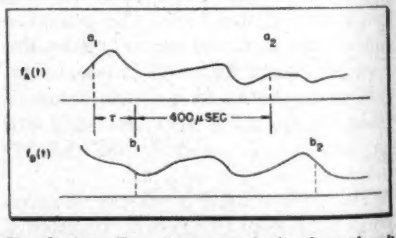

Fig. 2: Sampling sequence, single channel unit

stored. This process is repeated for N different pairs of samples. Then the N products are added and the resulting value displayed as one point on the curve. The entire process is repeated for each different value of τ desired. The increment in τ between successive points on the curve is referred to as $\Delta\tau$.

The multiplication and addition can be done by either digital or analog techniques. Experience has shown that digital equipment is inherently more accurate and flexible,

Channel Analog Correlator

but that analog equipment operates more rapidly and requires much simple circuitry. For example, the digital single-channel correlator [1] at the Research Laboratory of Electronics at M. I. T. contains 400 vacuum tubes; the single-channel analog correlator[2] there requires only 60. When $\Delta\tau$ is 1 μsec and 8000 sample pairs are taken, the digital correlator requires 20 seconds to compute one point on a curve; the analog correlator, ten seconds. For the computation of a complete curve of 110 points, the analog correlator needs 18 minutes, while a curve of five points takes 50 seconds.

Correlation Functions

The long-time intervals required to obtain complete correlation functions with this present equipment, in addition to being time consuming, limits the use of correlation techniques in many of their present applications. For example, the use of correlation functions makes it possible to detect the presence of a periodic signal obscured by noise. This suggests the possibility of an application to radar, but clearly, the periodic signal must be detected more rapidly than the correlators described above are capable of doing for any practical use to be made of this property. An additional difficulty presented by long-time intervals of computation is that the characteristics of the time series may change during the period of observation. Then, each point on the curve is obtained under different conditions, providing erratic results.

Equipment for the more rapid evaluation of correlation functions is, then, highly desirable. This paper describes a correlator[3] which has been designed with the primary objective of presenting rapidly the approximate form of a correlation curve, rather than obtaining a high degree of accuracy. Five points on the correlation function of a time series are obtained simultaneously. Because of this, and other time-saving features, a curve of five points is computed and presented in only four seconds for the same value of $\Delta\tau$ and number of sample pairs mentioned above. The correlator can be set to obtain any one of eight groups of five points along a curve. It was constructed for use as a practical laboratory tool and also to test the practicability of multi-channel correlators. Important characteristics of this equipment are given in Table I. A picture of the complete unit is shown in Fig. 1.

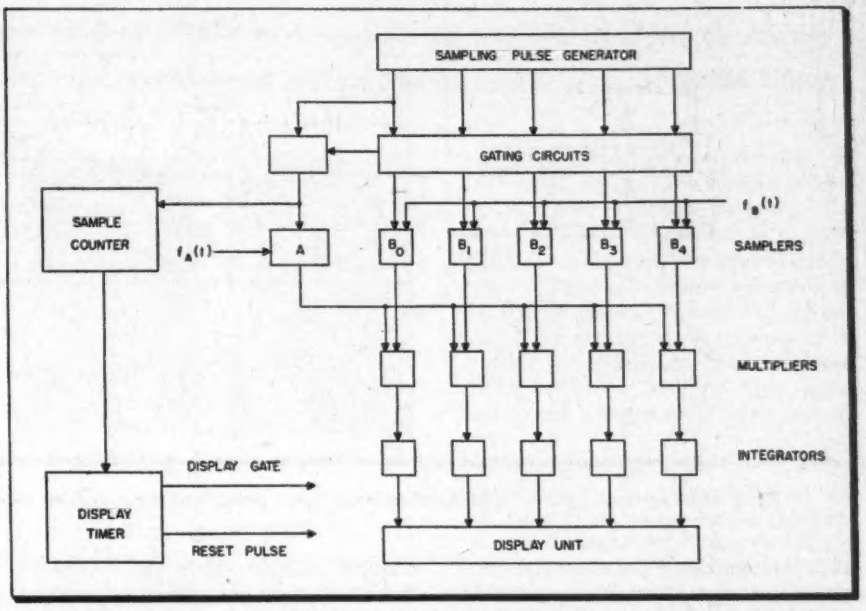

Fig. 3: Block diagram of the five-channel correlator shows arrangement for sampling time series

To aid in explaining the operation of the five-channel correlator, the operation of a single-channel correlator of the same type will first be described. As previously indicated, the evaluation of a crosscorrelation function involves the sampling of two time series, $f_A(t)$ and $f_B(t)$, at a time τ apart. This is shown in Fig. 2. The first two sample values, a_1 and b_1, are multiplied and the product stored. The circuits in this equipment require 400 μsec to complete this multiplication. After the 400 μsec a second pair of samples, a_2 and b_2, is obtained, multiplied and the product stored. This continues until a predetermined number of sample pairs has been obtained, at which time the process is stopped and the resulting sum of all the prod-

Fig. 4: Sampler operating sequence for obtaining (A) first and (B) second group of points on a curve
Fig. 5: (r) Sampling pulse generator derives pulses from 1-mc oscillator to trigger the ring-chain counter

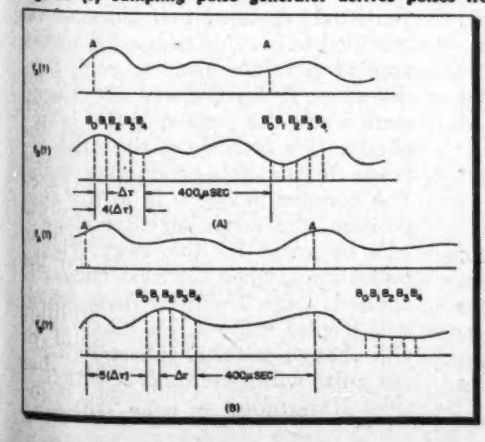

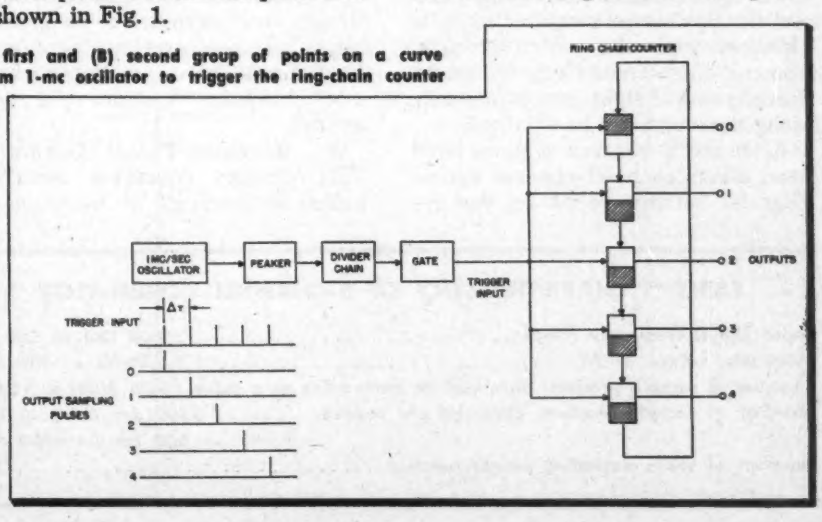

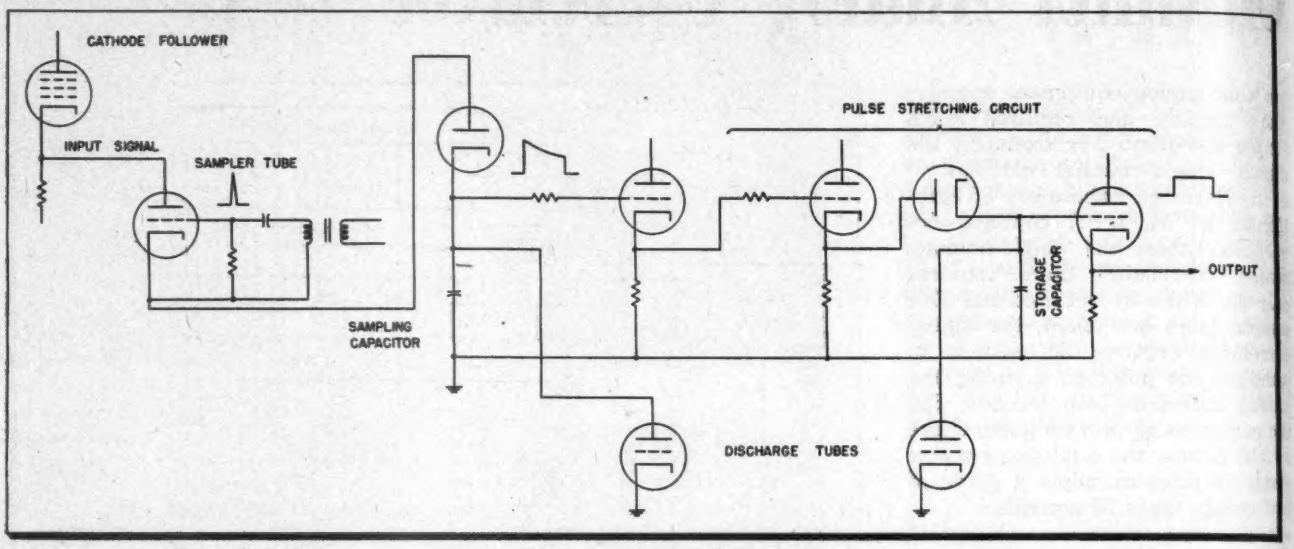

Fig. 6 Sampling circuit samples input signal during 0.2 μsec period and stores resulting value for 5000 μsec with less than 1% decay

ucts displayed as a point on the correlation curve for the particular value of τ used. The adder is then reset and the next point on the curve computed with the value of τ increased by the amount $\Delta\tau$.

The five-channel correlator operates in an analogous manner. A block diagram of this correlator is provided in Fig. 3. The time series $f_A(t)$ is sampled by the A channel sampler. Then $f_B(t)$ is sampled by the five B-channel samplers at five different times, the timing between the A sampling pulse and each B sampling pulse being correct so as to provide the desired value of τ. The sequence in which the samplers operate when obtaining the first group of points on a curve is indicated in Fig. 4(A) and for the second group of points on a curve in Fig. 4(B). The value of $\Delta\tau$ is set by the rate at which the sampling pulse generator is triggered. The proper timing between the A channel sampling pulse and the B_0 channel sampling pulse is obtained with the gating circuits. These gating circuits can be set so that any one of eight groups of points along the curve can be obtained.

After the B-channel samples have been taken, each B-channel multiplies its sample value by the A-channel sample value and transfers the product to its adder (the integrator). When the sample counter indicates that the proper number of sample pairs has been collected, the flow of products to the adders is stopped and the resulting values for the five different points on the curve displayed. The adders are reset after the display period, which is adjustable between seven and twenty seconds. The reset operation requires two seconds. The correlator can be set so that the entire process is then automatically repeated, or so that the next group of points along the curve is computed.

Circuitry

Some of the special circuits which were developed for this correlator will be described. Attempts were made to achieve simplicity in the circuitry in order to limit the correlator to a reasonable size. The component circuits were designed to be applicable to a larger correlator containing 50 channels, but the construction of this correlator has not yet been started.

A. Sampling-Pulse Generator: This circuit[4] generates sampling pulses at intervals of from one to 400 μsec depending on the desired value of $\Delta\tau$. These sampling pulses must be distributed to the five B-channels. Requirements of accuracy and wide frequency range led to the choice of a ring chain counter distributor circuit for this purpose.

Fig. 5 is the block diagram of the sampling pulse generator. A one megacycle oscillator, peaker and pulse-divider chain provide a train of pulses occurring at the desired interval of $\Delta\tau$. The pulses pass through a gate circuit which interrupts the pulse train during the 400-μsec periods which are required for the multiplication circuits to operate. The pulses which pass through the gate are applied to the ring-chain counter. The double blocks each represent one flip-flop (bistable multivibrator) stage, the shaded half representing the conducting tube in that stage. Positive triggering pulses are applied simultaneously to the cathodes of the upper tube in each stage; the plate of the lower tube is connected to the plate of the upper tube in the next stage. Thus the conventional scale-of-two counter is modified to provide triggering pulses applied simultaneously to each flip-flop stage. A flip-flop will not change state when the positive pulse is applied to the cathode of the tube already in the non-conducting state. The counter in Fig. 5 is in the zero position, the condition that stage 0 will be reset by the next trigger pulse. Thus, when the next trigger is applied, stage 0 will be reset which will trigger stage 1. No other stage will change state. A subsequent input pulse will reset stage 1, which in

(*Continued on page* 120)

TABLE I: CHARACTERISTICS OF 5-CHANNEL CORRELATOR

Input signal frequency range	200 CPS to 500 KC
Available values of $\Delta\tau$	1,2,4,20,80 or 400 μsec
Number of sample products obtained for each point on a curve	4000, 8000 or 16,000
Number of sample products obtained per second	2500 for $\Delta\tau$= 1 μsec 500 for $\Delta\tau$=400 μsec
Number of tubes excluding power supplies	215

Strain-Gage Remote Metering

AN/AKT-8 instrument incorporates multivibrator circuit in FM/FM system covering 215 to 230 MC range. Subcarrier oscillators packaged in miniature plug-in units

STRAIN gages are universally used for the measurement of airframe stresses and as the basic sensing element in many accelerometers, pressure gages and other measuring instruments. They can be made to have an accuracy of better than 1% of full scale, excellent linearity and temperature stability.

However, they are one of the most difficult types of instruments to incorporate into FM/FM telemetering systems. The main reason for this is the low ratio of output to input voltage. A full scale, open circuit output of 2.5 mv/v. input may be considered typical for many strain gage instruments. The resistance of the gages is between 120 and 1000 ohms, although we understand that at least one manufacturer now offers a gage of considerably higher resistance. Heat dissipation in the bridge arms limits the power input to approximately 0.25 watt for unbonded and one watt for bonded gages so that the maximum voltage that may be applied to a 120 ohm gage of either type is 5 and 10 volts, respectively. At full output, the bridge delivers 12.5 for the unbonded, and 25 mv for the bonded type into a high impedance load.

We now concern ourselves with the problem of converting the bridge output voltage to a variable frequency—constant amplitude voltage for FM/FM telemetering. One method which has been used extensively since about 1946 consists of a phase shift oscillator containing the strain gage bridge as a phase shift element. The frequency of the oscillator is dependent on the phase shift in the loop and therefore is a function of the bridge unbalance.

Stastny

Butts

By G. F. STASTNY & R. S. BUTTS
Melpar, Inc., 452 Swann Ave. Alexandria, Va.

A block diagram of this arrangement is shown in Fig 1a. One arm of the bridge is shunted by a capacitor so that a nearly 90° voltage, E_{xc}, exists at the bridge output when the arms are balanced. When the bridge is unbalanced a voltage of variable magnitude and either leading or lagging E_{xc} is added. The resultant is a vector voltage, E_o having a loci as shown in Fig. 1b. The frequency of the oscillator is dependent on the phase shift in the loop and therefore is a function of the bridge unbalance.

At bridge unbalance the oscillator operates at the frequency for which the phase shift in the RC network is approximately 90°.

For a frequency deviation of ± 7.5% of center frequency, which is usual for FM/FM systems, the corresponding phase shift in the RC network will need be approximately ± 4.3° (Fig. 1c). The magnitude of the quadrapture voltage E_{xc} is adjusted by selecting the value of C so that the resultant bridge output voltage phase swings the same amount at maximum bridge unbalance.

Fairly good linearity of control is possible since the cotangent of the low pass filter phase angle deviates from a straight line approximately 3.9% over a total variation of ± 4.3°. The loop gain variation as frequency changes may have a secondary effect on frequency of oscillation so as to possibly effect linearity. This has not been computed and experimental results show linearity of 2% may be obtained.

Determining Gain

The gain required in the amplifiers may be determined as follows. If the commonly used 120-ohm strain gage bridge is considered we would use a 9 to 1 turns ratio step down transformer between the driver tube and the bridge for proper impedance matching. The quadrature voltage should be 14 times the unbalance voltage, E_R, or 1/28 of the bridge input voltage for ± 4.3° phase deviation. The loss in the two stage RC phase shifter will be approximately 2. Therefore, the minimum gain required from the bridge output to the plate of the driver stage is approximately 500. The use of three stages provides a sufficient additional gain to permit negative feedback stabili-

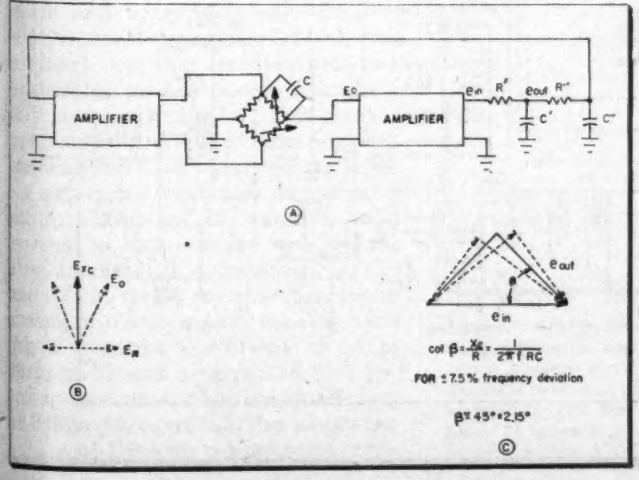

Fig. 1: (l) Phase shift circuit. Fig. 2: (r) Block diagram of the multivibrator circuit

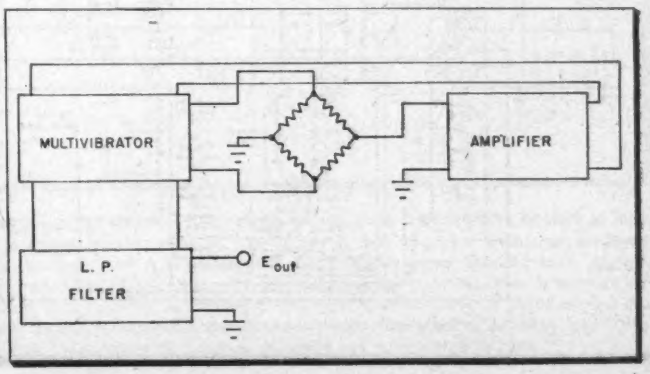

zation in the amplifier. An additional stage would be required to isolate a desirable low impedance output circuit from the high impedance oscillator circuits.

The output voltage is found to vary about 5% over the frequency range. A low pass filter is needed in the output to reduce the harmonic distortion to 1% or less.

Another circuit we have recently employed might be called a multivibrator bootstrap circuit. A block diagram is shown in Fig. 2. In this arrangement the bridge is driven with a square wave from the two cathodes of the multivibrator. The multivibrator grids are returned to a positive bias voltage. The frequency of the multivibrator is a linear function of the bias voltage over a considerable range.

The scheme is to superimpose the amplified bridge square wave output voltage onto the positive bias so as to make the instantaneous bias and, hence, frequency a function of the magnitude of the bridge output voltage. Remember that the grid of the tube which is not conducting in any half cycle is the only one to be affected by the instantaneous value of the external bias. If the bridge output voltage is not changing, both grids are exposed to the same value of bias since the polarity of the bridge output voltage switches as the multivibrator reverses. The circuit employs five triode sections.

Fig. 3 is a curve of multivibrator frequency as a function of positive bias and shows the control range for $\pm 7\frac{1}{2}\%$ frequency deviation. A bias voltage change of ± 5 volts is required. A practical value of bridge driving voltage for this arrangement is 1 volt peak to peak. For a maximum 2.5 millivolt bridge output an amplifier gain of 2000 is required. This can be obtained with transformer coupling and three triode stages with sufficient additional gain for negative feedback stabilization. A schematic of this circuit is shown in Fig. 4.

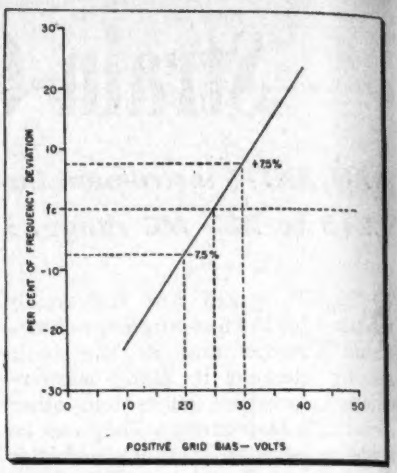

Fig. 3: Bias control characteristic for multivibrator shows range for a deviation of 7.5%

Regulated Plate Supply

It is desirable to use a regulated plate voltage supply for this multivibrator type subcarrier oscillator wherever possible since it is quite voltage sensitive. However, where battery operation is required, a circuit has been developed which greatly reduces the effect of plate voltage variation. The frequency of the multivibrator decreases with increasing plate voltage as shown in Fig. 7. By adjusting the dc positive bias applied to the grid returns of the multivibrator, the frequency may be readjusted to the nominal value for any given change in plate supply voltage. However, a nonlinear compensation is required. This is provided by using a 9002 triode tube as a nonlinear resistance element in a voltage divider circuit. The same compensating curve is applicable to all six subcarrier oscillators so that one compensator may be used to

Fig. 4: Circuit of multivibrator subcarrier oscillator employs triode stages with gain sufficient for negative feedback stabilization

CHANNEL	1	2	3	4	5	6	CHANNEL	1	2	3	4	5	6
Frequency	2300	3000	3900	5400	7350	12,300	Frequency	2300	3000	3900	5400	7350	12,300
C-108 & C-110	330 μμf	330 μμf	220 μμf	180 μμf	120 μμf	82 μμf	L-101	550mh	550mh	320mh	320mh	190mh	190mh
C-109 & C-111	100 μμf	---	33 μμf	10 μμf	22 μμf	---	R-137	18K	15K	15K	15K	15K	10K
C-113 & C-114	0.01 μf	0.0056 μf	0.0056 μf	0.0027 μf	0.0027 μf	0.00082 μf	R-135	3.3K	4.7K	4.7K	4.7K	4.7K	3.9K

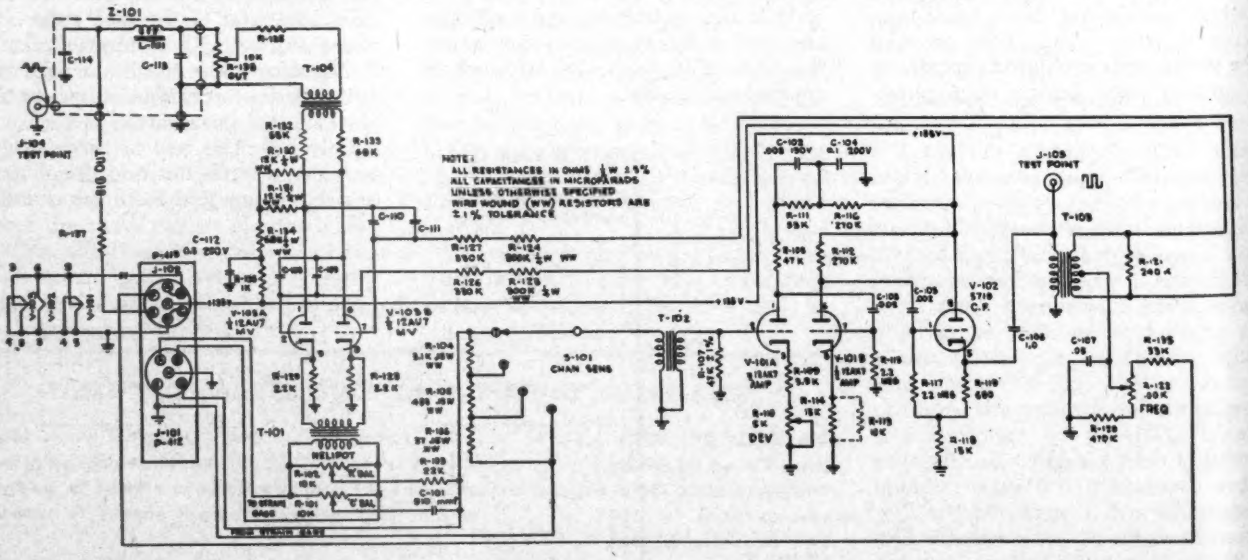

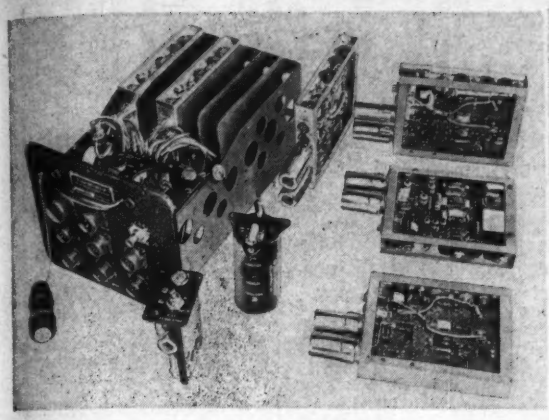

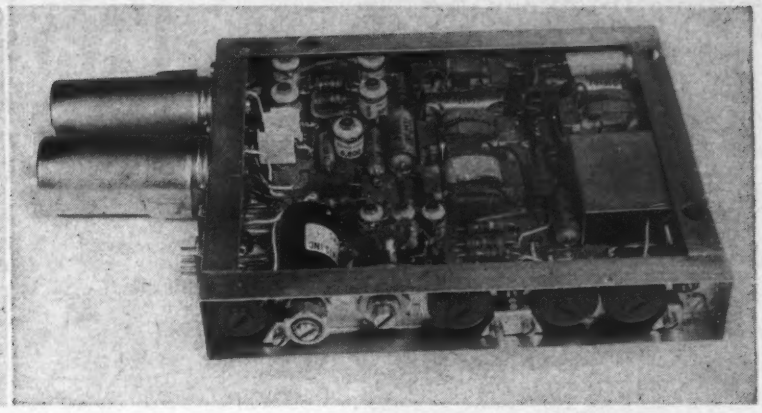

Fig. 5: (1) Exploded view of AN/AKT-8 FM/FM telemetering transmitter. Fig. 6: (r) One of six miniature plug-in subcarrier oscillators in AN/AKT-8

regulate all six oscillators simultaneously.

To maintain reasonable accuracy under varying temperature conditions, the RC combination in the grid circuit of the multivibrator is designed to remain nearly constant under varying temperature conditions.

Temperature Coefficient

The capacitors used in the grid plate coupling circuits of the multivibrator are vitreous enamel dielectric type having a temperature coefficient of +120 parts per million per degree C. This coefficient is quite

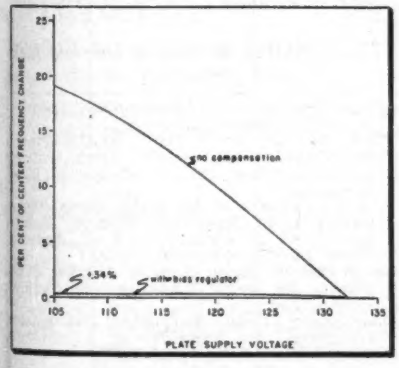

Fig. 7: Plate voltage compensation curve

stable and apparently reproducible in production quantities. In fact, the tolerance on the temperature coefficient is stated by the manufacturer to be ± 5 ppm/°C. If this positive temperature coefficient can be matched with a stable resistor having a negative coefficient of the same value, a constant RC product with respect to temperature will result. This condition is approached by the use of a series combination consisting of a wirewound resistor having a negative coefficient of 10 to 30 ppm/°C and a deposited film resistor having a negative coefficient of 280 to 420 ppm/°C. The resistance values of the two resistors are proportioned so that the resultant temperature coefficient of the combination is —120 ppm/°C.

Resistors and capacitors having standard production tolerances of temperature coefficient have been used in a limited number of oscillators with a fairly low rejection rate of completed oscillators due to excessive temperature drift. The latter can be held to a value less than ± .75% of center frequency over a temperature range of —17 to +40°C.

This multivibrator type circuit has been incorporated into a six channel FM/FM telemetering transmitter which bears the nomenclature AN/AKT-8. This is shown in Fig. 5. The six subcarrier oscillators are packaged as individual plug-in units, miniature construction being used. Fig. 6 is a photograph of one of these units. The overall dimensions of each of the subcarrier oscillators are 8.5 x 5 x 1 inches and the weight is 1.5 lbs. The use of an etched foil conductor process results in a readily serviceable unit with access to all components. With the exception of the capacitors in the multivibrator and the components in the output circuit, all six channels use the same parts.

Resistance and capacitance bridge balance controls have been incorporated into each of the subcarrier chassis so that no external bridge

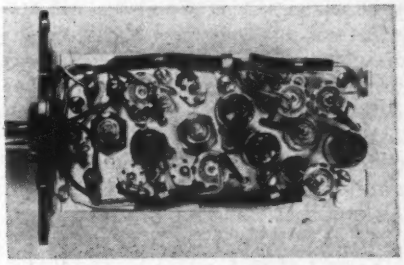

Fig. 8: R-F transmitter covers 215-230 MC

balancing components are required in the installation.

The AN/AKT-8 employs an r-f transmitter having a diameter of 2 in. and a length of 4 in. It is shown in Fig. 8. The weight of the r-f transmitter is 1 lb. The transmitter

(*Continued on page* 176)

NBS RADIO SERVICES

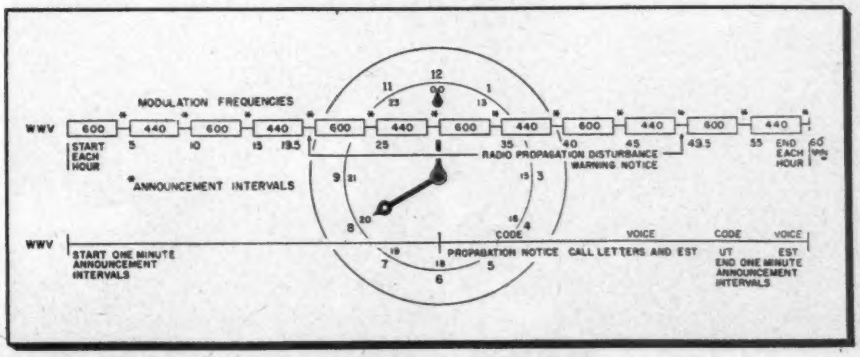

Schematic diagram showing services offered by NBS Radio Broadcasting Station WWV. At start of each hour, a 600-cycle tone is heard for four minutes. This is interrupted by a 1-minute announcement period in which Eastern Standard Time is announced in voice and Universal Time in code. At conclusion of announcement period, a 440-cycle tone is transmitted for four minutes. Announcements are repeated for new time and then followed by 4-minute 600-cycle tone. A pulse of 0.005-second duration at intervals of one second is broadcast simultaneously with audio notes. At 19½ and 49½ minutes past the hour, radio propagation disturbance warnings are transmitted in code.

Preview of the 1953

Record-breaking meeting to hear 220 technical dustries. Turnout of 30,000 engineers expected

Once again New York City plays host to the IRE's National Convention, March 23-26, 1953. Some 220 technical papers will be presented at 43 sessions held in the Waldorf-Astoria Hotel, Belmont Plaza, and Grand Central Palace. A record attendance of 30,000 radio engineers from all over the world is expected to view the 400 exhibits which will fill the four floors of Grand Central Palace. Exhibits on the third and fourth floors will be grouped according to such subjects as audio, components, instruments, mobile equipment, military radio and computers. Several theaters will be provided for audio and TV demonstrations. The comprehensive display of radio-electronic aparatus is valued at $10 million.

Convention Highlights

Other highlights of this impressive 1953 Convention will include the presentation of the gavel of office to IRE president J. W. McRae by his predecessor D. B. Sinclair, and the principal address by William R. Hewlett of Hewlett Packard Co. at the March 23 opening meeting at 10:30 AM in the Waldorf-Astoria Grand Ballroom. A get-together cocktail party will be held the evening of March 23. On March 25, the Annual IRE Banquet will feature an address by David Sarnoff.

Since Grand Central Palace is not expected to be available next year, plans are under way to hold the 1954 Convention in the Kingsbridge Armory, Bronx, N. Y., one of the largest in the world.

The technical program includes the following papers:

Grand Central Palace, scene of this year's IRE Show, will display over 400 exhibits in 1953

Monday, March 23

ANTENNAS I—GENERAL

"The Measurement of Highly Directive Antenna Patterns and Over-All Sensitivity of a Receiving System by Solar and Cosmic Noise"—J. Aarons, Air Force Cambridge Research Center.
"Radiation Patterns for Aperture Antennas with Non-Linear Phase Distributions"—C. Allen, General Electric.
"Factors Affecting Radiation Patterns of Corrugated Surface Antennas"—M. Ehrlich and L. Newkirk, Hughes Aircraft.
"A Microwave Anechoic Chamber for Antenna Pattern Measurements"—A. H. Simmons, Naval Research Lab.
"Wide-Frequency-Range Tuned Circuits and Antennas"—A. G. Kandoian and Sichak, Federal Telecommunication Labs.

TELEVISION I

"Theory of Synchronization Applied to NTSC Television"—D. Richman, Hazeltine.
"Color Synchronization in the NTSC Color Television Receiver by Means of the Crystal Filter"—W. E. Good, General Electric.
"Automatic-Phase-Control Color Synchronization for NTSC Color Television"—D. Richman, Hazeltine.
"Transient Response In a Color Carrier Channel With Vestigial Side Band Transmission"—J. S. S. Kerr, General Electric.
"Transients in Color Television"—P. W. Howells, General Electric.

CIRCUITS I—NETWORK THEORY

"A General RLC Synthesis Procedure"—L. Weinberg, Hughes Aircraft.
"A General Theory of Wide-band Matching"—H. J. Carlin and R. LaRosa, Polytechnic Institute of Brooklyn.
"Synthesis of Electric Filters With Arbitrary Phase Characteristics"—B. J. Bennett, Stanford U.
"Wide-Band Filter Amplifiers at Ultra-High-Frequencies"—J. M. Pettit, W. A. Christopherson and D. O. Pederson, Stanford U.
"Network Analysis With the Aid of Generating Polynomials"—H. Kurss, Polytechnic Institute of Brooklyn.
"Two New Equations for the Design of Filters"—M. Dishal, Federal Telecommunication Labs.

ELECTRONIC COMPUTERS I

"Multichannel Analog Input-Output Conversion System for Digital Computer"—P. A. Adamson and M. L. MacKnight, Hughes Aircraft.
"An Analog to Digital Converter With an Improved Linear Sweep Generator"—D. W. Slaughter, Calif. Institute of Technology.
"Dynamic Binary Counter With Analog Read-Out"—L. Packer, Columbia U.
"Life and Reliability Experience With Transistors in a High Speed Digital Computer"—J. J. Scanlon, Bell Tel. Labs.
"Engineering Experience in the Design and Operation of a Large Scale Electrostatic Memory"—J. Logue, A. Brennemann and A. Koelsch, IBM.

SYMPOSIUM: INSTRUMENTATION I—AUTOMATIC

"A New Method for Measuring Noise Figure and Gain of a Radar Receiver"—R. J. Parent and V. C. Rideout, U. of Wisconsin.
"Automatic Instrumentation for Continuous Monitoring of Systems Performance"—M. V. Ratynski, M. Kant and H. Webb, Rome Air Development Center.
"Automatic One-Shot Methods for Bandwidth Measurement"—J. B. Woodford, Jr. and E. M. Williams, Carnegie Institute of Technology.
"Microwave Power Meter with Automatic Zero Setting and Telemetering"—L. A. Rosenthal and G. M. Badoyannis, Rutgers U.
"Monitoring of Errors in Synchro Servo Systems"—G. Quazza, Polytechnic Institute of Brooklyn.

RADIO LOCATION, NAVIGATION AND AIRBORNE ELECTRONICS

"The Technique of Monopulse Radar"—W. Hausz, General Electric.
"Reducing Sky Wave Errors in CW Tracking Systems"—M. S. Friedland, Patrick Air Force Base, and N. Marchand, Electronics Lab.
"An Application of Integrator Type Signal Enhancer to Direction Finding Equipments"—C. A. Strom and J. A. Fantoni, Rome Air Development Center.
"A Theory of Target Glint or Angular Scintillation in Radar Tracking"—H. Delano, Hughes Aircraft.
"Automatic Dead Reckoning Navigation Computers for Aircraft"—J. L. Dennis, Wright Air Development Center.

Tuesday, March 24

ANTENNAS II—MICROWAVE

"Arrays of Flush Mounted Travelling Wave Antennas"—J. N. Hines, V. H. Rumsey and T. E. Tice, Ohio State U.
"Transient Build-Up of the Antenna Pattern in End-Fed Linear Arrays"—N. H. Enenstein, Hughes Aircraft.
"A New Microwave Reflector"—K. S. Kelleher, Naval Research Lab.
"Crosstalk in Radio Relay Systems Caused by Foreground Reflections"—H. W. Evans Bell Tel. Labs.
"Low Side Lobes in Pencil-Beam Antennas"—E. M. T. Jones, Stanford Research Institute.

TELEVISION II

"Probability Distribution Measurements of Television Signals"—W. F. Schreiber, Cruft Lab., Harvard U.
"Colorimetric Properties of Gamma-Corrected Color Television Systems"—D. C. Livingston, Sylvania.

IRE Convention

papers covering all phases of the electronic into view 400 exhibits valued at $10 million

"Phase Measurements at Subcarrier Frequency in Color Television"—A. P. Stern, General Electric.
"A Precision Line Selector for Television Use"—I. C. Abrahams and R. C. Thor, General Electric.
"A Monitoring System for NTSC Color Television Signals"—C. E. Page, Hazeltine.

CIRCUITS II—SYMPOSIUM: PANEL DISCUSSION ON WIDEBAND AMPLIFIERS

"Conventional Amplifiers"—W. Bradley, Philco.
"Feedback Amplifiers"—H. N. Beveridge, Raytheon.
"Transistor Amplifiers"—R. L. Wallace, Bell Tel. Labs.
"Distributed Amplifiers"—W. G. Tuller and E. H. Bradley, Melpar Electronics.
"Traveling Wave Tube Amplifiers"—L. Field, Stanford U.

ELECTRONIC COMPUTERS II

"Analog Computing with Magnetic Amplifiers Using Multi-Phase A-C Voltages"—J. E. Richardson, Hughes Aircraft.
"Some Recent Developments in Logical 'Or-and-Or' Pyramids for Digital Computers"—C. Leondes, U. of Pennsylvania.
"Magnetic Core Switches as Logical Elements in Computers"—E. A. Sands, Magnetics Research.
"Magnetic Shift Register Using One Core Per Bit"—R. D. Kodis, S. Ruhman and W. D. Woo, Raytheon.
"Simple Computer for Automatically Plotting Correlation Functions"—A. H. Schooley, Naval Research Lab.

(*Continued on page* 135)

Dr. James W. McRae
President of the IRE for 1953

TECHNICAL PAPER TOPICS, SYMPOSIA, and THEIR LOCATIONS for 1953 IRE CONVENTION

	BELMONT-PLAZA	WALDORF-ASTORIA			GRAND CENTRAL PALACE	
	Moderne Room	Grand Ballroom	Astor Gallery	Jade Room	Gold Hall	Blue Hall
Mon. P.M. 2:30	Antennas I - General Session 1	Television I Session 2	Circuits I - Network Theory Session 3	Electronic Computers I Session 4	Symposium: Instrumentation I - Automatic Session 5	Radio Location, Navigation and Airborne Electronics Session 6
Tues. A.M. 10:00	Antennas II - Microwave Session 7	Television II Session 8	Circuits II - Symposium: Panel Discussion on Wideband Amplifiers Session 9	Electronic Computers II Session 10	Instrumentation II - Symposium: Transistor Measurements Session 11	Significant Trends in Airborne Equipment Session 12
Tues. P.M. 2:30	Antennas III - Propagation Session 13	Symposium: Diagnostic Programs and Marginal Checking for Large Scale Digital Computers Session 14	Circuits III - Time Domain Networks - Delay Lines Session 15	Electron Devices I - Transistors Session 16	Instrumentation III - Electronics Session 17	Symposium: Trends in Mobile Communications Session 18
Tues. Eve. 8:30		Session 19 (to be announced)				
Wed. A.M. 10:00	Electron Devices II - Electron Tubes Session 20	Circuits IV - Active Networks - Transistors Session 21	Noise and Modulation Session 22	Symposium: Television Broadcasting Session 23	Quality Control Methods Applied to Electron Tube and Electronic Equipment Design Session 24	Seminar: Acoustics for the Radio Engineer - I Session 25
Wed. P.M. 2:30	Electron Devices III - Microwave Tubes Session 26	Information Theory I - Recent Advances Session 27	Communications Systems Session 28	Symposium: Television Broadcasting and UHF Session 29	Microwaves I - Symposium: Manufacture of Microwave Equipment Session 30	Seminar: Acoustics for the Radio Engineer II Session 31
	Moderne Room	Grand Ballroom	Starlight Roof	Sert Room	Gold Hall	Blue Hall
Thurs. A.M. 10:00	Symposium: Nucleonics Session 32	Information Theory II - Theoretical Session 33	Medical Electronics Session 34	Broacast and Television Receivers - I Session 35	Microwaves II - Discontinuities and Transitions Session 36	Radio Telemetry Session 37
Thurs. P.M. 2:30	Audio Session 38	Engineering Management Session 39	Information Theory III - Coding Session 40	Broadcast and Television Receivers - II Session 41	Microwaves III - Ferrites and Detectors Session 42	Remote Control Systems Session 43

RELIABILITY OF
Filamentary Subminiature Tubes

Performance records show over 50,000 hours of satisfactory operation for each failure. Rugged construction withstands extreme shock and vibration

By ROSS WOOD
Raytheon Manufacturing Co., 55 Chapel St., Newton 58, Mass.

ONE of the requirements of reliable tubes is uniformity of characteristics, not only from tube to tube, but as shown by stability of characteristics throughout the expected or intended operating life. For one application reliability might be achieved by long life under normal conditions of operation. In another application a short operating life of a few hundred hours or perhaps even a few hours might be acceptable in exchange for greater freedom from early failures under severe operating conditions. Still another might require a high probability of successful operation for at least an extremely short time immediately after a long period of inactivity.

Different Environments

Another important requirement of a reliable tube is its ability to operate satisfactorily in a wide range of different environments. In various applications, extremes of ambient temperature are encountered. In some cases shock and vibration may constitute the principal hazard. Perhaps a short period of severe shock or vibration might cause permanent damage to the structure thus leaving the tube in an inoperative condition after the environment had changed to a more flavorable one. Operation might be required during shock and vibration in which case the resulting electrical output would be the principal cause of concern.

A third requirement is the ability to function satisfactorily over a wide range of electrical operating conditions. A single tube type may be expected in one application to afford reliable operation in conservative Class A amplifier service, in another the demand will be for high peak current in a Class C circuit, and in still another freedom from grid emission may be the outstanding requirement. At the same time each of these applications may require the tube to deliver its own peculiar kind of service while the voltages supplied to it are varying.

Design Factors

In view of these requirements it is worthwhile to outline briefly the design factors which are common to both filamentary cathodes and indirectly heated cathodes before proceeding with a more detailed discussion of the filamentary subminiature tube. Of course, good workmanship and adequate processing are prerequisites to reliability in a tube of any size, shape or construction. Uniformity of characteristics from tube to tube requires, in addition, that the mechanical design should provide precise control of the critical spacings between elements. Under conditions of shock and vibration it is necessary to limit the relative motion between elements. This motion can originate at the supports, for example from a loose fit between the grid siderods and the micas, or from the bending of the element. In either case, in order to minimize the electrical output it is quite important to maintain symmetry with respect to the plane through the grid siderods and the cathode.

Let us now compare the factors affecting reliability in indirectly heated cathode tubes which differ from those affecting reliability in filamentary types. First we have the possibility of failure of the heater structure. This is most likely to happen in one of three ways: heater-cathode shorts may result from the mechanical failure of the insulating heater coating or from inadequate spacing between uncoated portions of the heater and the cathode, heater-cathode leakage may develop, or open heaters might result from damage done to the heater wire while it was being formed or from portions of the heater with low thermal inertia overheating when the power is first applied. In the filamentary type tube, since there is no separate heater and cathode, the hazard of heater-cathode shorts or leakage is non-existent. The reduction in the number of parts by the elimination of the heater-cathode assembly and the reduced number of welds further reduce the hazard of mechanical failure in the filamentary tube. The hazard of the open filament as compared with the open heater is somewhat reduced because of the greater structural simplicity of the filament and its lower operating temperature.

Spacing of Elements

Another significant difference between the cathode-type and the filamentary-type lies in the relative spacings from cathode to grid. The need for improved characteristics has forced the designer of the cathode-type tubes to resort to extremely close spacings of approximately two thousandths of an inch between the cathode coating and the inner surface of the grid winding. The closest corresponding spacing found in the filamentary types is about twice this distance or 0.004 in.

TABLE I: Life Tests Representing 13,500,000 Tube-Hours

Nature of Failure	Number of Tubes Failing	% of Tubes Failing	Tube-Hours Per Failure
Glass	9	0.03	1,500,000
Mechanical	48	0.18	284,000
Characteristic	197	0.72	69,000
All	254	0.93	54,000

TABLE II: Life Tests Representing 47,000,000 Tube-Hours

Nature of Failure	Number of Tubes Failing	Tube-Hours Per Failure
Glass	16	3,000,000
Mechanical	120	397,000
Characteristic	685	69,000
All	821	58,000

This greater spacing in the filamentary tube is brought about not so much from the desire for greater reliability at the expense of characteristics as from the fact that we do not know how to make the tube in production quantities with the closer spacing.

Emission Efficiencies

Still another difference between the two types of cathode is shown by a comparison of thermionic emission efficiencies. In the cathode-type CK6148, which is the reliable subminiature counterpart of the 6AK5, we use in normal operation a space current of 10 ma or 8 ma/watt of heater power, whereas in the filamentary subminiature type 1AD4 the corresponding figure is 3 ma or 24 ma/watt. If we make the comparison on the basis of the ratio of mutual conductance to total power input, we find that the CK6148 provides 2,000 micromhos per watt while the 1AD4 shows 8,000 micromhos per watt. Thus for applications where the heat introduced by the tube is important to reliability the filamentary type has the advantage.

The filamentary subminiature has much to offer in its ability to withstand severe shock and vibration without suffering permanent damage. In both types of subminiature the factors of small size, low mass, and short spans both lengthwise and laterally contribute greatly toward improved strength. The effect of short spans is of particular importance since, under a given acceleration, the deflection of a beam is directly proportional to the fourth power of the length. Thus a 1% decrease in the length of an element results in about a four percent decrease in the deflection. Since the bending moment varies as the square of the length, a 1% reduction length will accommodate a 2% increase in acceleration before permanent deformation results. In addition the filamentary type offers a very much smaller cathode mass than does the heater-cathode combination with consequent reduction of the hazard of mica damage as a result of shock. Again comparing the 6AK5 with the 1AD4, the ratio of cathode assembly masses is about 100:1.

Shock and Vibration

In many of the applications which have developed in recent years a highly important, and frequently absolutely essential, requirement for reliability is that the electrical output during shock and vibration should be so low as to approach the inherent thermal noise level of the system. In order to minimize the electrical output during vibration, two important factors must be considered. One is the reduction of relative motion between the tube elements, the other is the attainment of both electrical and mechanical symmetry with respect to the two working faces of the cathode.

Motion Between Elements

Several methods have been employed successfully with both filamentary and cathode types to reduce the motion between the tube elements and the supporting mica spacers. These include the use of tight grid-holes and cathode-holes in the micas, the use of double mica spacers both top and bottom, and in some cases the more positive anchorage of the grids by means of straps or stakes riveted to the mica.

The next factor requiring attention in the reduction of relative motion is the bending of the elements under conditions of shock and vibration. This manifests itself in two ways: as excitation of mechanical resonances within the structure, and as forced vibration of the elements at frequencies far removed from the natural resonant frequencies.

(*Continued on page 112*)

Navy Releases Authorized Reliable Tube List

THE Department of the Navy has issued a reliable tube list describing tube types, lower quality counterparts, approved supply sources, and factors affecting interchangeability. They are divided into two groups: Group A, production types; and Group B, development-production types. The pertinent specifications and interchangeability factors (where present) are described in the footnotes below the main listing, which supersedes listings prior to Nov. 13, 1952.

GROUP A PRODUCTION TYPES

Spec. No.	Reliable Tube Type	Lower Quality Counterpart	Approved Source
2	5Y3WGTA	5Y3GT	Hytron
4	6AU6WA	6AU6	G.E.
4	6SK7WA	6SK7, 6SK7W	G.E.
4	5654	6AK5, 6AK5W	Raytheon, G.E., RCA Sylvania, Tung-Sol
4	5670[a]	2C51	G.E., Bendix, Raytheon
1	5686	——	G.E., Raytheon
4	5725	6AS6, 6AS6W	Raytheon, G.E.
4	5726	6AL5, 6AL5W	Raytheon, G.E., Tung-Sol, Hytron, Sylvania, RCA G.E.
3	5727	2D21, 2D21W	G.E., Sylvania,
4	5749	6BA6	Raytheon, Tung-Sol G.E.
4	5750	6BE6	G.E.
4	5751[a,c]	12AX7	G.E., Raytheon,
4	5814[a]	12AU7	Hytron, Sylvania
4	6005	6AQ5, 6AQ5W	G.E.
4	6072[a]	12AY7	G.E.
4	6135[a]	6C4, 6C4W	G.E.

a. Reliable tube draws 1/6 more heater current than counterpart
b. Reliable tube bulb shape different than counterpart

GROUP B DEVELOPMENT-PRODUCTION TYPES

Spec. No.	Reliable Tube Type	Lower Quality Counterpart	Approved Source
11	OA2WA	OA2, 6073	Hytron
11	OB2WA	OB2, 6074	Hytron
11	5R4WGYA[b]	5R4GY, 5R4WGY	Chatham
5	5Y3WGTB	5Y3GT	G.E.
6	6AC7WA	6AC7, 6AC7W	G.E.
11	6AK6WA	6AK6	National Union
11	6AN5WA	6AN5	Raytheon
9	6C4WA[b]	6C4, 6C4W	Raytheon
7	6J4WA	6J4	RCA, Sylvania
8	6J6WA	6J6, 6J6W	Raytheon, Sonotone, Westinghouse
11	6SN7WGTA	6SN7GT, 6SN7WGT	Sylvania
6	12AT7WA	12AT7	G.E.
11	807WA[b]	5933, 807W, 807	Sylvania
9	5651WA	5651	Chatham, Raytheon
11	5687WA	5687	Tung-Sol
10	6080WA[b,d]	6080, 6AS7G	RCA

1. MIL 28 Feb. 1952
2. MIL 25 June 1952
3. MIL 27 Aug. 1952
4. MIL 28 Oct. 1952
5. BuShips 20 Jan. 1952
6. BuShips 28 Jan. 1952
7. BuShips 4 Feb. 1952
8. BuShips 21 Feb. 1952
9. BuShips 4 Mar. 1952
10. BuShips 5 Mar. 1952
11. BuShips 13 Mar. 952

c. Reliable tube mu is 70 instead of 100
d. Reliable tube base different than counterpart

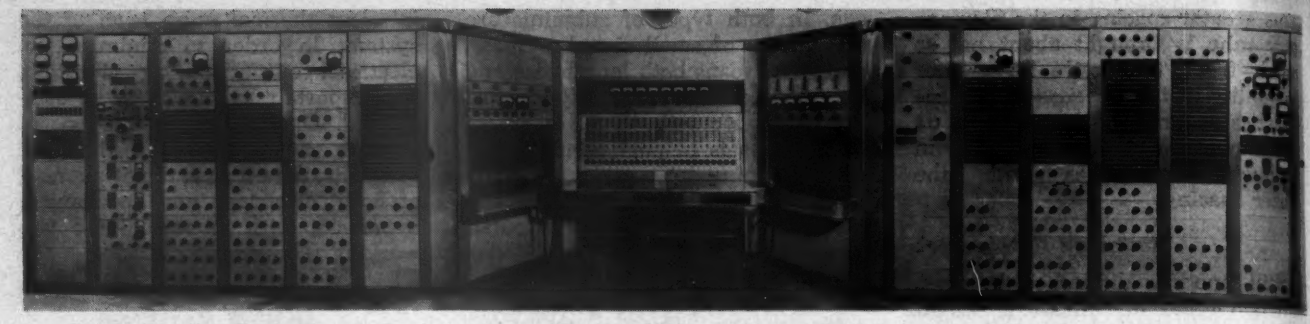

Fig. 1: Canadian Broadcasting Corporation's master control installation at Montreal feeds the outputs of 24 studios to eight network lines

Avoidance of Crosstalk in Large Audio Distribution Systems

Master control at Canadian Broadcasting Corp., one of world's largest, uses unshielded wire to interconnect 180 program amplifiers

FOR more than a year, the new Master Control equipment at the Montreal headquarters of the Canadian Broadcasting Corporation has been in full operation. This system is one of the largest in the North American continent, and mainly in order to save space and installation labor, nearly all the wiring is carried out in unshielded telephone cable. In spite of this, the performance of the equipment, especially as regards noise and crosstalk, is of a very high order.

The installation, is pictured in Fig. 1. The center section comprises the preset switching system, connecting as required the outputs of 24 studios to eight outgoing network lines, together with input and output gain controls and output volume indicators. The right hand wing houses the order wire switchboard and the volume indicators and switching associated with five local transmitter lines. In the left hand wing are the control panel for an elaborate monitoring selector and a device for feeding various cue programs back to the studios. The remainder of the bays carry the 180 program amplifiers and their associated jackfields, as well as such accessories as receivers, test equipment, and power distribution panels.

More Wire Needed

At the request of the C.B.C., and in order to facilitate any changes in circuitry which future operations require, the inputs and outputs of every amplifier are connected to their corresponding jacks by way of

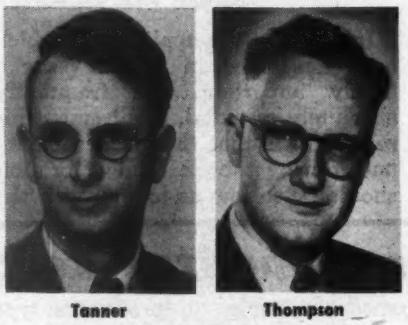

Tanner Thompson

By R. H. TANNER and G. B. THOMPSON

Northern Electric Co., Ltd. Belleville, Ontario, Canada

a large telephone type distribution frame (Fig. 2), located on the floor below, on which the cross jumpering may readily be changed. While this is obviously a very valuable feature from the point of view of the user, it results in a very considerable increase in the amount of wire required. For example, an incoming network program may be taken from the distribution frame to the main panel or down again thirteen times before it reaches an outgoing line. The possibilities of picking up crosstalk and noise are obvious. Fig. 3 shows the rear of a portion of the equipment, and illustrates the size of cables necessary even with unshielded wire. It is obvious that the use of shielded pairs would have been virtually impossible.

We may now turn to the precautions taken in the original design to avoid crosstalk and to the remedies which had to be applied to cure the crosstalk which manifested itself when the equipment had been built and installed. The first requirement, of course, is good well paired and balanced cable. Good telephone cable, now available in both lead and plastic sheaths, has a very high inherent attenuation from pair to pair provided that considerable care is exercised in the installation and wiring. For example, the lay of the twisted pairs should never be disturbed except at the very ends where, of course, the wires have to be fanned out for connections. In particular, the accidental use of "split pairs," which in a large multiconductor cable is sometimes only too easy, must be avoided at all costs, since it will inevitably introduce a large amount of crosstalk and yet may be extremely difficult to locate.

Cost Factors

As far as the amplifier design is concerned, the additional cost of well shielded input transformers, which may be used in systems in which the balance of the interconnecting circuits is none too good, must be weighed against the cost of improving this balance so as to allow the use of lower quality transformers. In a large system such as we are dealing with, it is probable that the saving effected through the use of unshielded transformers more than pays for the additional precautions needed in the cabling. It is also important that, where several amplifiers are to be fed from a common power supply, the distortion should be kept to a very low figure (less

than 1%), as otherwise any common coupling in the power leads can cause crosstalk during passages of heavy program. For the same reason, the use of amplifiers other than Class A should be avoided. In our case, considerable trouble was caused by the inclusion of a 1 ohm metering resistor in the common B- return of each nest of four amplifiers. The power supplies should be of the voltage regulating type in order to ensure the lowest possible output impedance.

Grounding Arrangements

In any large system, the grounding arrangements are always important. In particular, care must be taken to keep shielding and current carrying grounds separate, except for a single connection, the location of which may sometimes have to be determined experimentally. The main building ground must be adequate and, if possible, leakage from any item of equipment to this point should be prevented. For example, it may sometimes be necessary to insulate the racks from a floor in which steelwork is present. Originally, the C.B.C. installation was equipped with a heavy conductor connecting the common B- of all the power supplies to the building ground: it was found necessary to cut this, and ground the B- to the equipment frame at a point adjacent to the meter panel.

As far as the grounding of the program circuits themselves is concerned, two different systems are practicable. The first is to ground all the available center taps (such as transformers, balanced potentiometers, pads, etc.); the second is to ground as few as possible, normally one on each circuit loop. The latter is usually preferable as it eliminates the possibility of longitudinal magnetic pickup in the cables.

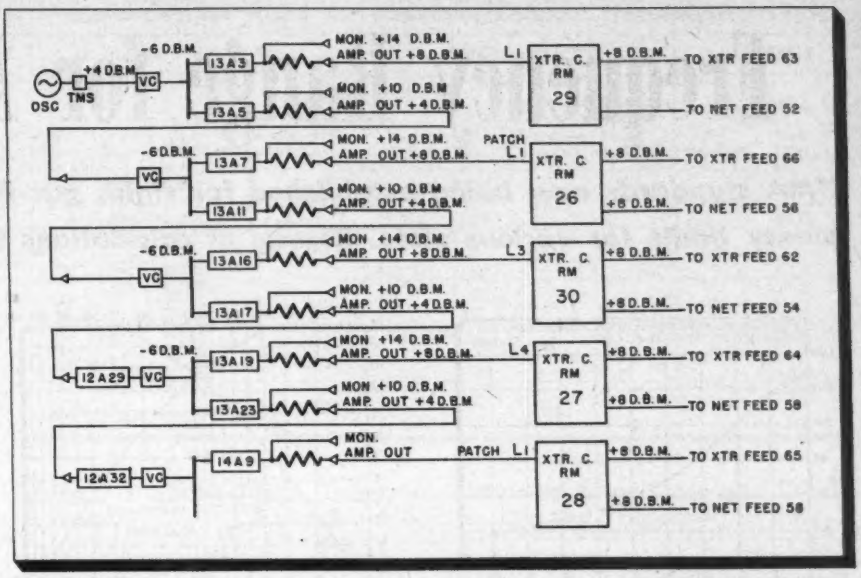

Fig. 4: Set-up for measuring crosstalk employs tone fed into five inputs, energizing 105 amplifiers

Differential Ohmmeter

Stray and unintentional grounds are of course quite fatal and must be discovered and eliminated at the earliest possible stage. For this purpose, we used a home made gadget called a differential ohmmeter (or more familiarly, a "whiffledink") which is shown in Figure 5. The device consists of a dc selsyn of the aircraft fuel gauge type, a battery and a jack. When patched to a circuit, it detects a grounded conductor and identifies it. Similarly, by deliberately grounding one end of a pair, the other end may readily be found.

In general, throughout a system of this kind, all circuits of any length should be balanced to ground with reasonable accuracy. In the apparatus under discussion this is done with all the busbars across which amplifiers are bridged, either by the use of balanced attenuators, the center points of which are grounded, or by two equal resistors from each side to ground. Of course in cases where the circuit is fed from or terminated in a center tapped transformer, the connection of this tap to ground often provides the simplest and most accurate means of balancing. In practice, it is sometimes pos-

(*Continued on page* 147)

Fig. 2: (l) Front view of distribution frame shows flexible jumper-jack arrangement for changing amplifier connections. Fig. 3: (r) rear view

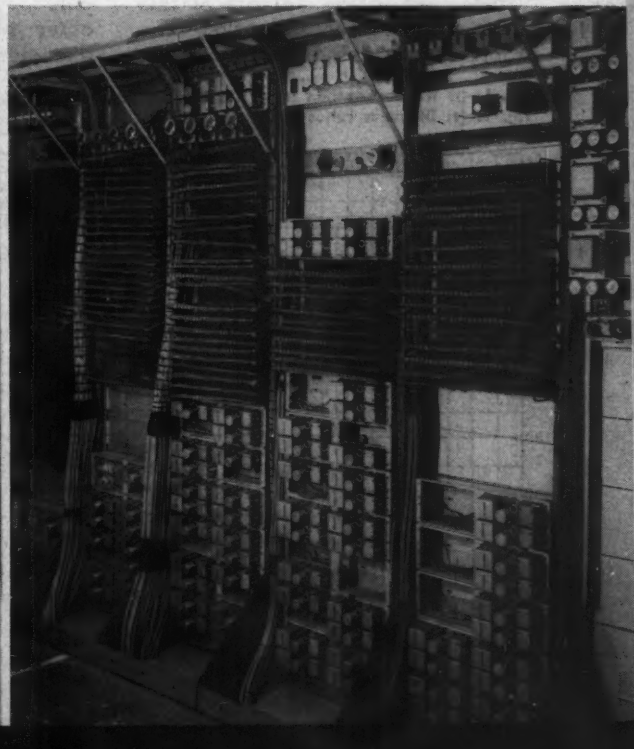

Frequency Range for Air-Dielectric

RTMA standards now being established for rigid, gas-filled coaxial lines set up frequency limits for various sizes. Results of calculations for 50-ohm and 75-ohm lines

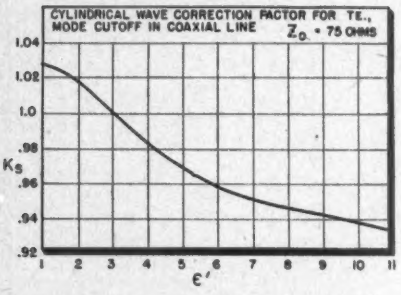

Fig. 1a: Wave correction factor for 75-ohm line

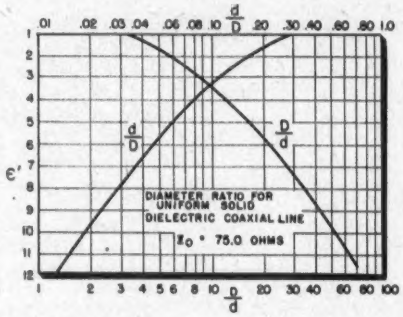

Fig. 2a: Diameter ratios 75-ohm coaxial line

By OWEN FIET
RCA Victor Div. Radio Corp. of America Camden, N.J.

W. E. DAY
L. H. Terpening Co. 16 W. 61 St. New York 23, N.Y.

J. GRIESMANN
Polytechnic Institute of Brooklyn Brooklyn, N.Y.

J. VOGELMAN
Rome Air Development Center Rome, N.Y.

THE RTMA Subcommittee on Air Dielectric Coaxial Transmission Lines (TR 9.11.2) is engaged in setting up a standard for tubing dimensions and tolerances for coaxial transmission lines of the rigid, gas filled type. These lines are to have electrically transparent supporting structures with a nominal iterative impedance of 50 ohms. See Table I. In the course of these activities it appeared desirable to specify frequency limits for the various sizes of coaxial transmission lines to be included in the standard. The problem of establishing frequency limits was turned over to the authors of this paper for their consideration. The problems considered were two-fold.

1. The determination of a set of criteria from which could be derived the frequency limits for the various sizes of transmission line.
2. Establishment of the actual frequency limits.

Criteria for Frequency Range

A uniform coaxial transmission line will transmit in the fundamental transverse electromagnetic (TEM) mode all frequencies. At the lower frequencies the characteristic impedance of the coaxial transmission line is no longer a function only of the inside diameter of the outer conductor and the outside diameter of the inner conductor. From a constant impedance point of view, it must be considered that the lower frequency limit falls somewhere in the very low radio frequency band and is determined by the deviation of the impedance of a finite length of the transmission line from the specified tolerance on the iterative impedance.

At the high frequency end the existence of higher order (waveguide) modes will produce apparent changes in the iterative impedance and will result in reflections of undesirable magnitude. For a uniform coaxial transmission line without any discontinuities or supporting structures, it would be possible to transmit the fundamental TEM mode at frequencies above the cutoff of the TE and TM waveguide modes. In this type of transmission line, if a pure TEM mode is excited at the input; it would be the only mode propagating as long as the transmission line had no perturbations which could excite the higher order waveguide modes. In actual practice, it is extremely difficult, if not improbable, to achieve a perfectly uniform transmission line. Accordingly, it is the desirable practice to set the upper frequency limit for TEM mode propagation at a frequency where all higher order modes are below cutoff, at least in the gas filled portion of the coaxial lines. The upper frequency limit of a coaxial transmission line is de-

Fig. 1: (l) Wave correction factor for 50-ohm line
Fig. 2: (r) Diameter ratios for 50-ohm coaxial line

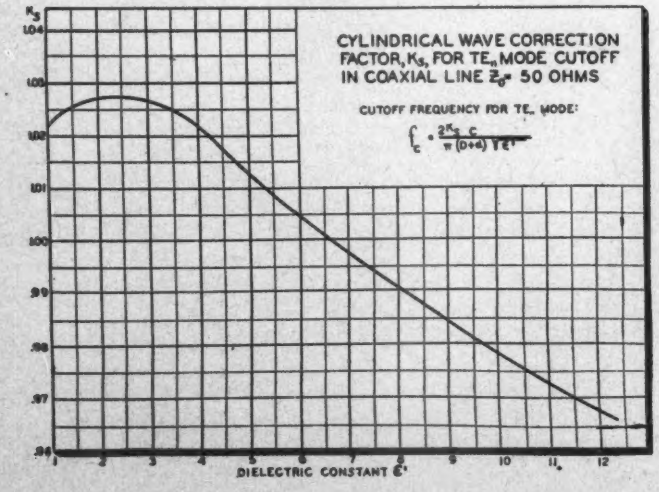
CYLINDRICAL WAVE CORRECTION FACTOR, Kₛ, FOR TE₁₁ MODE CUTOFF IN COAXIAL LINE Z₀ = 50 OHMS
CUTOFF FREQUENCY FOR TE₁₁ MODE:
DIELECTRIC CONSTANT ε'

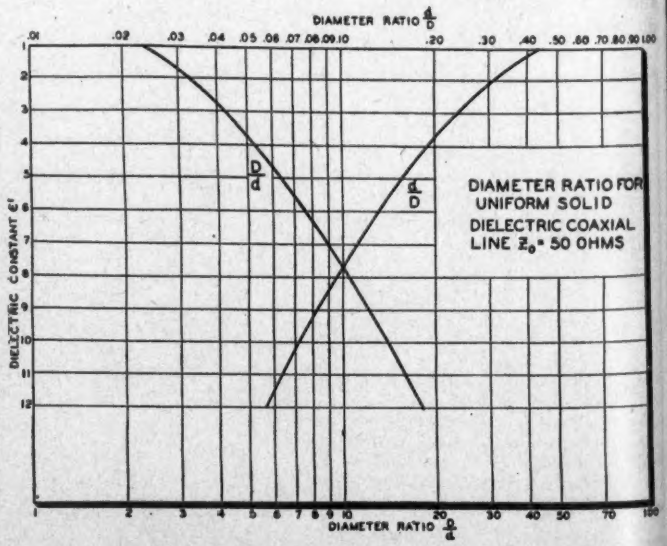

Coaxial Lines

termined by the cutoff frequency of the higher order waveguide modes of propagation since their existence will affect the impedance of the line and the transmission characteristics of the normally propagated TEM coaxial mode. The waveguide mode which has the lowest cutoff frequency is the TE_{11} mode; and, for most practical applications this cutoff frequency is the upper limit of operation of the coaxial transmission line. The presence of dielectric supporting structures requires that the

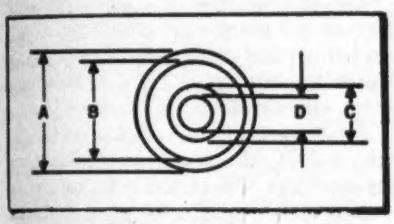

Cross-sectional coaxial line dimensions

dimensions of the inner and/or outer conductor be modified to maintain the impedance. Thus, the cutoff frequencies in the supporting structure will differ from that for the uniform air dielectric coaxial line. The cutoff frequency in the dielectric supporting structure will always be lower than that in the uniform gas filled region, since the known solid dielectrics have in general a relative dielectric constant much larger than that of air.

Cutoff Frequency

The TE_{11} mode cutoff frequency can be readily estimated from the mean circumference calculated from the outer conductor inside diameter and the inner conductor outside diameter by setting this value equal to one wavelength at the cutoff frequency. This will be in error by less than 3% for 50 ohm coaxial transmission line with insulating materials ordinarily utilized in high frequency operation. A small correction factor K_s, (see Fig. 1) applied to the cutoff frequency will give a result corresponding to the exact solution using cylindrical waves. The equations are given for the general case and for 50 ohm transmission lines. Figs. 1 and 2 will aid in the calculation of the cutoff frequency for most supporting structure dielectric materials.

For any uniform coaxial transmission line the cutoff frequency of the TE_{11} mode is given by:

$$f_c = \frac{2cK_s}{\sqrt{\epsilon'}\,\pi\,(D+d)} = \frac{7514\,K_s}{\sqrt{\epsilon'}\,(D+d)} \qquad (1)$$

and the impedance for air dielectric is:

$$Z_o = 138.16 \log_{10} (D+d) \qquad (2)$$

For a uniform air line as a func-

TABLE 1—Dimensions, Tolerances, Iterative Impedance and Cutoff Frequencies for Rigid Air Dielectric Coaxial Transmission Lines

OUTER CONDUCTOR					INNER CONDUCTOR				Z_o = 50 OHMS	
Line Size	A Dia.	B Dia.	Wall Thickness Nominal	Maximum Deviation From Average	C Dia.	D Dia.	Wall Thickness Nominal	Maximum Deviation From Average	Iterative Impedance (ohms) Nominal	Max. Min.
6-1/8	6.125 ±.008	5.981 ±.008	0.072	.012	2.600 ±.004	2.520 ±.004	0.040	.0075	50	50.15 49.82
3-1/8	3.125 ±.005	3.027 ±.005	0.049	.0075	1.315 ±.003	1.231 ±.003	0.042	.005	50	50.26 49.73
1-5/8	1.625 ±.003	1.527 ±.003	0.049	.005	0.664 ±.0025	0.588 ±.0025	0.038	.005	50	50.31 49.64
7/8	0.875 ±.0025	0.785 ±.0025	0.045	.005	0.431 ±.002	0.291 ±.002	0.025	.003	50	50.57 49.48
3/8	0.375 ±.002	0.285 ±.002	0.045	.0045	0.125 ±.002	----	Rod	----	50	50.83 48.07

TABLE 1A—Dimensions, Tolerances, Iterative Impedance and Cutoff Frequencies for Rigid Air Dielectric Coaxial Transmission Lines

OUTER CONDUCTOR					INNER CONDUCTOR				Z_o = 75 OHMS	
Line Size	A Dia.	B Dia.	Wall Thickness Nominal	Maximum Deviation From Average	C Dia.	D Dia.	Wall Thickness Nominal	Maximum Deviation From Average	Iterative Impedance (ohms) Nominal	Max. Min.
6-1/8	6.125 ±.008	5.981 ±.008	0.072	.012	1.716 ±.004	1.636 ±.004	0.040	.0075	75	75.14 74.70
3-1/8	3.125 ±.005	3.027 ±.005	0.049	.0075	.869 ±.003	.789 ±.003	0.040	.005	75	75.20 74.59
1-5/8	1.625 ±.003	1.527 ±.003	0.049	005	.438 ±.002	.362 ±.002	0.038	.005	75	75.27 74.49
7/8	0.875 ±.0025	0.785 ±.0025	0.045	.005	.226 ±.002	.176 ±.002	0.025	.003	75	75.53 74.09
3/8	0.375 ±.002	0.285 ±.002	0.045	.0045	.082 ±.001	-----	Rod	-----	75	75.74 73.43

Symbols Used in Mathematical Formulae

f	Operating frequency, mc
f_c	Cutoff frequency for TE_{11} mode, mc
c	Velocity of light in vacuum (2.99796/2.54) x 10^4 in./μsec.
ϵ'	Dielectric constant relative to vacuum
μ_o	Permeability of free space 4 x 10^{-7} h/m
D	Inside diameter of outer conductor of air (vacuum) line, in.
d	Outside diameter of inner conductor of air (vacuum) line, in.
K_s	Correction factor accounting for cylindrical wave boundary condition (based on Schelkunoff "Electromagnetic Waves," D. Van Nostrand Co., Inc. 1943, Fig. 8.51, P. 327 and Text, page 391)
D'	Inside diameter of overcut outer conductor, in.
d'	Outside diameter of undercut inner conductor, in.
δ	Depth of penetration, cm
ρ	Resistivity, ohm-cm
V	Voltage on transmission line
I	Current in transmission line
s	Distance along transmission line
Z	Series impedance per unit lengh
Y	Shunt admittance per unit length
γ	Propagation constant
Z_o	Characteristic or iterative impedance
Z_o'	Low frequency modified characteristic impedance
L_o	Inductance per unit length, h/cm
HΘ	Angularly directed component of magnetic field in the metal
H_o	Angularly directed component of magnetic field at the surface of the metal
r_o	Radius to an internal surface of the transmission line
Rs	Skin effect resistance in ohms (the d.c. resistance between the edges of a square plate of thickness equal to the depth of penetration)
r	A radius inside the metal having a value close to r_o
η_m	Intrinsic impedance of metal
v'	Velocity of propagation at very low radio frequencies

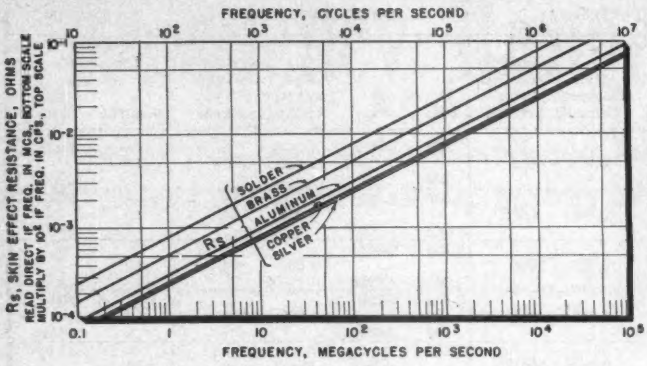

Fig. 3: Skin effect resistance-frequency characteristic

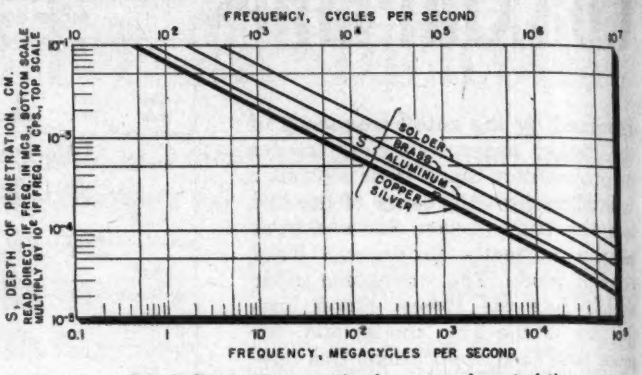

Fig. 4: Depth of penetration-frequency characteristic

tion of the outer conductor diameter and the impedance, Eq. (1) becomes:

$$f_c = \frac{2cK_s}{\pi D\,[1 + \log_{10}^{-1}(-Z_o/138)]} \quad (3)$$

$$= \frac{7514\ K_s}{D\,[1 + \log_{10}^{-1}(-Z_o/138)]}$$

For a uniform air line as a function of the inner conductor and the impedance Eq. (1) becomes:

$$f_c = \frac{2cK_s}{\pi d\,[1 + \log_{10}^{-1}(Z_o/138)]} \quad (4)$$

$$= \frac{7514\ K_s}{d\,[1 + \log_{10}^{-1}(Z_o/138)]}$$

For a constant impedance transmission line where the supporting structure is to be electrically transparent, it becomes necessary to modify the inner or outer conductor diameter to retain the nominal iterative impedance in the solid dielectric portion. The two most prevalent practices are either to enlarge the inner diameter of the outer conductor or to decrease the outer diameter of the inner conductor so that the impedance computed by the relationship given in Eq. (2) will remain constant. The first type is designated overcut transmission line and the latter is known as undercut transmission line. For these two specific cases the general relationships for the cutoff frequency can be obtained by proper manipulation of Eq. (1) and (2).

For the overcut transmission line the inner conductor remains fixed and the resultant inner diameter of the outer conductor, D', is obtained from the relationship:

$$D' = [\log_{10}^{-1}(Z_o\sqrt{\epsilon'}/138)]d \quad (5)$$

which gives the general equation for determining the cutoff frequency in terms of the inside diameter of the outer conductor of the air line:

$$_{oc}f_c = \frac{7514\ K_s}{\sqrt{\epsilon'}\,D\left[\log_{10}^{-1}\frac{Z_o}{138}(\sqrt{\epsilon'}-1) + \log_{10}^{-1}\left(\frac{-Z_o}{138}\right)\right]} \quad (6)$$

In terms of the outside diameter of the inner conductor of the air line, the cutoff frequency is given by:

(*Continued on page* 162)

TABLE II—Low Frequency Impedances and Cutoff Frequencies for TE_{11} Mode in Various Size Coaxial Lines and Insulator Supports; for Copper Conductors; Z_o 50 ohms

Line Size	Inner d OD"	Outer D ID"	D/d	TE_{11} MC Cutoff (Air Line)	TE_{11} MC Cutoff Undercut Teflon	TE_{11} MC Cutoff Overcut Teflon	TE_{11} MC Cutoff Undercut Polystyrene	TE_{11} MC Cutoff Overcut Polystyrene	Z'_o 0.1 mc	Z'_o 1.0 mc	v'/C 0.1 mc	v'/C 1.0 mc
3/8	.125	.285	2.28	18,800	14,387	9,895	13,422	8,175	52.80	50.90	0.9470	0.9827
7/8	.341	.785	2.302	6,818	5,223	3,593	4,873	2,968	51.05	50.33	0.9798	0.9935
1-5/8	.664	1.527	2.300	3,505	2,686	1,847	2,506	1,526	50.53	50.17	0.9895	0.9936
3-1/8	1.315	3.027	2.302	1,768	1,355	932	1,264	770	50.27	50.09	0.9947	0.9983
6-1/8	2.600	5.981	2.300	895	686	472	640	390	50.14	50.05	0.9973	0.9991

TABLE IIA—Low Frequency Impedances and Cutoff Frequencies for TE_{11} Mode in Various Size Coaxial Lines and Insulator Supports; for Copper Conductors; Z_o 75 ohms

Line Size	Inner d OD"	Outer D ID"	D/d	TE_{11} MC Cutoff (Air Line)	TE_{11} MC Cutoff Undercut Teflon	TE_{11} MC Cutoff Overcut Teflon	TE_{11} MC Cutoff Undercut Polystyrene	TE_{11} MC Cutoff Overcut Polystyrene	Z'_o 0.1 mc	Z'_o 1.0 mc	v'/C 0.1 mc	v'/C 1.0 mc
3/8	.032	.285	3.485	21,051	15,881	9,048	14,655	6,970	78.81	76.20	.9517	.9842
7/8	.226	.785	3.483	7,643	5,766	3,285	5,324	2,531	76.41	75.45	.9815	.9940
1-5/8	.438	1.527	3.486	3,929	2,964	1,689	2,737	1,301	75.72	75.225	.9904	.9970
3-1/8	.869	3.027	3.473	1,982	1,495	852	1,381	656	75.37	75.15	.9950	.9980
6-1/8	1.716	5.981	3.476	1,003	757	431	699	332	75.187	75.06	.9975	.9992

CONELRAD

FCC and Air Force plan controls station operation to prevent use of signals as navigational aid to enemy aircraft

THE FCC has formulated plans for the Control of Electromagnetic Radiation (CONELRAD) in the event of attack by enemy forces. Primary object of the plans, which have been approved by the Chairman of the National Security Resources Board and the Secretary of Defense, is to prevent the utilization of signals from broadcast stations in the U.S. as a navigational aid to enemy aircraft. Plan No. 1 covers the alerting of broadcast stations, and Plan No. 2 encompasses the controlled operation of these stations.

Under Plan No. 1, the U.S. is divided by the Air Defense Command (ADC) into three large areas known as Eastern, Central and Western Air Defense Forces. Each of these is broken down into smaller areas called Air Divisions, each Division, having an Air Defense Control Center (ADCC). See Fig. 1. Operationally, the plan is built around the various ADCC's.

Certain broadcast stations are designated as Basic Key Stations and Key Relay Stations. When conditions exist which justify the announcement of warning YELLOW or RED, at the discretion of the ADC, alerts will be issued by the ADCC's to all Basic Key Stations. The notifications will be passed on to the transmitter locations of Relay and other stations by telephone or, in certain instances, by radio broadcast, and will normally consist of prepared recordings. All stations subject to this plan must install and keep in readiness the equipment necessary to receive alerts and all clears.

Minimize Signals

The object of Plan No. 2 is to minimize the use of broadcast signals as navigational aids, and at the same time permit stations to be operated. Broadcast stations notified of an alert will be required, during the alert period, either to observe radio silence or follow operational procedures prescribed in Plan No. 2.

Under this plan, all FM and TV stations notified will be required to observe radio silence or will be permitted to operate in accordance with the prescribed procedures, will initially depend on the wishes of the station licensees. So far as practicable, the FCC will agree to these decisions. However, once these decisions are made, they are binding upon the stations, and stations participating in the CONELRAD operation may withdraw only upon 30 days' advance notice to the FCC.

Procedure During Alert

From the time of alert notification until the alert is ended, no broadcast station of any type will be permitted to make an on-air identification, unless specially authorized by the FCC. Those required to observe radio silence must leave the air immediately, except that before leaving the air they may broadcast an approved sign-off or civil defense message.

All stations permitted operation under Plan No. 2 will be on one or both of two frequencies, 640 kc and 1240 kc, during the alert period. The power ERP) allowed will not in any case exceed 10 kw, and usually will not be over 5 kw. Four different modes of operation are prescribed in the plan, one of which will be assigned by the FCC to each operating station. These are: sequential, on-off, pulsating and synchronous operation. See Fig. 2.

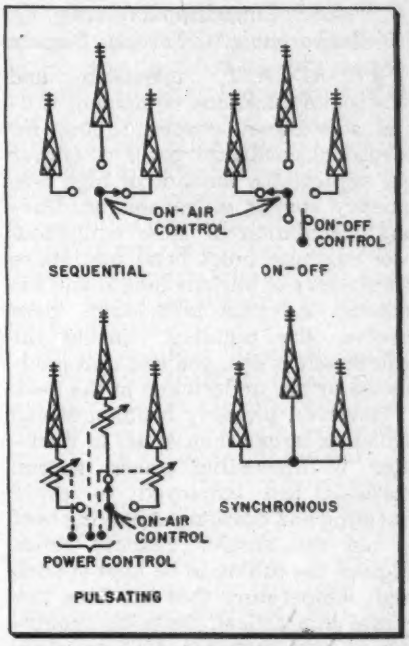

Fig. 2: Four modes of operating broadcast stations prevent guidance to enemy aircraft

Sequential Mode: In the sequential mode of operation, the FCC arranges two or more stations into a group, all using the same frequency, 640 kc or 1240 kc, or both. Power is

(*Continued on page* 160)

Fig. 1: Organizational structure of CONELRAD command plan from national to regional areas

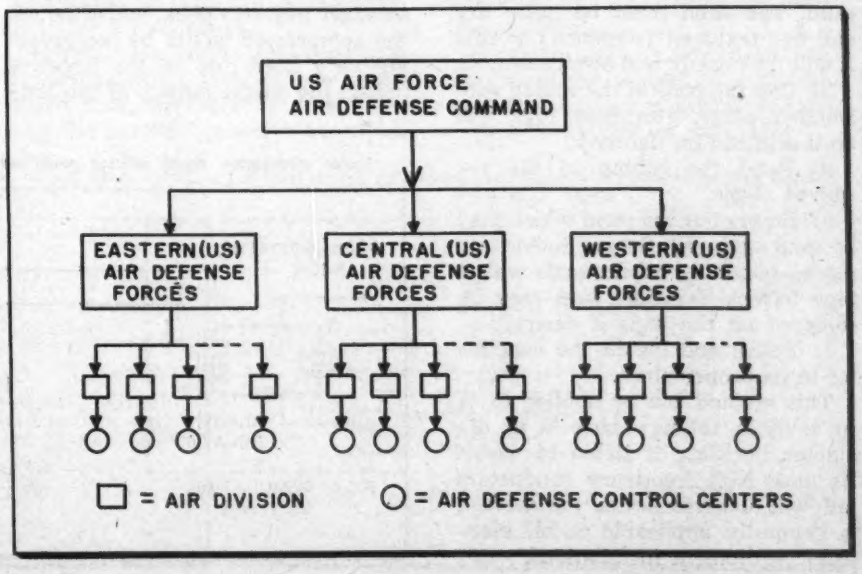
US AIR FORCE AIR DEFENSE COMMAND
EASTERN(US) AIR DEFENSE FORCES
CENTRAL(US) AIR DEFENSE FORCES
WESTERN(US) AIR DEFENSE FORCES
= AIR DIVISION
= AIR DEFENSE CONTROL CENTERS

CUES for BROADCASTERS

Practical ways of improving station operation and efficiency

Making Electrical Conductors In the Field

G. W. LEE, Consulting Engineer, 46 Roxborough St., Toronto, Canada

BROADCAST, television and communications equipment utilize soft-drawn copper tubing for electrical conductor paths whenever an appreciable amount of high frequency energy is transferred. During installation of such equipment the engineer must bend and shape conductors of various length and diameter. As new installation ideas evolve, the building housing the equipment is changed and unit modifications are undertaken in the field.

However, properly bending tubing which is larger than ¼ in. in diameter is impossible unless special methods are employed to avoid buckling and cracking. Applying heat is not the answer. Smooth bends require the tubing to be kept at such high temperature that handling becomes impractical. On a job requiring a large number of conductors different ways of tube shaping were tried until a successful one developed. This method consists of filling the tubing with fine, dry sand, capping it then bending same to requirements.

1) Take measurements between the terminals that the still-to-be made conductor will connect. Cut from a roll of tubing, a piece slightly longer than measurements to make sure of adequate length.

2) Fill the tubing with fine, dry sand. The sand must be quite dry and fine textured (screened) so that it will flow easily and also pack well.

3) Cap the ends of the tubing with wooden plugs, (terminal lugs will do if crimped on tightly.)

4) Bend the tubing to the required shape.

5) Empty out the sand which may be used again. Fit the conductor into place—trimming off the ends with a pipe cutter. Terminal lugs may be soldered on the ends if desired.

6) Polish and install the conductor in its proper place.

This method can be applied to ¼ in. to ¾ in. tubing; above ¾ in. diameter buckling is liable to occur. As most high frequency conductors fall within these limits, the method is generally applicable to all electronic equipment installations.

$$$ FOR YOUR IDEAS

Readers are invited to contribute their own suggestions which should be short and include photographs or rough sketches. Typewritten, double-spaced text is requested. Our usual rates will be paid for material used.

Under-Modulation Indicator

RONALD T. MIYAHIRA, Chief Engineer, KULA, Honolulu, T.H.

WE have a device that may help others faced with a problem similar to ours—that of maintaining a high percentage of modulation at all times.

We operate the highest powered station in Hawaii, and everyone expects us to be pounding into their receivers, although we are only a few db's above our competitors in actual power. Therefore our problem was to maintain the highest percentage of modulation possible at all times so that we actually sounded much louder than our competitors.

The easiest and best solution would be to have the operator keep a constant vigil on the modulation meter and ride gain on the program from the studios and tape machines, but this was impractical as the operator is constantly occupied with tape and disc recording jobs.

Furthermore even if the studio did send us a constant level, we would occasionally have a speaker with a stronger negative peak, and although the compressor would be compressing very hard due to the negative peaks, the actual output of the limiter would have a weak positive peak and our modulation meter would register about 50% when it should have been hitting 95 to 100%.

Our problem was to have an under-modulation indicator that would warn the operator when modulation peaks drop below 85% for more than ten seconds. (ten seconds is the interval between two successive peaks). Also, the system must be quiet and be able to warn the operator no matter where he was in the control room or how busy he was.

The first problem was solved by using a time delay relay in the warning circuit and the second by employing a 60-watt bulb. The bulb would light up the whole room, and the operator could not fail to miss the warning. To detect the undermodulation condition we employed the overmodulation alarm relay in our RCA modulation meter. We set the peak indicator on the front panel of the modulation meter to 85% so that it would indicate all peaks over 85%. By setting a high compression level in our limiting amplifier we had no difficulty with over-modulation.

When the modulation is below 85%, the alarm relay will not operate and relay 1 will be in a closed state. The bulb lights up and indicates an undermodulation condition. When a peak of 85% or higher is reached, the alarm relay closes and charges up the condensor. As the condensor charges almost instantly, relay 1 will be actuated and the bulb extinguished to indicate high percentage of modulation. The next peak may not reach 85% but the relay will remain in the energized con-

Under modulation meter utilizes peak indicating circuit of RCA modulation monitor

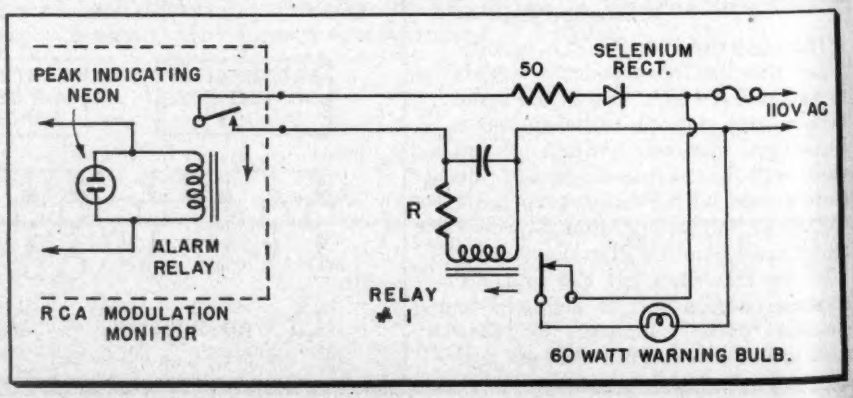

dition for 10 seconds during which time another peak will come by to recharge the condensor. The condensor will discharge slowly through resistor R and the relay to maintain the 10 seconds delay.

Under normal conditions the lamp will always be out except in certain types of music where the low passages are longer than the 10 seconds delay. Normal pauses in speech do not affect the relay. We found that too large a condensor was impractical as it took several consecutive peaks to charge it up to a point where it could actuate the relay and maintain the necessary delay.

A small capacitor with a large resistor works best but this in turn means that a very sensitive relay must be used. We used a 90 μf condensor and found that triggering was almost instantaneous. Since the installation of this device, we have found that our program level has been at a consistently high level of modulation.

Static Arc Discharges

ROBERT R. BREEDING, Chief Engineer, KGAR, Garden City, Kan.

BROADCASTERS in dry, dusty, and windy climates often have trouble with arcing in the final and antenna tuning units. This is caused by static charges that gather on the antenna, and are not properly discharged due to the dry conditions of the ground. The accompanying diagram shows a unit that will kill these r-f arcs without interrupting the normal broadcast.

The relay is a 6v. dc relay, shunted so that it operates at twice the normal plate current. The grid resistance is 200 times the grid leak resistance of the final amplifier of the transmitter.

This resistance need not be of high wattage since it is in the circuit less than a second. This unit does not affect the normal operation of the overload relay when it is needed. I have watched this unit in

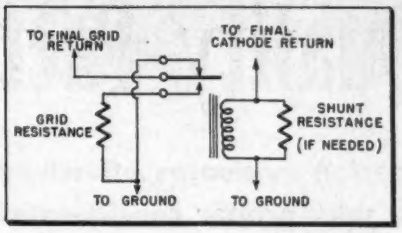

Static arcs controlled by plate damper

operation over a period of 3 months, and it has proved satisfactory. The only effect on broadcast quality is a slight bloop when the relay operates.

Battery-Operated Broadcast Loop Tester

LLEWELLYN JONES, Chief Engineer, WSBA, York, Pa.

IN an earlier issue (TELE-TECH, Jan. '51, page 38) I described an ac powered tone oscillator WSBA used for continuous monitoring of remote broadcast loops throughout the city. Since the ac units have been in operation, I have constructed simple, battery operated relaxation oscillators using NE-2 Neons and two Eveready, No. 467 67½-vs. radio batteries. The complete unit can be mounted in a small box, 5 x 4 x 4, with only the terminals and switch (optional) externally mounted. Using the values listed, the units have been operating for 8 months, 24 hours a day and still going strong. The circuit drain is about 50 μamps from the batteries.

The battery operated oscillator is ideal because it can be mounted close to the loop—no need to worry that ac power will be turned off or interrupted at any time. The engineer at WSBA studios can dial any remote line and, in a moment, know the condition of the loop. If tone isn't heard he calls the phone company for a loop check.

I have also used this generator for tracing audio lines on new patch board installations with great success. No external power is required.

Remote Mike Switch for Consoles

R. S. HOUSTON, 2921 North Woodstock, Philadelphia 32, Pa.

DESPITE the many advantages of having the announcer control his own mike, there are no consoles commercially built today that have the feature of a remote mike switch that may be extended into the studio where the announcer does not operate his own board. Such a switch was installed in one station without mutilating the internal wiring of the console, and gave, in addition to the mike control a talkback facility. The talk back was independent of any console control, so it permitted the announcer to talk to the operator at any time for emergency instructions without first having to signal the operator to put his mike on audition.

The air muting circuit consisted simply of a shorting arrangement connected across the mike socket, or the console input. Operation of the switch took the short off the mike to make it "live." There was an additional contact on the control switch connected in the speaker muting relay and cue light circuit to control these functions. For talk back, the mike input was connected to a high gain amplifier, which could be the audition amplifier. Any other talkbacks from other studios can be connected in parallel with this input. It is necessary only to insert a small resistance in series with the mike input to the console. This will upset the impedance match slightly, and if desired, the input impedance of the transformer in the console may be changed to accomodate this. The resistance recommended for the input circuit should be equal to the mike impedance. This will drop the level about three db, which is easily compensated.

In some stations where an audition amplifier is used in connection with the audition mixer on a console,

(*Continued on page* 110)

Neon relaxation oscillator for testing broadcast loops, or any other circuit requiring simple audio source

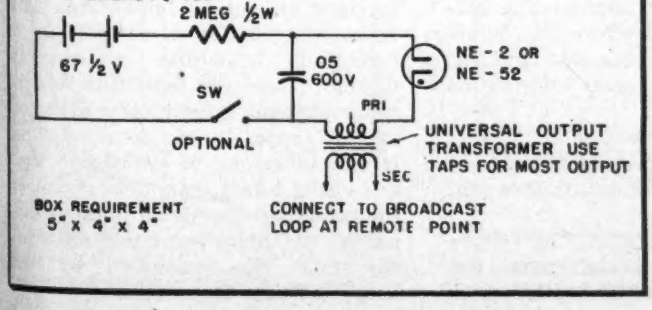

Simple remote microphone control switch for announcer also handles "talk back" circuit

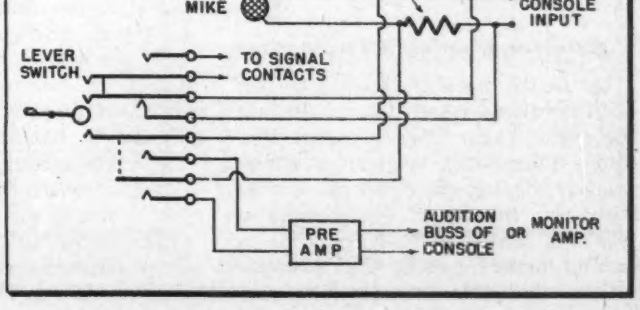

Quality Factor for Radar

Universally applicable criterion evaluates effectiveness of radar display systems. ception time now possible with proper consideration of functions of contrast ratio

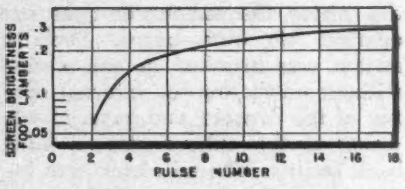

Fig. 1: Intensity buildup for successive pulses

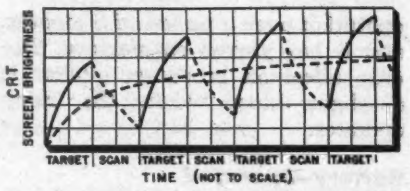

Fig. 2: Long time average brightness buildup

By A. F. BISCHOFF, Central Engineering Laboratory
General Electric Co., Schenectady, N. Y.

THE radar operator or pilot of an aircraft is generally interested in obtaining three-dimensional intelligence from the radar cathode-ray display; namely, target range, elevation and azimuth. In addition he may be interested in obtaining other specialized information such as range rate and closure time. The importance of presenting this information in an optical form which can be readily interpreted into desired action, cannot be over emphasized.

The ultimate value of any radar system is determined by its ability to furnish accurate information in a readily usable form. At the present state of the art, this information is presented to the pilot or radar operator on a CRT. The information presented may be used either for operational or supervisory purposes, but in either case the CRT forms a vital link. What can be seen on the tube, the length of time required to see, and the precision of the data derived from the observation, is to a large part determined by the particular radar system and the method of presentation. In designing new radar systems it is therefore well to consider the relative effectiveness of the CRT display as a function of the proposed system.

Relative Display Effectiveness

Up to the present time there has been no direct means for integrating the major radar system parameters into a quantitative expression of the relative display effectiveness. It was with the intent of establishing a formula which would provide a quality factor for radar CRT presentations that this investigation was undertaken. To arrive at such an expression it is necessary to consider those factors which determine what we see, and to derive corresponding radar systems parameters which express those factors quantitatively. Since the correlation between mechanical optical measurements and measurements on cathode-ray tubes has been well established by Williams, Bartlett, King[1] and others, much effort can be saved by taking advantage of the many thousands of measurements made in the mechanical optical field.

Mechanical Optics

In the field of mechanical optics Luckiesh[2] pointed out the four factors which determine what we see:

1. Actual brightness level of the object and its surroundings, particularly the background.
2. Contrast in brightness between the object and its background.
3. Size of object and distinguishing characteristics.
4. Time available for seeing.

In applying Luckiesh's four factors to radar CRT displays, it is necessary to investigate the specific display function which influences the parameters of the four factors. The following major display functions influence the ability to see and time required to obtain visual information from the display:

1. Pip brightness.
2. Background brightness.
3. Size of presentation area and size of pip.

Assigning values to the above three factors will determine the time required for perception and, ultimately, whether or not the pip or spot can be seen at all. Since in airborne radar, time is of the essence, it is desirable to evaluate the relative effects of the three variables on perception time so that time can be reduced to a minimum by the most advantageous design of radar indicator displays. Each of the three time determining factors will be treated separately in an effort to consolidate the contributing parameters and to derive an expression for the factor which can be incorporated in an equation expressing the display quality factor of a radar system.

Excitation Duty Cycle

Since the CRT phosphor is only energized when the antenna beam is on the target, the excitation duty cycle varies with the scan or frame time of the radar. The average brightness of the CRT or visual effect depends not only upon the number of hits per target but also upon the length of time elapsing between excitation periods and the decay characteristic of the particular phosphor used.

For an intermittent light source the Bunson-Roscoe law of optics states that if the product of light intensity and duration is held constant that the visual effect will be constant. Blondel and Rey found that this law held true over a range of light durations of 0.001 to 3 seconds. Baumgardt[3] showed that the relationship held for flash durations as short as 4 μsec. George E. Long[4] investigated the effect of duration time of onset and cessation of a light flash as it effects the optical signal received. He found that changes in the waveform of a light flash, within the limits of waveshape rectangular to triangular, do not affect the total amount of light energy required to produce an optical impression. The intensity variation of a CRT pip is essentially triangular in intensity waveform and pip repetition rate in radar systems is generally included in the range 4 μsec to 3 seconds. It can therefore be concluded that the visual effect or optical signal to the brain is proportional to the product of the intensity of the cathode-ray tube pip multiplied by the length of time it persists.

Cathode-Ray Tube Presentations

Improvement in per- and presentation size

Fig. 1 shows a typical intensity buildup curve for successive pulses on a P7 phosphor. Brightness was measured just before each excitation period. It will be noted that the screen brightness reaches a constant level after a finite number of excitations and that integration of subsequent pulses does not increase the intensity. This maximum brightness will be greater than that shown in Fig. 1 if the pulse repetition rate is increased or if the excitation is applied for a longer period of time, until saturation value for the CRT screen material is reached.

During the search period of a radar, target pulses are received in groups at pulse repetition rate, the groups being spaced by a scan period. Fig. 2 illustrates the increase in CRT average brightness with time. In the illustration four pulses excite the CRT during the "target" time, each increasing the brightness. During the scan period, the brightness decays until the next "target" period and succession of four exciting pulses which increases the average brightness to a new level. The successive groups of exciting pulses have a brightness buildup effect which becomes asymptotic to a constant value. Long time average brightness buildup is shown by the dashed line in Fig. 2.

The brightness of the CRT at any instant is equal to the summation of the exponentially changing brightnesses of all preceding excitation periods. The area under the brightness curve, Fig. 2, is the average light energy emitted by the phosphor.

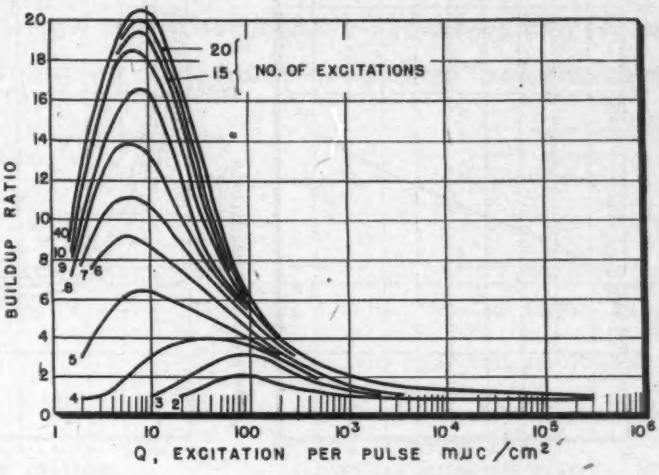

Fig. 6: Buildup gain as function of phosphor excitation per pulse (milli-micro-coulombs) for groups of pulses from 2 to 40, derived from empirical data. Note that little gain in buildup ratio is obtained between 20 and 40 pulses.

Decay Characteristic

Fig. 3 shows a typical decay characteristic for a P7 phosphor screen. This is the decay characteristic from screen saturation at 4000 volts accelerating potential and 3.0 μa of screen current per sq. cm. This curve has been approximated by four exponentials having the slopes of α_5, α_6, α_7, and α_8. The x's indicate the summation of these exponential curves at various points. The summation points closely approximate the decay curve.

The equations of the exponential curves have the form

$$Ae^{-\alpha t}$$

where A is the "Y" axis intercept or peak brightness and t is time after peak brightness.

Summing up the light contained under the four exponential curves of Fig. 3 shows that 66 foot-lambert-seconds of light is emitted during the first 120 seconds of phosphor decay and that, of this 58 F.L.S., or 88% is emitted during the first three seconds. Of the total three second energy, 98% is contained under the the single exponential curve, α_8, of Fig. 3.

For slow pulse repetition rates, of the order of two minutes, the maximum error involved when a single exponential approximation is used, is about 10%. For normal repetition

Fig. 3: Decay characteristic for P7 phosphor

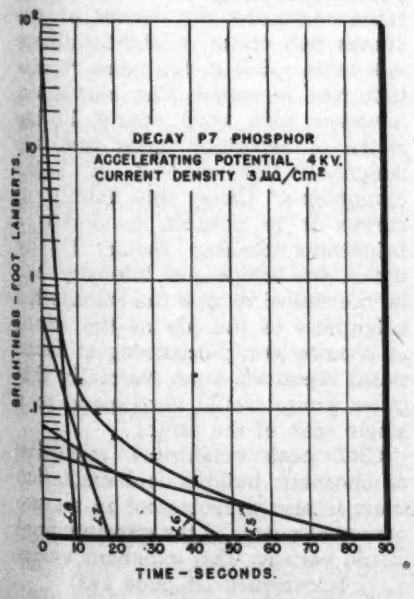

Fig. 4: Current density relative to brightness

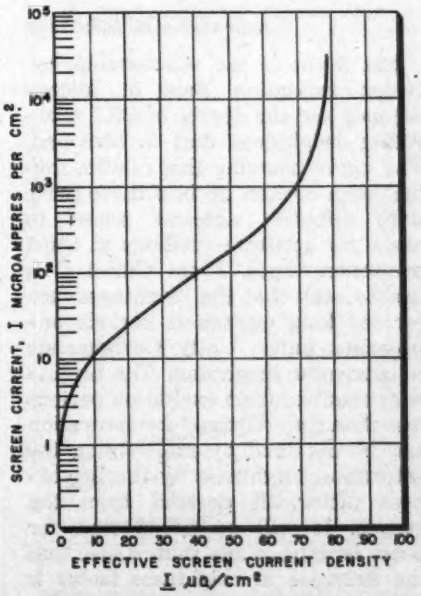

Fig. 5: CRT saturation brightness with time

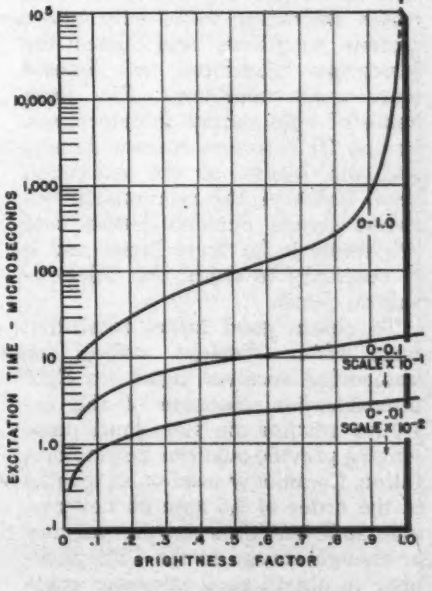

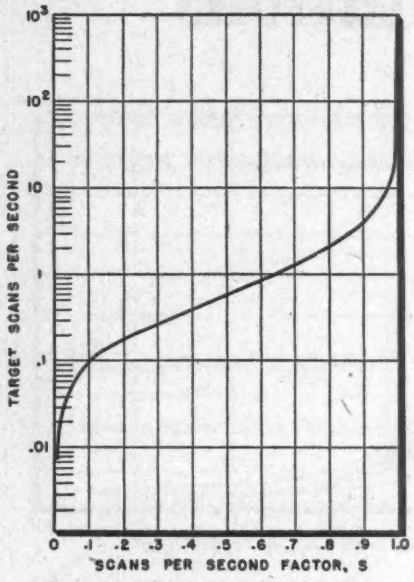

Fig. 7: Scan-light output characteristic

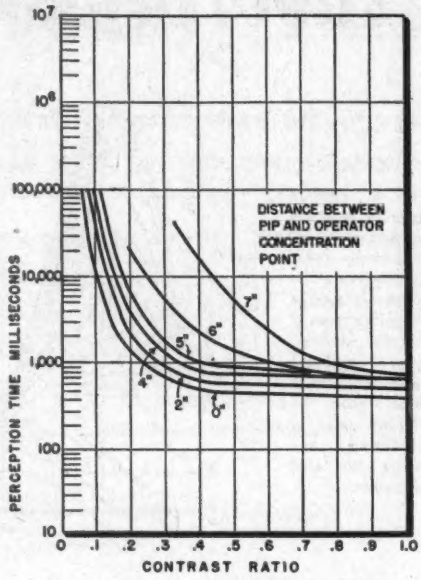

Fig. 8: Contrast-perception characteristic

rates, greater than one pulse every three seconds, the approximation introduces an error of only about 2%. It seems reasonable, therefore, to use the single exponential approximation.

Using this approximation and assuming a CRT anode potential of 4 kv and a screen current density of 3 μa/sq.cm., an equation for CRT brightness as a function of time, can be written.

$$\text{Brightness} = 60\, e^{-1.0t} \text{ foot lamberts (approx.)}$$

where t is the time after excitation was removed.

The integral of this equation between $t = 0$ and $t = \infty$ is 60 foot-lambert-seconds. This total light is for decay from CRT screen saturation value. Actually the screen will reach saturation value only under certain conditions and hence the maximum brightness will depend upon these conditions. The peak value of light output is determined by the CRT screen current density and the length of the excitation time. However the relationship between screen current density and brightness is far from linear and it is necessary to study this relationship in detail.

To obtain good target resolution most radar displays utilize the unmodified receiver signal for CRT intensification. Because of the resulting smaller pip size, short pulse lengths provide superior target resolution. Commonly used pulse lengths of the order of 0.5 μsec do not provide sufficient time for the delivery of enough energy to the CRT phosphor to obtain good phosphor excitation even at the high CRT screen current densities that can be obtained.

Increasing the CRT screen current density to compensate for extremely short excitation periods will not produce a linear increase in brightness. The linear relationship between CRT screen current density and brightness does not continue as the screen current becomes very large. Fig. 4 shows the actual CRT current density in μa/sq.cm. plotted against the effectiveness of this screen current density in producing CRT brightness. The curve is fairly linear between the limits of 1 and 10 μa/sq.cm., but above 10 μa it requires a thousand fold increase in screen current density to obtain an eight fold increase in brightness.

Saturation Brightness

Fig. 5 shows the relationship between excitation time in microseconds and the degree of CRT saturation brightness that is obtained. The curve showing this relationship has been broken up into three parts with different abscissa scales to allow for accurate readings at short excitation times. From Curve C it can be seen that the brightness factor for long excitation periods approaches unity. Unity Corresponds to saturation brightness. The brightness obtained from excitation periods less than that required for saturation can be obtained by multiplying the saturation brightness by the brightness factor, F, derived from the curves. It will be noted that for pulse lengths of less than 2 μsec that the decrease in brightness factor is more rapid than the decrease in excitation time. This lack of linearity is due to the fact that the CRT phosphor has a threshold value of energy needed for excitation, brightness is meager until this threshold is exceeded and then brightness increases superproportionally.

Soller, Starr, and Valley[5] working at MIT were the first to publish data indicating that the energy of successive excitations had a cumulative effect on brightness. They termed the brightness increase due to a succession of excitations over that for a single excitation, "buildup ratio." Because of the threshold characteristics of the phosphor, it becomes obvious that the buildup ratio is a function of the amount of energy per excitation. The amount of energy per excitation, or charge, Q, placed upon the phosphor can be expressed quantitatively in units of milli-micro-coulombs per sq. cm. The amount of energy per excitation, expressed in these units, can be found by multiplying the CRT screen current density expressed in ma/sq. cm., I, by the duration of the exciting pulse in microsecond t_e.

Family of Curves

To show the relationship that exists between charge per excitation and buildup ratio the curves in Fig. 6 were drawn from empirical data. This family of curves shows the buildup gain obtained as a function of the phosphor excitation per pulse, expressed in milli-micro-coulombs per sq. cm., for groups of pulses from 2 to 40. It will be noted that little gain in buildup ratio is obtained between 20 and 40 pulses, and that 40 pulses represents the saturation level for pulse buildup for pulses occurring at normal radar rates. Actually the crests of the curves will occur at slightly different values of Q as the pulse repetition rate is varied. The curves do, however, give good results in the range of repetition rates that are commonly encountered in radar equipments. Using this family of curves it is possible to derive a brightness buildup factor, B, by which the single pip intensity can be multiplied to give the cumulative brightness of the pip as the result of a pulse group occurring at radar pulse repetition rate. Normally this pulse group would correspond to a single scan of the target.

CRT peak brightness, exclusive of phosphor buildup and excitation time, is also proportional to an exponential power of the effective final anode voltage. This exponent varies

(*Continued on page* 142)

Frequency Feedback

A dynamic concept applied to ac circuitry. How to use saturable r-f reactors and ferroelectric capacitors in resonance systems having amplitude-frequency relationships

By HANS E. HOLLMANN
U.S.N. Air Missile Test Center
Point Mugu, Calif.

As a rule, feedback is applied to currents or voltages in order to make an electric network unstable or to render it more stable and more linear by means of positive or negative feedback, respectively. The concept of feedback, however, may be extended to other electrical parameters, the most immediate being frequency, to produce a positive or negative frequency feedback.

Frequency feedback may be achieved either by means of an external feedback channel or by internal feedback in a nonharmonic resonant system, that is a system wherein the energy reservoirs are not constant but vary in time. Consequently, frequency feedback manifests itself in the form of nonharmonic resonance curves.

External Feedback Channel

As an introduction, the principle of frequency feedback may be illustrated by an external feedback channel as shown in Fig. 1. A parallel resonant circuit consisting of the inductance L_o and the capacitance C_o is excited by a signal generator with constant current and variable frequency. In addition, the tank circuit is paralleled by the frequency modulator M, e.g., a reactance tube. Moreover, an envelope detector D rectifies the induced r-f voltage $\hat{V}\sim$ and thus produces the control voltage V_c. The feedback loop is closed in that V_c is impressed upon the input terminals of M.

For simplicity, let us assume that the modulator capacity C_m increases proportionally to V_c and that the diode may have 100% efficiency, i.e., V_c may be equal to the peak values $\hat{V}\sim$. We therefore write $C_m = KV_c = 1K\hat{V}\sim$ where K denotes the sensitivity of the modulator. The angular frequency of the tank circuit is $\omega = \omega_o/\sqrt{1+C_m/C_o}$ where ω_o is the resonant frequency of the original tank circuit without the modulator, or at $V_c = \hat{V}\sim \to 0$. The combined equations then give

$$\omega = \frac{\omega_o}{\sqrt{1+(K\hat{V}\sim/C_o)}} \qquad (1)$$

so that the frequency deviation from ω_o, the detuning owing to the feedback becomes

$$x_f = (\omega/\omega_o)^2 - 1 = -K\hat{V}\sim/C_o \qquad (2a)$$

or multiplied with the quality factor Q

$$Qx_f = -A\hat{V}\sim \qquad (2b)$$

where A stands for QK/C_o. Even though Q depends on the frequency and therefore on the detuning, no great error occurs if the quality factor is considered to be constant, particularly when we confine ourselves to $x_f \gg 1$.

Under the influence of an increasing feedback voltage V_c, the modulator capacity increases and the entire resonant curve shifts toward lower frequencies. Consequently, if the oscillator frequency f_{gen} is increased so that it approaches resonance, the resonant curve shifts toward f_{gen} that means, the resonance of the tank circuit automatically approaches the generator frequency and a positive frequency feedback may be recognized. Inversely, if the generator frequency approaches the tank resonance in the direction from higher to lower values, the resonant

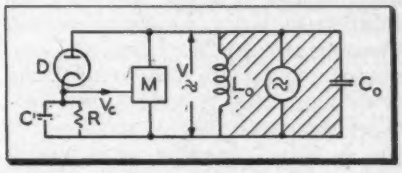

Fig. 1: External frequency feedback channel

curve runs away and the frequency feedback is negative.

The feedback action is explained in detail by means of Fig. 2. The dotted lines are the feedback lines originating at various independent variables Qx and having the slope $-1/A$. The resonant curve of a harmonic resonant circuit is expressed in terms of

$$V\sim = V_{res}/\sqrt{1+(Qx_o)^2} \qquad (3)$$

yielding, for three values of the r-f excitation characterized by three resonance voltages V_{res}, the three dashed curves. The feedback lines intersect these resonance curves at the values $Qx_o = Qx - \Delta Qx$, where ΔQx denotes the shifting of the new curves. Because the explicit evaluation of these new resonance curves in terms of $V\sim = f(Qx)$ results in an equation of higher order, it is simpler to evaluate $Qx = f(V\sim)$ so that we obtain

$$Qx = A\hat{V}\sim + \sqrt{(V_{res}/V\sim)^2 - 1} \qquad (4)$$

There are three important phe-

Fig. 2: Transformation of resonance (dashed) to nonharmonic (solid) curves by feedback (dotted)

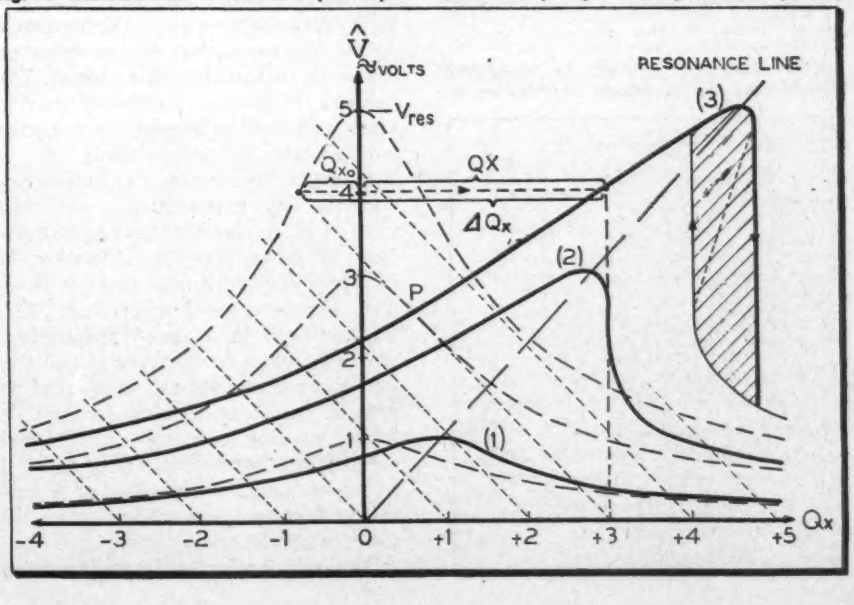

FREQUENCY FEEDBACK (Continued)

nomena that can be seen at a glance.

First, the resonance maximum, under the influence of frequency feedback, shifts from the original value zero to $Qx_{res} = AV_{res}$, and therefore follows the resonant line. Because of $V \rightarrow 0$, the lower portions of the new resonance curves coincide with the harmonic curves, consequently the "nonharmonic" resonance curves are unsymmetrically deformed. The "higher" branches, more accurately the branches over $Qx > Qx_{res}$, become increasingly steep at the expense of the opposite branches over $Qx < Qx_{res}$. In terms of feedback terminology, we may say that the frequency feedback is positive above resonance and negative below.

Critical Case

Second, Fig. 2 reveals a critical case at which a small section of the higher branch becomes vertical. This critical case is characterized by the fact that the slope of the feedback line equals the maximum slope of a resonant curve at its point of inflection, in the present example of the dashed curve at $V_{res} = 3$ volts. Because the maximum slope of the standardized resonance curves amounts to $0.385\ V_{res}$, the critical case occurs at the resonant voltage $V_{res} = 2.6/A$.

Third, at higher resonance voltages the higher branch assumes a negative slope (curve 3). The system becomes unstable in that the r-f voltage describes a tuning loop.

Without any further explanation, it can easily be seen that the picture reverses when the slope of the feedback line reverses its sign which is, when the modulator capacity decreases with increasing feedback voltage, for example, if the polarity of the diode D in Fig. 1 is reversed. The frequency feedback then is positive at frequencies below and negative at frequencies above resonance.

Fig. 3: Frequency feedback by ferroelectric capacitor (a) and dc voltage amplification (b)

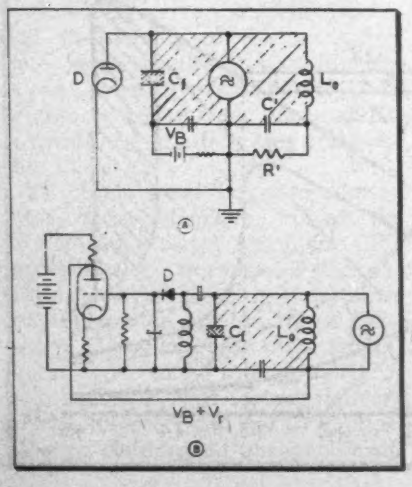

The external modulator in Fig. 1 may be replaced with an internal modulator in that the tank circuit contains either a saturable r-f reactor or a ferroelectric capacitor. In both cases, the dynamic reactance and therefore the tank frequency depends on the magnetization or polarization, in other words, on a control current or a control voltage, respectively. The ferroelectric condenser C_f in Fig. 3(a) is charged directly by the diode D whereas the voltage V_B acts as bias. The degree of frequency feedback can be increased by introducing a multistage amplifier into the feedback loop. Thus, the circuit diagrammed in Fig. 3(b) exhibits a sensitive frequency feedback because a vacuum tube amplifies the detector voltage while the plate battery, at the same time, produces the necessary bias.

Fig. 4 illustrates examples of nonharmonic resonance curves taken with the aid of a sweep generator and a barium strontium titanate condenser. At low r-f excitation, resonance occurs at ω_o (oscillogram a). The following two oscillograms show not only the shifting of the resonance maximum toward higher frequencies but also reveal (b) the critical condition of operation and (c) the instability.

Internal Frequency Feedback

The external frequency-feedback channel is to be taken primarily as a means of explaining the principle. A disadvantage of external feedback is the time constant of the filtering network in the detector circuit. Internal frequency feedback avoids such a limitation because it operates solely under the influence of r-f.

Internal frequency feedback occurs in any nonharmonic resonant system at strong excitation, regardless whether the nonlinearity is caused by a saturable reactor (Fig. 5a), a ferroelectric capacitor (Fig. 5b), or both in proper combination, and regardless of whether or not the nonlinear elements are subjected to a bias. In order to gain an insight into the phenomenon of internal frequency feedback, it will be helpful to review some pecularities of ferromagnetics, and ferroelectrics under various conditions of operation.

The philosophy of ferromagnetics is very complex and that of ferroelectrics is not even fully developed. Therefore we can improve our knowledge only through the analogy between ferroelectricity and ferromagnetism. Nevertheless, the complexities become evident if we recall the various types of permeability such as the initial, the reversible, the incremental, the apparent or effective, and even the complex permeability which lead to similar types of permitivity. The discussion, under a common point of view, is facilitated if we combine both terms

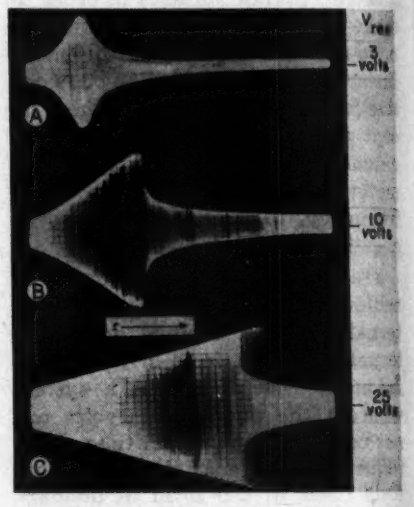

Fig. 4: With increasing r-f excitation, harmonic curve (a) assumes the critical form (b) and then becomes unstable as is shown by (c)

in speaking of "permeativity" (μ,ϵ) whereby we keep in mind that we mean $\mu = B/H$ or $\Delta B/\Delta H$ as well as D/E or $\Delta D/\Delta E$ where B and D is the magnetic or electric flux, respectively, and H or E the magnetic or electric polarization.

The philosophy of our permeativity, under the influence of biasing and superimposed alternating fields, may be derived from magnetic as well as dielectric hysteretic loops. Right from the start, we confine ourselves to an average or dynamic permeativity that means to a permeativity only for the fundamental frequency but we neglect the hysteretic losses as well as the harmonic distortions.

Polarization Characteristic

With these restrictions in mind, let us consider Figs. 6(a) and (b). Fig. (a) shows a polarization characteristic with various minor hysteretic loops resulting from an ac field superimposed upon different biasing polarizations. In other words, the test specimen is driven at various quiescent points of operation. The slope of the major axis denotes the

incremental permeativity $(\mu, \varepsilon)\Delta$. It can easily be seen that this value not only decreases with increasing bias but, at the same time, increases with increasing ac amplitudes. As a result, the dynamic inductance of a saturable reactor and the dynamic capacitance of a ferroelectric capacitor changes when the elements are subjected to different biasing as well as ac polarizations.

R-F Reduction Effects

When the r-f excitation is reduced, the incremental permeativity asymptotically approaches the reversible values $(\mu,\varepsilon)_r$. Note that variations of the bias and varying r-f amplitudes produce opposite effects.

Numerous tests with nonlinear specimens of both types confirmed these results to a certain degree. At large ac fields, the incremental permeativity decreases because it suffers a peculiar rectification. An extreme, namely a specimen excited by increasing r-f fields with no bias present, is depicted in Fig. 6(b). Recalling the definition of the dynamic permeativity, we see the slope of the major axis of the different hysteresis loops first increase a little but then decrease as soon as the peaks run into the regions of saturation. An alternate explanation is that the permeativity suffers saturation during part of the cycle thus reducing the effective value. Fig. 6(c) illustrates the case wherein the specimen

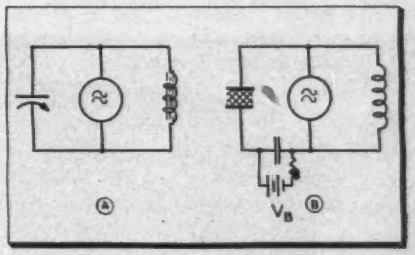

Fig. 5: Nonharmonic resonance circuits using iron-core inductance (a) and capacitor (b)

is subjected to a constant bias with increasing r-f polarization superposed. Without going into details, the small increase of the permeativity and the subsequent decrease of the dynamic value can easily be seen by combining the Figs. 6 (a) and (b).

(*Continued on page* 126)

PRECISION TRANSISTOR OSCILLATOR

Peter G. Sulzer at the National Bureau of Standards has recently developed a crystal oscillator that is small, portable, dependable, and accurate over long periods of time. The new unit, utilizes a junction transistor as the source of driving power for a high-stability quartz crystal unit. All components of the circuit, including the power supply, fit into a metal tube less than 2 in. in diameter and about 7 in. long. At an operating frequency of 100 kc, the long-period drift in the first model was about 3 parts in 109 per day.

The major components of the transistor oscillator are a type 2517 junction transistor, a high-precision 100 kc GT-cut quartz crystal unit,[1] and a long-life mercury cell. The dry cell supplies power to the whole unit (1.35 volts at 100 microamperes), and has an active life, under these conditions, of five or more years.

Two of the requirements that must be met in developing a high-stability crystal oscillator are constancy of phase shift in the feedback loop associated with the crystal and constancy of the amplitude of oscillation. A constant phase shift is obtained by using large, stable "swamping" capacitors at both crystal connections and by using highly stable components in the remainder of the circuit. Excellent amplitude stability is achieved by operating the transistor in such a manner that collector-voltage limiting is produced.

The transistor is used in the grounded-emitter connection. It produces an output of 0.8 volt across a tuned circuit connected to the collector electrode. The tank circuit, composed of a 350 μμf capacitor and a 6 mh coil, is designed to oscillate at 100 kc; however, the magnitude of the voltage is too high to be applied directly to the crystal unit. Consequently, the voltage is reduced by means of an attenuator, which consists of a 40 μμf and a 0.01 μf capacitor in series from the collector electrode to ground. The driving current (less than 100 microamperes) for the crystal is taken from the junction between these capacitors. The crystal voltage is coupled to the output through a 100 μμf capacitor.

Crystal Mounting

Over half of the space in the 1¾-in. diameter by 7-in. metal tube is consumed by the crystal, which is mounted in an evacuated glass envelope. The transistor, coil, capacitors, and resistors are supported on a bakelite frame that may be "potted" in casting resin to add to the rigidity of the section. The mercury cell, only about one-half inch deep, is at the base of the assembly and is insulated from the metal "can" by a bakelite shield.

(*Continued on page* 145)

Fig. 1: (below left) Exploded view and circuit diagram of the new transistor oscillator developed by the National Bureau of Standards. This new oscillator fits into a metal tube less than 2 inches in diameter and about 7 inches long. A Mercury cell (right), with a life of about 5 years, supplies all the power to the unit—1.35 volts at 100 microamperes. The circuit components, including the transistor, are lumped together in a bakelite form (center), which may be "potted" in a casting resin for greater rigidity'. The GT-cut quartz unit is placed in an evacuated envelope (left). The new oscillator has a short-time stability of about 3 parts in 1010 and a long-time accuracy (per 24 hour day) of 3 parts in 109. The schematic diagram below the exploded view shows the various resistor, capacitor, and inductive components of the transistor oscillator.

Fig. 2: (below right) Basic components of the new transistor oscillator developed by the National Bureau of Standards. The driving power for the unit is obtained from a type 2517 junction transistor (left). This power is applied to a precise GT-cut quartz crystal unit, which is enclosed in an evacuated glass envelope (right). The new oscillator has a short-time stability of about 3 parts in 1010. The complete unit is enclosed in a tube 1-¾ inches in diameter and 7 inches long, which includes the power supply for all the components.

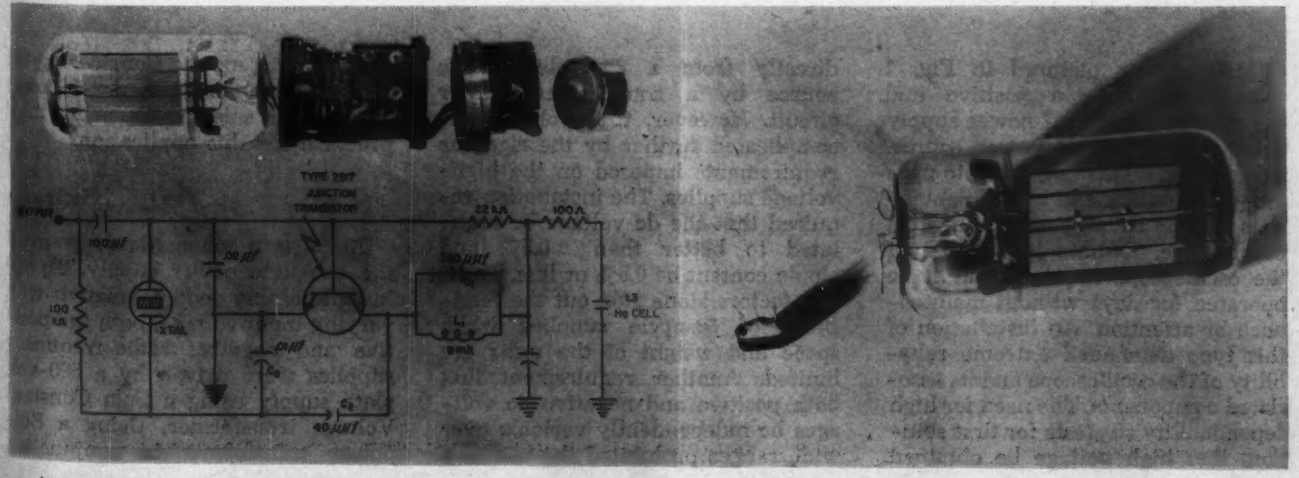

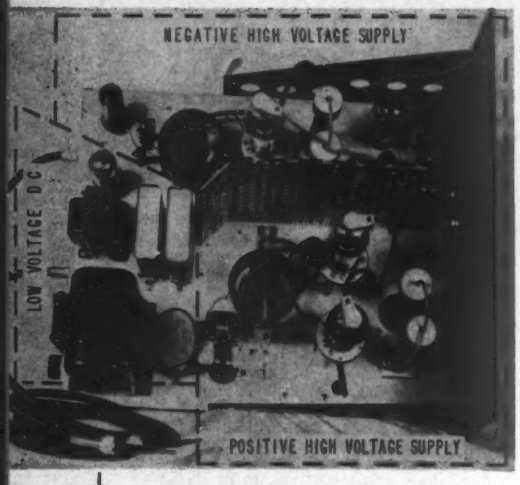

Positive and Negative

Dual r-f power supplies mounted on single chassis provide 20 to 30 kv and −4 to −10 kv for oscilloscope crt. Excellent ±0.5% dc regulation as ac line varies from 90-130 volts

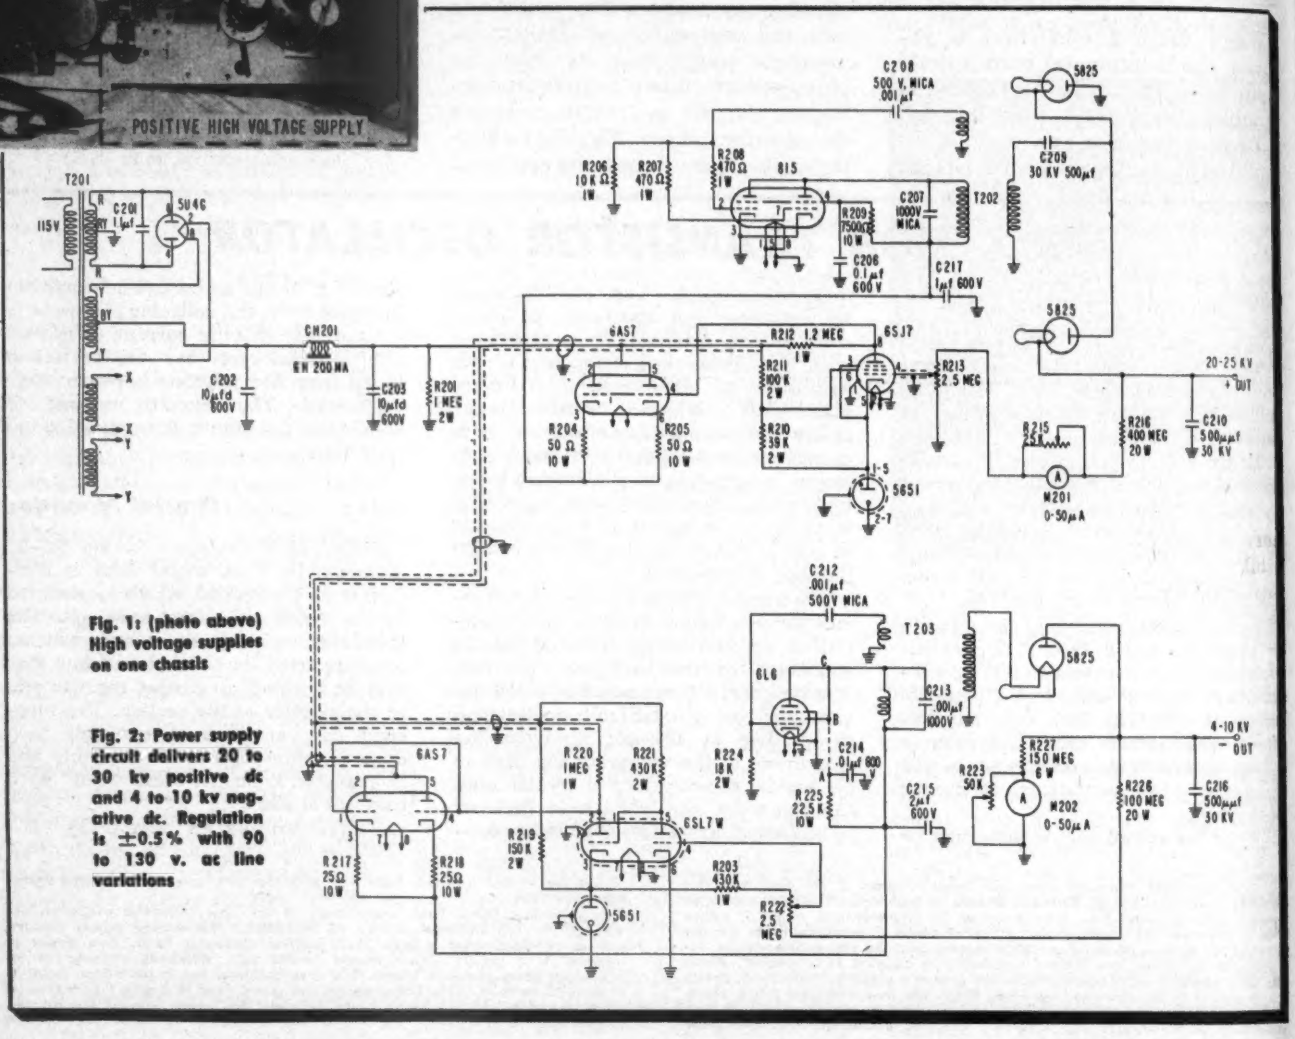

Fig. 1: (photo above) High voltage supplies on one chassis

Fig. 2: Power supply circuit delivers 20 to 30 kv positive dc and 4 to 10 kv negative dc. Regulation is ±0.5% with 90 to 130 v. ac line variations

THE chassis pictured in Fig. 1 contains both a positive and negative regulated r-f power supply using a common dc power source. The dual unit was developed to provide accelerating and cathode potentials for the cathode-ray tube of an oscilloscope. Remote installation of the oscilloscope required that it be operated for days without maintenance or attention. An installation of this type demanded extreme reliability of the oscilloscope and its associated components. The need for high dependability suggests for first solution, that high voltage be obtained directly from a 60-cycle voltage source by a transformer-rectifier circuit. However, the problem was complicated further by the rigorous requirements imposed on the high-voltage supplies. The installation required that the dc voltage be regulated to better than ±0.5% and ripple content be 0.5% or less. These two factors alone rule out the feasibility of 60-cycle supplies when space and weight of the units are limited. Another requirement that both positive and negative dc voltages be independently variable over wide ranges prohibited the use of a single power supply. Considering the requirements imposed, a r-f power supply was selected as being most practical for this application.

Circuit

Fig. 2 is a schematic diagram of the complete power supply. To aid in maintaining good regulation with varying input voltage, both the positive and negative radio-frequency supplies were driven by a 500-volt plate supply using a Sola Constant Voltage transformer. Using a Sola power transformer in conjunction

High Voltage Supply

with a voltage-regulating network made it possible to maintain ±0.5% dc voltage regulation with ac line voltages from 90 to 130v. The positive HV supply provides an output range of 20 to 30 kv dc. This supply consists of a type 815 tube, both sections operated in parallel as a reverse feedback oscillator, and a r-f step-up transformer with voltage-doubler rectifiers. Oscillator plate voltage is regulated by controlling a type 6AS7 tube in series with the oscillator power supply. A type 5651 voltage-reference tube provides a fixed voltage reference to a type 6SJ7 control amplifier tube. The 5651 is an excellent voltage reference if its current is maintained between rather close limits. This tube exhibits much less hysteresis than the conventional voltage regulator, such as, the type OC3/VR105. This means that the actual voltage across the tube varies a minimum between successive on and off operations.

The negative power supply has an oscillator and r-f transformer similar to the positive supply except that here a type 6L6 tube is used as the oscillator and a half-wave rectifier provides negative voltage from −4 to −10 kv in two ranges. Connecting the 6L6 as a pentode covers a range of −5 to −10 kv and by connecting the 6L6 as a triode, the regulation range is shifted to −4 to −6 kv. Plate voltage of the oscillator is regulated with a type 6AS7 tube in series with the plate-supply voltage. Two stages of amplification through a type 6SL7 tube provides the correct polarity for regulation of the 6AS7 with high sensitivity. A type 5651 voltage-reference tube serves a dual purpose: to raise the gain of the error voltage as well as to provide a reference voltage, by connecting the ground end of the negative supply to this tube. This connection permits sampling the error voltage at a higher potential above ground and hence, samples a larger percentage of the error voltage which appears across the dc output. The high gain resulting from cascading the two halves of the 6SL7 requires that extra care be taken in shielding and positioning of wiring to prevent oscillation in the control circuit.

Robinson Van Allen

By GEORGE ROBINSON & ROLAND VAN ALLEN
Naval Research Laboratory
Washington 20, D. C.

Performance

Load regulation curves for the two supplies are shown in Fig. 3. Regulation of the negative supply was made considerably better than that of the positive supply, since the former provided the potentials for the gun structure of the CRT. The extent of control on regulation is shown by the "plateau" or flat portion of the curves. The width of this "plateau" is limited by the range of plate voltage available to the oscillator tubes. Increasing or decreasing the input ac voltage has the effect of increasing or decreasing the width of the "plateau." Using a Sola transformer in the oscillator plate power supply minimized this effect.

A test of regulation under conditions of 120°F and 90% relative humidity showed that ±0.5% regulation could be maintained under constant conditions. However, the positive voltage changed +1.3% and the negative voltage changed +0.5% in raising the ambient temperature from 75°F to 120°F since no attempt was made to make the circuit temperature compensating.

Design

Mautner and Schade[1] have outlined the procedure for the design of r-f transformers used in r-f power supplies. This paper is very valuable in view of the fact that most available literature on coupled-circuits theory is not readily adaptable to an application of this kind.

The secondary high-voltage coil design for the positive power supply was also used in the negative supply with satisfactory results; the production problem was simplified by using a single type. Although the same secondary coil was used in both supplies, the resonant frequencies of the two oscillators were not the same since the capacitance presented by the rectifying circuit was different in each case. The resonant frequency of the negative-supply oscillator was approximately 220 kc while that of the positive-supply oscillator was approximately 190 kc. The difference in the resonant frequencies of the two oscillators, plus the placement of a metal screen between the units, prevented any interaction due to the proximity of the two tank circuits on a single chassis. In this particular design the type 5825 rectifier tubes were used to achieve good reliability. The 5825 has a peak inverse voltage rating that is twice that of the type 1B3GT so that rectifier tube failure was

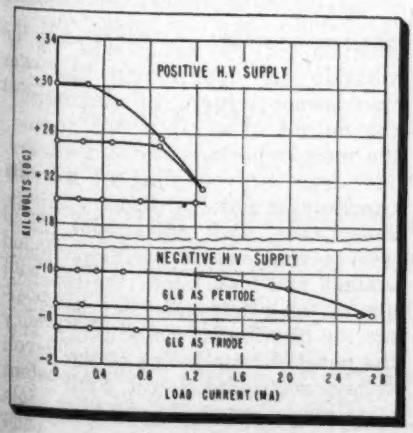

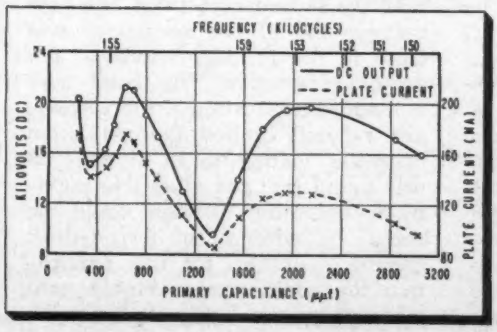

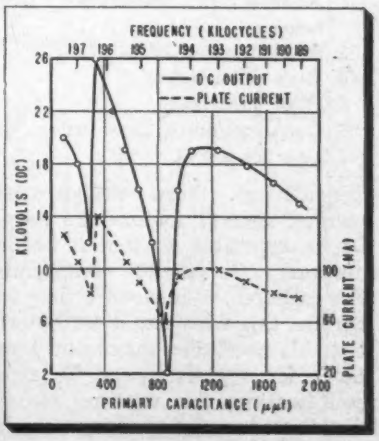

Fig. 3: (1) Load regulation of pos. & neg. supplies Fig. 4: (c) Output at L_{pri}=0.21 mh; L_{sec}=44.4 mh; K=0.265; E_{osc}=350 v; 125 meg load. Fig. 5: Output with r-f transformer, L_{sec}=31 mh; others same as 4

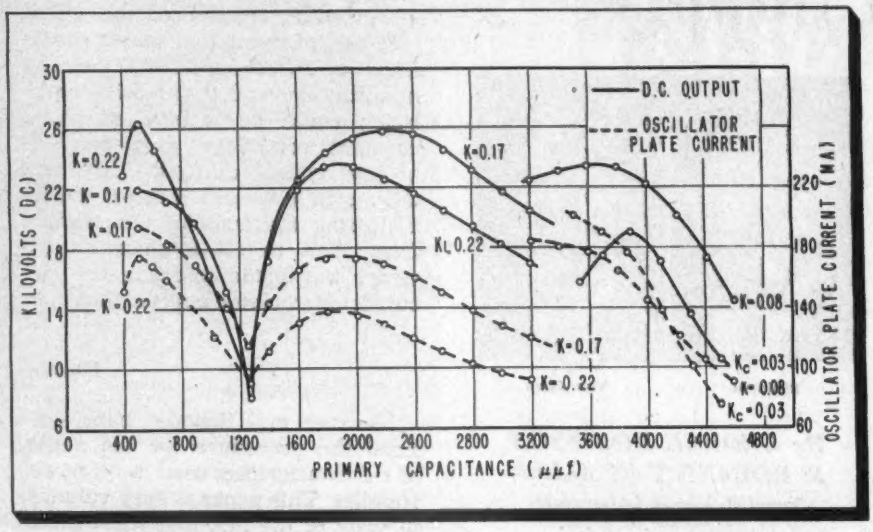

Fig. 6: Output characteristics using different coefficients of coupling, L_{pri}=0.13 mh, L_{sec}=31.1 mh. Oscillator plate voltage is 350 volts, and the dc load is 125 megohms

reduced to a minimum. Experience with the 1B3GT rectifiers showed that they would frequently become gaseous and unduly increase the r-f transformer loading. There have been no failures other than filament breakage due to handling, when using the 5825's, even though 150 type 5825 tubes have been in service for several hundred hours for each tube.

Secondary Coil

The secondary coil of the r-f transformer was designed to deliver 15,000 v. peak as a maximum with the range of operation from 10,000 to 12,500 v. peak. Designing a secondary coil to withstand such high voltages poses the problem of prevention of corona and excessive heating. Such problems are particularly difficult where the physical size of the coil must be kept small. Factors influencing the design of the secondary coil are listed in order of descending importance:

1. Absence of corona at 15 kv peak.
2. Absence of breakdown from heating.
3. Small physical size.
4. High unloaded Q.
5. High inductance.
6. Low distributed capacitance.
7. Low loaded Q.

Considering these design parameters, several factors are seen to be incompatible so that it becomes necessary to make compromises. For example, to insure freedom from corona, this wire size must be large; but this precludes maximum inductance for a given space. To reduce coil heating, the winding must be distributed to give adequate heat dissipation and ventilation, whereas the inductance would be higher for a more compact coil. The result is that anything done to reduce coil heating, which at the same time, reduces the tuned impedance of the tank circuit, may result in a net increase in coil loss and coil heating instead. Therefore, increasing wire size and turns distribution must be done judiciously so that the tuned impedance will be kept sufficiently high to prevent excessive secondary coil losses.

An attempt was made to use an available commercial r-f transformer which has the following dimensions:

	Secondary	Primary
Number of Turns	1400	40
Form of diameter	1.25 in.	3.25 in.
Number of pies	7	2
Wire Size	3/41 Litz	50/38 Litz
Inductance	44.4 mh	0.21 mh
Coil height	1.55 in.	0.55 in.
Q	250	330

This secondary coil was not practical for operating above 10 KV peak; arc-over and corona caused failures at 12.5 KV under conditions of high humidity and long continuous operation. The compact 7-pie construction of this coil did not allow sufficient radiation of heat and since the primary r-f coil was mounted coaxially with the secondary r-f coil, the high voltage end of the secondary was close to the primary windings and arc-over occurred. The small wire size and configuration of this secondary r-f coil limited the maximum operating voltage to 10 KV peak. It was found that the allowable maximum operating voltage could be raised by addition of forced-draft cooling; however, for this application the addition of a blower unit was not practical. Fig. 4 shows the output characteristic of the voltage doubler using this commercial coil.

Using the experimental data for the performance of the commercial coil in addition to design techniques set forth by Mautner and Schade[1], a r-f transformer was designed having the following dimensions:

	Secondary	Primary
Number of turns	1400	32
Form diameter	1.25 in.	3.25 in.
Number of pies	10	2
Wire size	7/41 Litz	50/38 Litz
Inductance	31.1 mh	0.13 mh
Coil height	2.35 in.	0.55 in.
Unloaded Q	260	360

This secondary coil proved quite satisfactory operating at voltages as high as 17.5 KV peak without evidence of corona or excessive heating. It is evident that reducing the inductance of the secondary coil would lower its impedance at resonance which would in turn raise the coil losses due to increased secondary current. However, the additional pies, increased wire size, and the overall increase in radiating surface tended to reduce the operating temperature of the coil. The actual measured temperature rise was found to be slightly lower than that of the commercial coil, even though calculations indicated that coil losses were increased about 30%. Both coils were wound on thin impregnated forms that were slotted between each pie winding to give as much ventilation as possible and still provide adequate support for the windings.

Output Characteristics

Output characteristics for the new secondary coil, with two different primary coils, are shown in Figs. 5 and 6. Plotting dc voltage output versus primary tank capacitance gives a better representation of output characteristics than the conventional plot of voltage output versus frequency. The change in frequency that results from variations in primary capacitance is small, in the order of 5 to 8 KC, and is not as convenient to obtain as values of primary capacitance over the same range. Another reason for plotting the value of primary capacitance as abscissa, is its importance as a variable in determining the r-f transformer output. In maximizing the output of a r-f power supply, the most important adjustments are (1) degree of coupling in the r-f transformer and (2) primary tuning capacitance, each adjustment made with a constant dc oscillator plate voltage and load. Since the secondary of the r-f transformer is tuned by its distributed capacitance and the parallel capacitance of the high-voltage rectifying circuit, tuning ad-

(*Continued on page* 117)

Transistor Characteristics at Low and Medium Frequencies

How properties of junction types modify circuit performance. Use of vacuum tube analogy and admittance parameters lead to simplified design approach

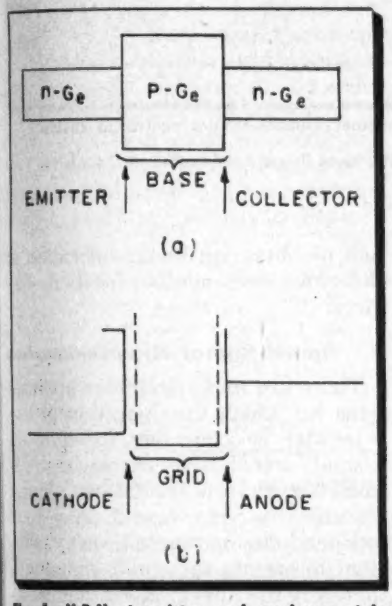

Fig. 1: N-P-N- transistor and analogous tube

By L. J. GIACOLETTO
RCA Labs. Div.
Radio Corp. of America
Princeton, N. J.

The performance of a junction transistor changes rapidly when the operating frequency is increased. To obtain a better understanding of the factors that determine the low and medium frequency performance, the transistor parameters that are of importance must first be understood, and next, suitable methods of parameter measurement must be devised. This article will be concerned with these two aspects.

In order that the terminology and symbology to be employed in this presentation are well understood, it is necessary that a preliminary development of the transistor subject be undertaken. The starting point for this development is a vacuum tube analogy[1] as shown in Fig. 1. Here an n-p-n junction transistor is compared directly with a three-element vacuum tube. The emitter corresponds to the cathode and the collector to the anode. In the transistor, the active region is the p-type germanium base. The corresponding active region in the vacuum tube is the space included between the cathode and anode. In order that the vacuum tube active region be field-free, as is approximately the case in the transistor, the vacuum tube active space is enclosed between two grids connected together to form a grid structure which is now comparable with the transistor base element.

A direct comparison between the two devices is particularly useful to those who are making a transition from vacuum tube art to transistor

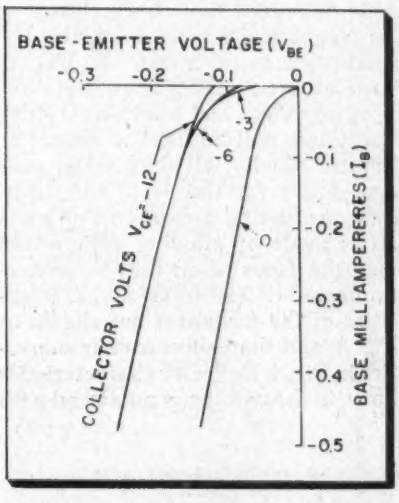

Fig. 2: Base characteristics of p-n-p type

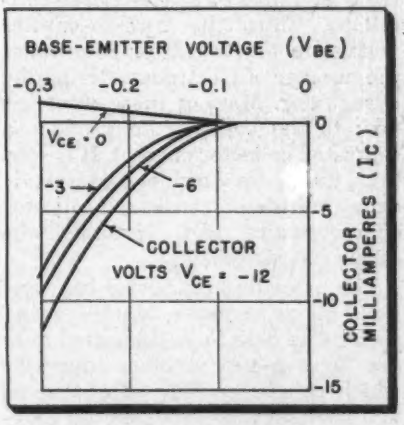

Fig. 3: Transfer characteristics of p-n-p unit

Table I: (I) Common-Emitter Nodal Equations and Parameters

Table II: (r) Definitions of Transistor Amplification Factors

$$\begin{cases} I_b = y_{bbe} V_{be} + y_{bce} V_{ce} \\ I_c = y_{cbe} V_{be} + y_{cce} V_{ce} \end{cases}$$

$y_{bbe} = g_{bbe} + jb_{bbe}$ = INPUT ADMITTANCE WITH OUTPUT SHORT-CIRCUITED

$y_{bce} = g_{bce} + jb_{bce}$ = REVERSE TRANSFER (FEEDBACK) ADMITTANCE WITH INPUT SHORT-CIRCUITED.

$y_{cbe} = g_{cbe} + jb_{cbe}$ = FORWARD TRANSFER ADMITTANCE WITH OUTPUT SHORT-CIRCUITED.

$y_{cce} = g_{cce} + jb_{cce}$ = OUTPUT ADMITTANCE WITH INPUT SHORT-CIRCUITED

α_{cb} = FORWARD COLLECTOR-TO-BASE CURRENT AMPLIFICATION FACTOR $= -\left.\frac{\delta I_c}{\delta I_b}\right|_{V_{ce}=\text{cons.}} = -\frac{y_{cbe}}{y_{bbe}}$

α_{bc} = REVERSE BASE-TO-COLLECTOR CURRENT AMPLIFICATION FACTOR $= -\left.\frac{\delta I_b}{\delta I_c}\right|_{V_{be}=\text{cons.}} = -\frac{y_{bce}}{y_{cce}}$

μ_{cb} = FORWARD COLLECTOR-TO-BASE VOLTAGE AMPLIFICATION FACTOR $= \left.\frac{\delta V_{ce}}{\delta V_{be}}\right|_{I_c=\text{cons.}} = -\frac{y_{cbe}}{y_{cce}}$

μ_{bc} = REVERSE BASE-TO-COLLECTOR VOLTAGE AMPLIFICATION FACTOR $= \left.\frac{\delta V_{be}}{\delta V_{ce}}\right|_{I_b=\text{cons.}} = -\frac{y_{bce}}{y_{bbe}}$

ϕ_{cb} = FORWARD COLLECTOR-TO-BASE POWER AMPLIFICATION FACTOR $= \frac{|y_{cbe}|^2}{4 g_{bbe} g_{cce}}$

ϕ_{bc} = REVERSE BASE-TO-COLLECTOR POWER AMPLIFICATION FACTOR $= \frac{|y_{bce}|^2}{4 g_{bbe} g_{cce}}$

CONJUGATE ADMITTANCE MATCH EQUATIONS:

LET $$G_E = \frac{g_{bce}g_{cbe} - b_{bce}b_{cbe}}{g_{bbe}\ g_{cce}}$$

$$B_E = \frac{b_{cbe}g_{cbe} - b_{cbe}\,g_{bce}}{2g_{bbe}\,g_{cce}}$$

THEN

$$g_{i\text{-}cm} = g_{bbe}\sqrt{1 - G_E - B_E^2} \qquad b_{i\text{-}cm} = b_{bbe} - g_{bbe}B_E$$

$$g_{o\text{-}cm} = g_{cce}\sqrt{1 - G_E - B_E^2} \qquad b_{o\text{-}cm} = b_{cce} - g_{cce}B_E$$

$$\text{FORWARD POWER AMPLIFICATION} = \frac{4\mathscr{G}_{cb}}{\left[2+2\sqrt{1 - G_E - B_E^2} - G_E\right]}$$

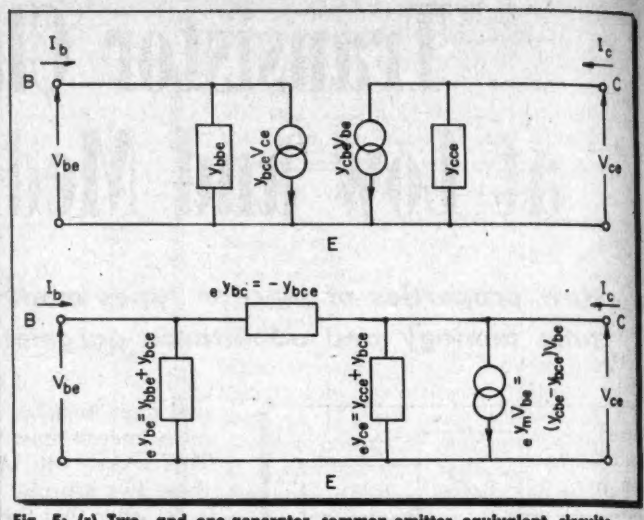

Fig. 5: (r) Two- and one-generator common-emitter equivalent circuits

Table III: (l) Conditions for Maximum Power Amplification in Transistors

art. Both transistor and vacuum tube require a positive voltage on the base and grid respectively in order to get significant output current. For this mode of biasing, both devices exhibit "pentode" output characteristics with the collector or anode current being essentially independent of the collector or anode voltage except at low voltages where the collection of electrons is limited by space-charge conditions. Thus, the base-to-emitter voltage in the transistor determines the number of electrons entering the base wafer. Most of these electrons flow to the collector to produce a saturated collector current. It is seen then, that there is a close correspondence between transistor collector characteristics and vacuum tube anode characteristics.

The preceding discussion has centered about an n-p-n junction transistor. The data to be presented here are for a p-n-p junction transistor which can be considered analogous to a vacuum tube provided the cathode emits positrons. The charge carrier for either device is now positive so that all voltage polarities must be reversed.

The dc characteristics of a junction transistor can be presented in several different ways. A set of characteristics that appears to be particularly useful includes the base characteristics, transfer characteristics, and collector characteristics. This set of characteristics follows closely the data usually presented for a vacuum tube. Following vacuum tube practice, the transistor voltages are measured with the emitter as the reference point. Thus, the base characteristics for a p-n-p junction transistor are depicted in Fig. 2. The following comments are applicable to this as well as the following figures. The axis directions have been chosen to be algebraically consistent with the quantities being measured. Uppercase letter subscripts are used to denote dc values and lower-case letter subscripts will be used to denote ac values. Finally, all data to be presented are for the same transistor, an experimental p-n-p junction transistor made by alloying indium into opposite faces of an n-type germanium wafer.[2] The transfer characteristics of the transistor are shown in Fig. 3, and the collector characteristics in Fig. 4. Collector characteristics have, in the past, been published with

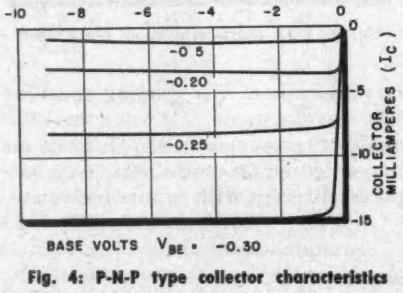

Fig. 4: P-N-P type collector characteristics

the emitter current as the running parameter, but, in this case, a considerable amount of redundant information is presented stating that the emitter current is approximately equal to the collector current. The collector characteristics in the present slide are more informative because the parameter is the base-to-emitter voltage. Among other things, it is apparent, as was also indicated in the preceding transfer characteristics, that the transistor exhibits nonlinear control characteristics similar to a vacuum tube. The problem of obtaining linear operation is therefore very similar for both devices.

Small-Signal Representation

There are many amplifier applications for which the operation of the transistor is accurately specified on a small-signal basis. Accordingly, a small-signal representation of the transistor is very useful. Any four independent parameters are sufficient to specify the small-signal and therefore the linear) operation of the transistor. The parameters most often employed are the four coefficients associated with the input and output terminal equations. Since these terminal equations can be written in either a nodal or a loop form, there is a choice of using either admittances or impedances as the parameters. Most of the literature that has been published has employed the impedance parameters. It is the author's belief that the nodal equations together with the admittance parameters are somewhat more suitable for the following reasons:

(1) The emitter current is approximately continuous through the device so that current equations appear more appropriate;

(2) The nodal equations lead easily to a π equivalent circuit which has been used extensively in connection with vacuum tubes because of greater ease of circuit adaptability. In contrast, the loop equations lead easily to a T equivalent circuit with an inaccessible neutral point;

(3) One of the most compelling reasons is the existence of commercial equipment for the measurement of the real part of the admittance parameters.

There are three possible transitor

connections depending upon which of the three transitor elements is is chosen as common. In order to maintain the comparison with the vacuum tube and because this will probably be the most frequently used connection, the common-emitter circuit is singled out for detailed attention. Accordingly, this article will be devoted exclusively to the admittance parameters associated with the common-emitter circuit. It is well to note that this choice imposes no serious restrictions as, knowing one set of independent parameters the appropriate parameters associated with any other circuit including the loop-derived parameters can be easily determined. In order that the notation to be employed be understood, the nodal equations and the definition of the admittance parameters for a common-emitter transistor circuit are shown in Table 1.

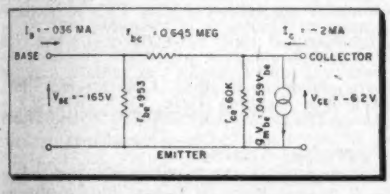

Fig. 6: Nodal derived circuit of p-n-p unit

A few words concerning the notation employed may be appropriate. The first two subscripts are chosen to coincide with the numerical notation often used in connection with a general four-terminal network. The last subscript designates the common element of the circuit connection.

The nodal equations are depicted most directly by means of a two-generator equivalent circuit shown on the top of Fig. 5. The one-generator equivalent circuit shown on the bottom of Fig. 5 is the π equivalent circuit that is doubtlessly familiar to all who have studied vacuum tube operation particularly at high frequencies. The parameters of the π equivalent circuit employ a pre-subscript to designate the common element and have been designated in a unique manner so that there will be no ambiguity with the two-generator parameters. It is well to point out that ${}_{e}y_m$ is a parameter somewhat comparable to the complex transconductance of a vacuum tube and therefore is of considerable importance. The nodal parameters can be used to define certain amplification factors as shown in Table II. Of these factors, the forward current amplification factor has been greatly overworked in connection with transitor operation. Equally as important is the forward voltage amplification factor which has so often been overworked in connection with vacuum tube operation. The power amplification factors were conceived by the speaker in order to have a single factor that might be used as an index of the transitor performance. It is noted that the power amplification factors are essentially the product of the appropriate voltage and current amplification factors with suitable modifications so that the final result is always a real quantity.

With the aid of the four nodal parameters, the actual circuit amplification, the input and output match conditions, as well as other operating data can be determined. These quantities will not be considered except as they enter into the subsequent considerations of the transistor performance.

Low-Frequency Measurements

In the preceding formulation of small signal representation, admittances rather than conductances have been used because the junction transitor exhibits rather pronounced reactive effects even at relatively low frequencies. At low enough frequencies, all admittances are essentially conductances, and it is these conductance parameters that are of interest for the low-frequency operation of the transitor. Although the conductance parameters can be measured by voltmeter-ammeter methods a much better method is the use of a bridge circuit. The General Radio Co. Type 561 vacuum tube bridge can be readily used for this purpose with the junction transitor being connected as though it were a vacuum tube triode. A suitable collector-to-emitter voltage is connected to the bridge plate terminals and a suitable base-to-emitter voltage is connected to the bridge grid terminals. This will permit the measurement of two parameters, the output conductance, g_{cce}, and the forward transfer conductance, g_{cbe}, and their ratio, the forward voltage amplification factor, μ_{cb}. The collector and base connections together with their associated supplies are then interchanged and the input conductance, g_{bbe}, the reverse transfer conductance, g_{bce}, and the reverse voltage amplification factor, μ_{bc}, measured.

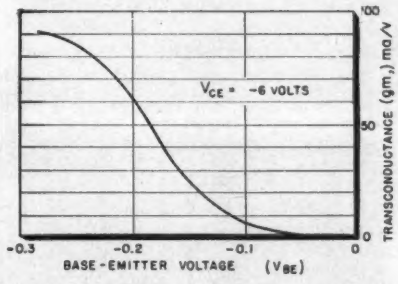

Fig. 7: P-N-P transconductance characteristics

Bridge Measurements

The bridge measurements are made at 1,000 CPS, and since reactive components are also balanced, the real components of the admittances at 1,000 CPS are obtained. The bridge balance for the measurements made on the collector side are obscured to some extent by transistor noise, but with some care and the usual precautions, measurements on the collector side as well as on the base side can be made to three significant figures. The measurement of the voltage amplification factors can be used to check the self-consistency of the data which is generally within a few percent.

The 1,000 CPS equivalent circuit for the p-n-p junction transistor is shown in Fig. 6 with components other than trans-conductance specified in terms of resistance rather than conductance. The dc operating point chosen was a collector-to-emitter voltage of -6.2 volts and a collector current of -2 ma. There are a few items of interest in connection with this equivalent circuit. First, it is noted that the feedback resistor between the input and output, although not infinite as is the case for a vacuum tube, is large enough that it is sometimes permissable to consider the input and output circuits independently. Next, it is interesting to note that the transconductance, 45.9 ma/volt, of the transistor is considerably larger than transconductances of vacuum tubes. Of greater importance, is the fact that the transconductance-to-emitter current ratio, g_m/I_E, should have the theoretical value of $e/kT = 38.6$. The actual value of this ratio does not differ greatly from this theoretical value. Thus for the transistor under consideration this ratio is 23, that is,

(*Continued on page 150*)

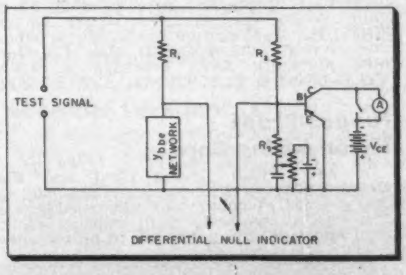

Fig. 8: Input admittance bridge test set

New Equipment and Components f

Preview of products to be displayed at 1953 IRE Convention

Mounting Assembly

The 11338 assembly is a relay rack mounting frame designed to hold combinations of the 11301 cover tray which is the mounting base for the Altec Lansing A-428B amplifier and the 11302 cover tray which is the

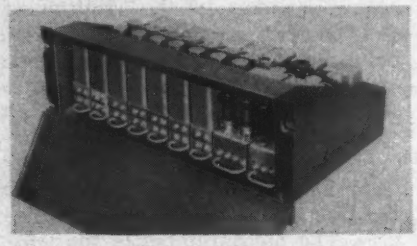

mounting base used with the A-429B amplifier, P-522A and P-523B power supplies. The 11338 assembly will hold a maximum of nine 11301 trays or a maximum of six 11302 trays. These trays are mounted permanently in the 11338 assembly in the quantity which may be required and the amplifiers or power supplies are mated into them since they contain the mating part of the Cannon connector to which permanent wiring is attached. Wiring gutters are provided in this frame, as well as heavy-duty terminals for connecting 60 cycle power leads. All wiring connections are made in the rear. The assembly provides easy access to the equipment contained therein and facilitates testing and metering of the various units.—**Altec Lansing Corp., 9356 Santa Monica Blvd., Beverly Hills, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Antennas

A complete line of UHF and VHF receiving antennas include Model UHF 200 rhombic antenna shown. Terminal resistance is 470 ohms, and gain over dipole is 9 db at

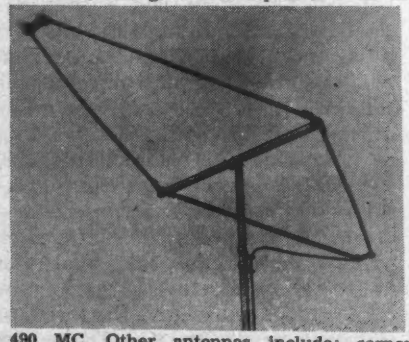

490 MC. Other antennas include: corner reflector with 13 db gain; ultra V-beam; six-element Yagi for 10 UHF channels; broadband UHF bowtie and reflector with 7.3 db gain; double-vee; and the Model Jet 283 VHF-UHF combination combining a bowtie and conical antenna.—**JFD Mfg. Co., Inc., 6101 Sixteenth Ave., Brooklyn 4, N.Y.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Fungus-Proof Nylon Lacing Cord

A new Nylon Lacing Cord and Flat Braided Tape resists deterioration due to the growth of mold and micro-organisms. The special synthetic resin coating on the cord and tape causes the life to be considerably lengthened. They are said to have a high abrasion resistance and low moisture absorption. A further advantage is that they have the desirable malleability of wax and are non-toxic to humans.—**Heminway & Bartlett Mfg. Co., 500 Fifth Ave., New York 36, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

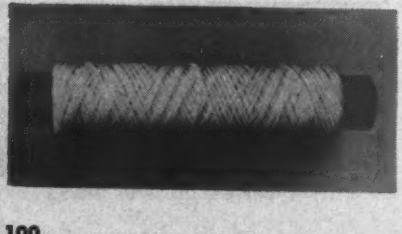

X-Band VSWR Meter

Simplified, direct measurement of VSWR in the 8.5 to 9.6 KMC range is accomplished with the Model 539 test set. One application shown is checking the transmission efficiency of a radar scanner's waveguide feed system. This portable X-band unit contains modulated source, microwave bridge, de-

tector, amplifier, indicator and power supplies. VSWR range is 1.05 to 3.0 in three calibrated scales, and 3 to 10 uncalibrated. Accuracy is from 5 to 10%. Size of the 35-lb. set is 17.75 x 11.25 x 10 in. In addition, other equipments on display include: Model 538 direct-reading X-band power meter; thermistor mounts for measuring power in four bands between 5 and 25 KMC; and the SRX-52 Klystron local oscillator.—**Sperry Gyroscope Co., Great Neck, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Color TV Equipment

An integrated assembly of seven racks comprise the equipment for the generation and test of color and monochrome TV sig-

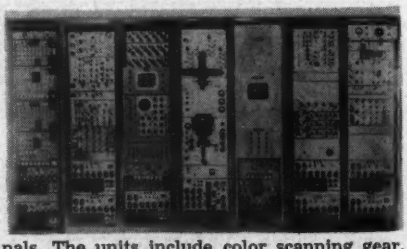

nals. The units include color scanning gear, NTSC color transmitter and NTSC color receiver employing a three-tube dichroic monitor. Automatic pushbuttons control the transmission and reception of existing color signals. Also on display are monochrome scanning equipment, an economy type TV picture generator, and UHF noise generator. —**Telechrome, Inc., 88 Merrick Rd., Amityville, N.Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Single-Sideband Receiver

Model 155 triple-diversity single-sideband receiver is said to provide the optimum in reception of all forms of modulation used in HF (3 to 30 MC) communication. This includes reception of reduced carrier single-

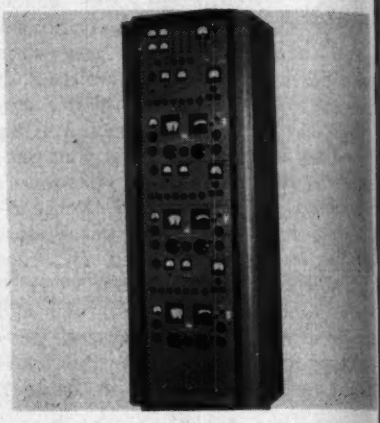

sideband transmission, and double-sideband transmission (either AM or PM) by exalted-carrier reception. It is available with either Hammarlund type SP600JX or Collins type 51J communication receivers in triple-diversity, dual-diversity, or single receiver arrangements.—**Crosby Laboratories, Inc., Box 233, Robbins Lane, Hicksville, N.Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Portable Scaler

Self-contained portable scaler Model 200 is a Geiger-Mueller scaler which provides count indication with an electronic scale-of-eight and a mechanical register. Unit includes input amplifier, scale-of-eight with interpolation meter, register and drive, and battery-vibrator supply. Maximum counting rate is 6000 counts per minute, with a paired pulse resolution of 0.1 millisecond. Input sensitivity is 0.5 v., and the vibrator supplies 900 v. A 700-v. type is also available. Battery complement includes three "little six" 1.5-v. cells, three D cells, and one 45-v. B battery, with a battery life of 60 hours intermittent operation. The 11-lb. device measures 11 x 6.25 x 8 in. Other equipment to be on display are the Series 1550 digital recorder and Model 558 events-per-unit-time meter.—**Berkeley Scientific, 2200 Wright Ave., Richmond, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES

Power Supply

Model 750 power supply features one regulated dc voltage supply with excellent regulation, low ripple content and low output

impedance. It is continuously variable from 0-600 v. and delivers from 0-750 ma. In the range 30-600 v. the output voltage variation is less than ½% for both line fluctuations from 105-125 v. and load variation from minimum to maximum current. The ripple voltage is less than 10 mv peak to peak.—**Kepco Laboratories, 131-38 Sanford Ave., Flushing, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Additional IRE Equipment Previews will appear in the April issue of TELE-TECH & ELECTRONIC INIDUSTRIES

for Engineers and Designers

Exhibitors' products reveal many new developments

Precision "Magic Tee"

A precision "X" band hybrid junction uses a new type of construction assuring isolation of −50 db or better as well as low VSWR

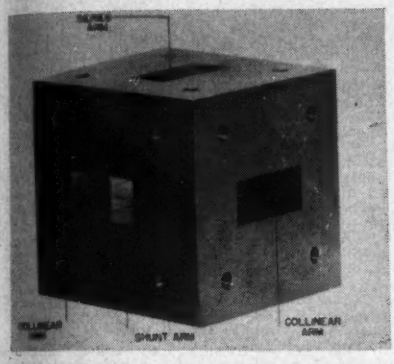

over a broad frequency range. Stub and septum matching is employed to provide a nominal VSWR of 1.05 at the design center, and 1.185 at the 10% band extremes, using any arm as input terminal. Better VSWR's can be provided on special order. In addition to its function as a Magic Tee, it can be used as a highly accurate power divider, in the configuration of a shunt or series tee, by blocking the appropriate arms. It is supplied with plain flange faces, in .4 x .9 inch waveguide size in brass or aluminum. Other sizes can be supplied on special order.—**General Precision Laboratory, Inc., 63 Bedford Road, Pleasantville, New York.**—TELE-TECH & ELECTRONIC INDUSTRIES

Tandem Coupling Kits

Two new rheostat coupling kits facilitate the mounting of certain standard Ohmite-rheostats in tandem. Each kit consists of a

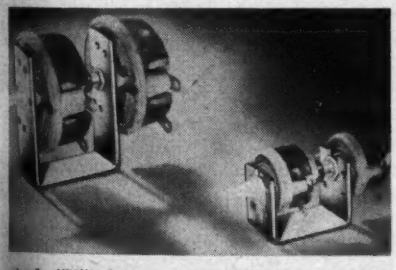

steel "U" frame, mica washer, coupling, Allen wrench, and assembly instructions. The large frame is designed for use with Ohmite Model G, K, or L rheostats. The small frame is designed for use with Ohmite Model H or J rheostats.—**Ohmite Manufacturing Co., 4835 Flournoy St., Chicago, Ill.**—TELE-TECH & ELECTRONIC INDUSTRIES

New Hermetically-Sealed Series

The KH and RKH connector series have been added to Cannon's heremetically-sealed lines. The new plugs and receptacles are similar in construction to the GSO2 and GSO6 (AN type). Chief features of the steel shell common to the Cannon Electric K and RK types, is the heavy duty special Acme thread. KH receptacles mate with standard K

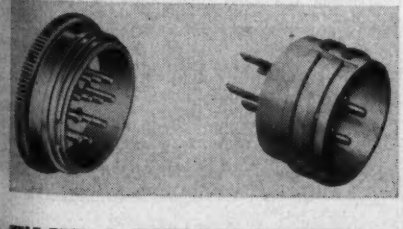

plugs and RKH plugs with RK receptacles. The true hermetic seal is achieved by the special vitreous insulation around the steel contacts and fused to the shell. The KH connectors will withstand 200 to 900 psi, depending on size and contact complement. −320°F to +600°F, emergencies to 1,000°F if mating fitting and finish are expendable. All MIL-C-5015 vibration and thermal shock tests are met.—**Cannon Electric Co., 3209 Humboldt St., Los Angeles 31, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Projector for TV

A lightweight projector for TV stations provides automatic, remote or local control "lapping" of an unlimited number of 2"x 2" transparent sildes. In operation, projection alternates from one lens system to the other, and the "turrets" which hold the slides alternately revolve one slide space as they are actuated by a solenoid mechanism. One loading of the two turrets gives a sequence of twelve slides. Additional loaded slide turrets, which can be substituted for used turrets in a matter of seconds, provide an unlimited sequence. Tolerances on the projection mechanism are such that the variation in positioning of successive images is well within the $\frac{1}{32}$ in. width image on mosaic at approximately 36 in. from

the slide. Other lenses may be used to provide longer focusing distances. The equipment includes infra red filters to give optimum contrast with the iconoscope film camera.—**Gray Research and Development Co., Inc., 521 Fifth Ave., New York, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Capacitors

A line of high voltage disc ceramicon capacitors is said to provide the smallest unit available for a given voltage and capacitance. The standard sizes in the new lines are $\frac{3}{8}$ in., $\frac{1}{2}$ in. and $\frac{3}{4}$ in. maximum diameter. They have phenolic dipped, vacuum wax impregnated case insulation. Leads are #22 tinned copper wire. Standard dc working voltage ratings are 1000, 1500, 2000, 3000, 5000, and 6000, with a dielectric strength test of twice the rated working voltage.—**Erie Resistor Corp., 644 W. 12 St., Erie, Pa.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Comparison Bridge

Accurate and simple production tests can be performed on the new general-purpose type 1604-A Comparison Bridge. With a basic accuracy of 0.1%, the bridge can be used for direct comparison of resistors, capacitors and inductors over the wide impedance range of about 2 ohms to 20 megohms. Two impedance-deviation ranges, ±5% and ±20% are provided. Dissipation-factor (or storage-factor) differences are also indicated. The bridge is completely self-contained with a cathode-ray visual detector and an oscillator operating at either 1 kc or 5 kc. Operation is from the ac line. The point at which the bridge is grounded can be switched, so that measurements can be

made with the unknown either grounded or ungrounded. Primary application is that of sorting components to a given tolerance. The standard to be used need not be a precision standard but can be a component which has been independently measured. An offset zero is provided within the bridge so that an accurate standard is not necessary. The bridge is also useful for measuring center-tapped windings to be sure that the tap is correctly center; for checking ganged potentiometers and capacitors; and for measuring small capacitors of a few $\mu\mu$f by placing them in parallel with, say, 100 $\mu\mu$f.—**General Radio Co., 275 Massachusetts Ave., Cambridge 39, Mass.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Filter Subminiaturization

Reductions of from 40 to 50% in the size of r-f interference filters through the use of metallized paper capacitor elements and inductances made with special windings on high permeability core materials are

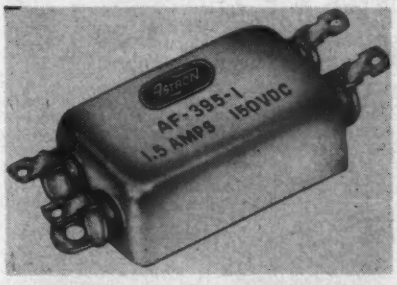

currently being effected. Standard or specially designed filters are available in single or multiple filter section for suppressing conducted and radiated noise on one or more power lines and for noise attenuation from 14 kc to 1,000 mc. Subminiature filters conform to all existing government specifications.—**Astron Corporation, 255 Grant Ave., E. Newark, N. J.**—TELE-TECH & ELECTRONIC INDUSTRIES

Coaxial Terminal Triode

A water-cooled ring seal triode incorporating an integral anode water jacket, the ML-6257, is designed specifically for r-f

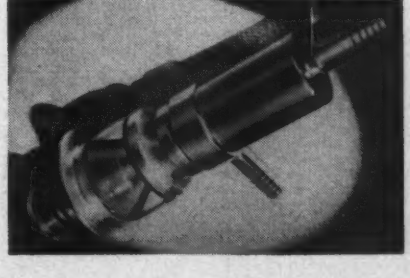

heating application in the 2-3 kw range, but is well adapted to AM, FM and TV transmission. The tube has plate input and dissipation ratings of 7 kw and 5 kw, respectively; stress-free thoriated tungsten filament operates at 12.6 v., 27 amps. Maximum ratings apply to 110 MC. It is also available in forced-air cooled model and in a version designed for use with Machlett quick-change automatic seal water jacket.—**Machlett Labs., Inc., Springdale, Conn.**—TELE-TECH & ELECTRONIC INDUSTRIES

Resistors

Hermetically sealed resistor series 1160 and 1161 features rugged, shock-resistant construction provides complete protection from corrosion, fungus and other harmful effects

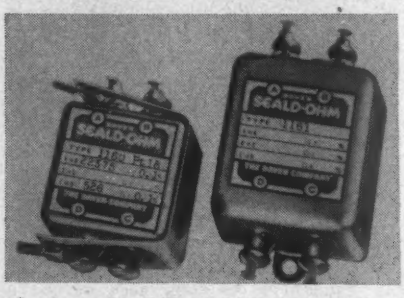

of extreme humidity and temperature. These resistors are intended for use as secondary standards, resistor elements in bridge networks, in voltage divider circuits, in attenuation networks, etc. Resistor windings, either spool or card type, are supplied with various types of wire, depending upon the resistance and temperature characteristics required for the specific application. Temperature coefficients as low as 20 parts per million are available. All windings are artificially aged to insure stability and may be obtained with accuracies as close as ±0.05%. The high stability achieved assures no appreciable variation in resistance or accuracy with long use. Spool-type resistors are non-inductively wound and for most applications, there is no appreciable effect over the audio range. Where card-type windings are employed, the frequency range is limited by the particular design; the usual range is from 0 to 10 MC.—**The Daven Co., Dept. HR, 191 Central Ave., Newark 4, N. J.**—TELE-TECH & ELECTRONIC INDUSTRIES

Vacuum Gauge

Type 511 Alphatron (R) vacuum gauge employs a shielded radioactive source instead of a hot filament. Alpha particles ionize the gas. Ionization current produced is measured

by a dc amplifier which is calibrated to give absolute pressure in millimeters of mercury. The sensing element and first stage amplifier are housed in a steel envelope which weighs only four ounces. Attachment to the vacuum system is made by a ⅛ in. standard pipe thread tubulation. The power supply, high stage amplifier, range selector, and output meter are incorporated in a compact stainless steel housing weighing 7 lbs. Dependence on outside power supply which is subject to fluctuation is eliminated by the use of readily available batteries. The use of batteries eliminates an expensive regulated direct current power supply and substantially reduces the cost of the gauge.—**National Research Corp., 70 Memorial Drive, Cambridge, Mass.**—TELE-TECH & ELECTRONIC INDUSTRIES

Potentiometers

A new series of panel mounting precision potentiometers, Dekapot model DP-211, achieve a linearity that is better than ±0.01% and total resistance that is better

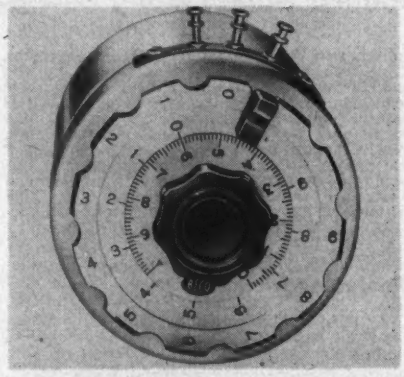

than ±0.05%. The Dekapot has two decades of fixed resistors and an interpolating slide-wire to accomplish the voltage division. The dial arrangement gives an effective scale length of 390 in. The resistance wire used has a temperature coefficient of less than ±0.002% C°. These units are now available in total resistances of 10,000 ohms. Other values are available on special order.—**Brown Electro-Measurement Corp., 4635 S. E. Hawthorne Blvd., Portland 15, Oregon.**—TELE-TECH & ELECTRONIC INDUSTRIES

Triode-Pentode

Both sections of a new miniature nine-pin, triode-pentode receiving tube are electrically independent and adequately shielded. The pentode section is said to provide excellent

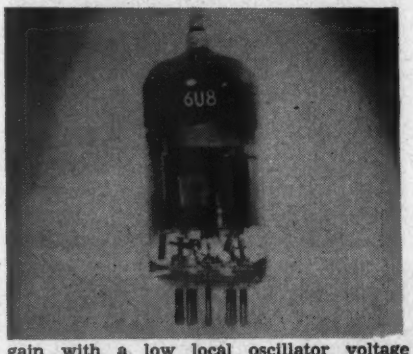

gain with a low local oscillator voltage which minimizes oscillator radiation. The pentode section may also be used as an i-f amplifier, video amplifier, sound limiter or sync separator. The triode performs satisfactorily as a horizontal or vertical oscillator, or sync clipper.—**Sylvania Electric Products Inc., Radio Tube Division, Emporium, Pa.**—TELE-TECH & ELECTRONIC INDUSTRIES

UHF Frequency Meter

A direct reading UHF frequency meter (model FM-3) has a resetability which is ±0.0005% and stability which is ±0.001%. Accuracy is ±0.001% and range is 20-640

MC. Under certain conditions it can be used to 1,000 MC. The multiple oscillator method of frequency method is utilized. It is supplied with carrying case and removable cover and can be used with batteries for portable use. Provision is made for attaching an external power supply for fixed station use.—**Gertsch Products, Inc., 11846 Mississippi Ave., Los Angeles, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES

Magnetic Tape

A new magnetic tape for critical recording applications employs a new magnetic coating material with increased magnetic remnance. Designated "Scotch" No. 120 "High Output" (trade mark) magnetic tape, it is designed especially for use in radio, television and recording studios, in computer work, and in other critical applications. The new tape is stated by the manufacturer to produce at least 8 db more output at a given distortion level than any other magnetic tape over the entire range of the audio spectrum. It has a cellulose acetate backing of the same grade and thickness as standard "Scotch" No. 111 magnetic tape. Limp and easily handled, the new tape has a strong and flexible coating, "dry lubricated" by a special process to prevent squealing on critical machines. No. 120 tape has the same coercivity, frequency response erasability and print ratio as No. 111 tape, and no change in bias is necessary to obtain maximum results from the new tape on machines now set for optimum bias for No. 111 tape. Output uniformity at 1 KC is guaranteed not to exceed ±¼ db within a reel, and ±½ db from reel to reel. The No. 120 tape is available in lengths of 2400 ft. on the NARTB reel or hub, and in 1200-ft. lengths on the 7-in. professional plastic reel with the special 2¾ in. hub only. All lengths are guaranteed splice-free. List price is $7.00 for the 1200-ft. length, $13.00 for the 2400-ft. length on the NARTB hub, and $15.85 on the NARTB reel.—**Minnesota Mining and Manufacturing Co., 900 Fauquier Street, St. Paul 6, Minn.**—TELE-TECH & ELECTRONIC INDUSTRIES

Oscilloscope Camera

A new cathode-ray oscilloscope recording camera provides still, continuously moving film, and drum photography. These three modes of operation, each having its own special advantages, provide records for measurement of electrical and physical phenomena that may be displayed on a cathode ray tube. This camera is manufactured by Southern Instruments Ltd., Surrey, England. A continuous feed mechanism provides for the movement of 25 ft. of sensitized material at rates of from 0.4 to 100 in. per second. The drum attachment, carrying 20 in. of sensitized material, provides linear speeds from 4 to 1200 in. per second. Performated or unperforated film or paper of either 35mm or 70mm width may be accommodated. The drive motor operates on

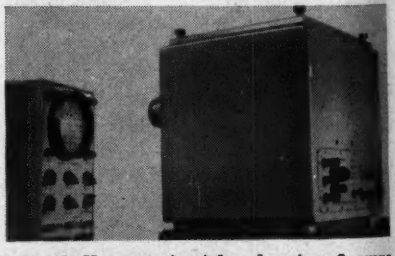

6 to 12 V approximately, drawing 6 amps maximum. An f/1.9 lens is furnished as standard.—**J. A. Maurer, Inc., Photographic Instrumentation Div., 37-01 31 St., Long Island City 1, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Batteries

A new line of low-voltage, tiny mercury batteries will meet the specific requirements and characteristics of transistor operations, such as increased energy per unit volume, long service life, constant discharge characteristics and long, corrosion-free shelf life. All Mallory transistor power supplies incorporate new contact features for better, corrosion-free service, and the Power-Pak batteries are coated with a "shrink-on" plastic to provide a tight, leakproof seal between cells. They maintain a substantially constant voltage and energy output level over wide temperature ranges at current drains from 10μa to 10 ma.—**P. R. Mallory & Co., Inc., Battery Division, N. Tarrytown, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Relay

A miniature, hermetically sealed, double pole, double throw relay, weighing only 3½ ounces, is designed to operate through a wide range of environment. Due to its well

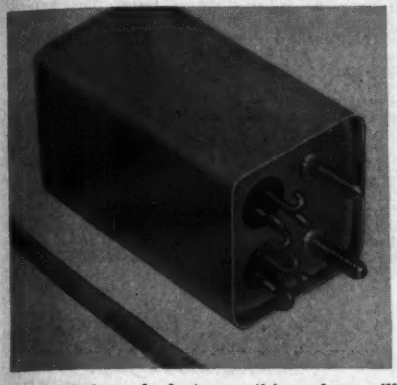

counter-balanced features this relay will withstand high acceleration, vibration, shock and tumbling. It meets the shock requirements of MIL-E-5400 and will withstand continuous acceleration of 50 G without malfunctioning. Certain contact combinations can be furnished with a required coil power as low as 20 mw and any relay in this series can be obtained with a coil resistance as high as 15,000 ohms.—**Phaostron Co., 151 Pasadena Ave., S. Pasadena, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES

Speakers

Each field coil in a new line of electrodynamic speakers is guaranteed to contain the given number of turns within the standard tolerance. There are no wire-stretching

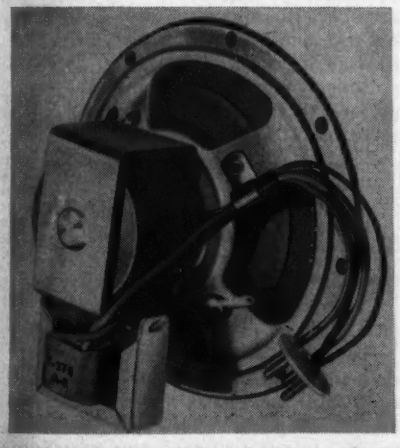

or other quality-reducing shortcuts to cause deviation from the resistance and wire size specified by the customer. The second important feature is the use of the same perfectly round "No-Rub" Voice Coil which is used on the Heppner P.M. speaker line. This coil (an exclusive Heppner feature) is installed perfectly round by means of a Heppner developed process which eliminates all egg-shaped coils that cause rubs. The electro-dynamic speakers are available in 3, 4, 5, 6½, 10 and 12 in. sizes with or without bucking coils, plugs, transformers and/or brackets as specified.—**Heppner Manufacturing Co., Round Lake, Ill.**—TELE-TECH & ELECTRONIC INDUSTRIES

Reverberation Unit

An improved form of the Goodfriend—Audio Facilities magnetic tape loop system comprises the seven-head model 42 reverberation unit improving recorded music and special effects. The signal is recorded, then reproduced by several magnetic heads at different times. The reproduced signals are returned to the recording head, and passed around the recirculation loop again with

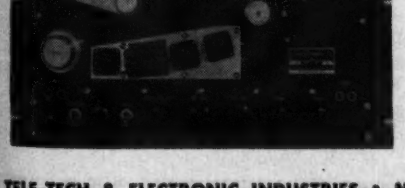

diminished amplitude. Three major controls on the 8.75 x 19 in. panel determine head arrangement, reverberation time, and reverant-to-direct sound ratio. The unit contains a zero-loss straight-through channel, as well as the tape-loop reverberation channel, so that no audio system circuit changes are necessary. The unit may be patched directly between studio-console preamplifier output and mixer-input, or between a tape reproducer output and a disc recorder input. Controlled input and output levels are −30 or +40 VU. Impedances are 600 ohms input, 600 ohms output. Frequency response for direct channel is ±1 db, 50-15,000 CPS; and for reverberation channel is ±1 db, 200-8,000 CPS, and shaped from 50 to 200 CPS, and from 8,000 to 15,000 CPS. Power requirements are 117 v., 60 CPS, 125 watts. Reverberation time is adjustable up to 10 seconds. Also, five-head model 40 is available with adjustable reverberation time up to 6 seconds.—**Audio Instrument Co., Inc., 133 W. 14 St., New York 11, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Hipot Tester

Model 55c Hipot tester has a range up to 1500 volts in steps of 250 volts with a sensitivity control that gives exact sensitivity desired for detection of faulty insulation or

surface leakage. Features include: ac or dc output; sensitivity up to one megohm/100 v; guaranteed shockproof to operator; audible alarm signal; no surface arcs.—**Bliss Electronic Corp., Box 123, Sussex, New Jersey.**—TELE-TECH & ELECTRONIC INDUSTRIES

DC Calibrator

An electronic dc calibrator has been developed to correct automatically, in true time, the non-linearities present in telemetry systems. By the use of a paper calibration

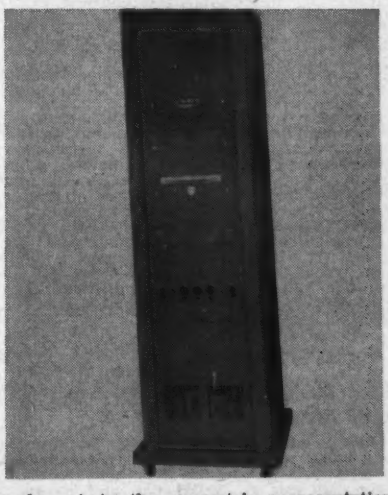

mask, cut to the geometric representation of the desired function, both transducer non-linearities as well as errors inherent in ground receiving equipment can be corrected, thus furnishing an immediate calibrated output for display or recording purposes. It operates on input signals from dc to one KC with an overall accuracy of approximately 1% of full scale. The unit is constructed on a standard relay rack mounting and measures approximately 88 x 25 x 25 in. It is designed around a 16-in. cathode ray tube, so that masks can be cut directly, without need for a reproduction process. It can also be used as an arbitrary function generator for laboratory purposes or applications involving electronic analog computers.—**Benson-Lehner Corp., 2340 Sawtelle St., Los Angeles 64, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES

Vacuum Capacitors

A full line of miniature vacuum capacitors in fixed and variable types, rated at 3 KV and 5 KV, are characterized by their small physical size, their negligible power factor,

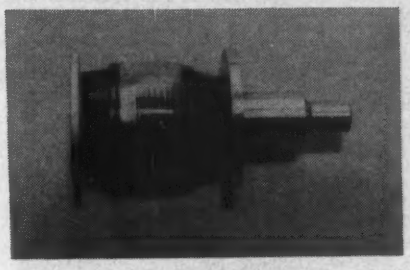

and their extremely wide capacity ranges. For example, one variable unit has a capacity range of 5½μμf to 1000μμf. Another unit has a range of 4μμf to 250μμf and is only 4 in. long. The fixed JCSL Series and the variable UCSL Series are both sold in capacities ranging up to 2000μμf.—**Jennings Radio Mfg. Co., P. O. Box 1278, 970 McLaughlin Ave., San Jose 8, Calif.**—TELE-TECH & ELECTRONIC INDUSTRIES

Helical Beam Antennas

The helix conductor in a new line of helical beam antennas for unidirectional applications in the 450-470 MC region is molded integrally into a Fiberglas-polyester

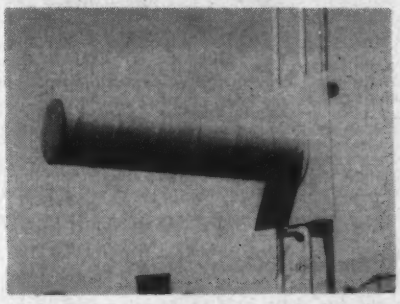

resin radome housing. The Fiberglas molded helix is rigidly mounted to a 16 in. square ground plate which terminates the coaxial cable connector and provides for convenient mount to the support tower. This electrical design affords 12 to 14 db gain in point-to-point service and provides certain advantages of circular polarization propagation over conventional linear polarized propagation. Until the techniques of molding the helix conductor into the Fiberglas housing were perfected it was almost impossible to realize the advantages of the helical beam antenna in a commercially acceptable structure. All helical units are designed to withstand 100 mph wind velocity with ½ in. radial ice load. Either right-hand or left-hand units are available as standard production items.—**Mark Products Co., 3547-49 Montrose Ave., Chicago 18, Ill.**—TELE-TECH & ELECTRONIC INDUSTRIES

X-Band ATR

Type 6276 X-Band ATR is designed for operation in the X-band at a frequency of 9280 MC. It is electrically but not mechanically interchangeable with such types as the 1B35 and 1B35A. A braid gasket flange type of mounting is located near the window instead of a resonant choke mounted seat. Because of this, lower values of normalized equivalent conductance and freedom from arcing at high power operation are said to be achieved. The tube is completely silver brazed and has an overall length of one in. The tubulation is located on the narrow side of the waveguide body. The mount for

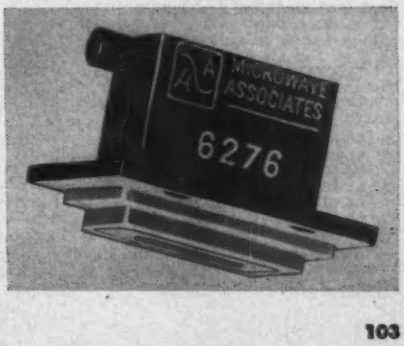

the 6276 is of the flange contacting type and may be procured from Airtron, Inc., under part number 47855. The electrical equivalent of the type 1B37 is also available. This tube, the 6284, is mechanically interchangeable with the type 6276 and may be used in the same mount. It is designed for operation at a frequency of 8750 MC—**Microwave Associates, Inc., 22 Cummington St., Boston, Mass.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Printed Circuit

The Circuitron is a printed circuit which uses a different method of bonding the pattern to the insulating base. The conductive pattern can be run from one side of the base

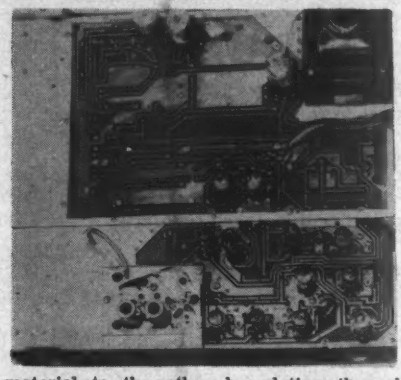

material to the other by plating through holes maintaining circuit continuity without the need for eyelets or other hardware. This permits crossovers, greater design flexibility, and easy adaptation to single-dip soldering. Copper, silver and other metals, in any specified thickness can be used for the conductive circuit. The pattern can be overplated with nickel, silver, rhodium or gold.—**Circuitron, Inc., 400 Ninth Street, Hoboken, N. J.**—TELE-TECH & ELECTRONIC INDUSTRIES

Ultrasonic Delay Lines

A series of fused quartz ultrasonic delay lines for radar and electronic computer applications are available in bandwidths of 12 MC or greater, and feature an extremely low

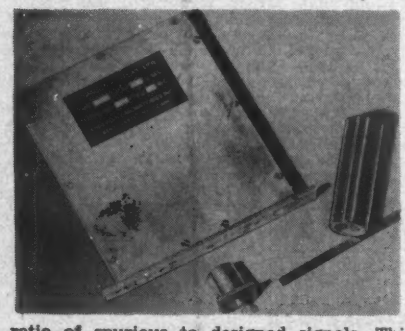

ratio of spurious to designed signals. This can be held as low as −50 db for special requirements. Insertion losses are also kept to a minimum, 34 to 50 db being characteristic depending on the terminating impedance necessary.—**Anderson Labs., Inc., W. Hartford, Conn.**—TELE-TECH & ELECTRONIC INDUSTRIES.

New High-Power Klystrons

Six high-power klystron tubes have been added to the present transmitting tube line and will be in production soon. Developed for UHF telecasting at San Carlos, Calif., by Varian Associates, Inc., the tubes are rated for a maximum power output of 15 KW with a synchronizing peak level of 12 KW. Each of the six tubes is rated for a specific UHF range and together they cover all UHF channels, from 470 to 890 MC. The type numbers, frequency ranges, and channel ranges for the six tubes:

Tube type	Frequency range	Channel range
GL-6237	47-530 mc.	14-23
GL-6238	530-590 mc.	24-33
GL-6239	590-656 mc.	34-44
GL-6240	656-728 mc.	45-56
GL-6241	728-806 mc.	57-69
GL-6242	806-890 mc.	70-83

—**Tube Department, General Electric Co., Syracuse, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES

Crossbar Switch

Multiple switching of audio, video, computer and other circuits is effected by crossbar switch employing palladium twin contacts. Available in up to 25 horizontal levels and 10 vertical levels, the unit switches up

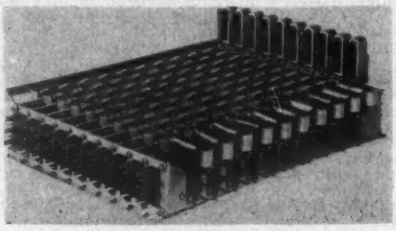

to 10 MC. Plug-in connections are used, and strap wiring is eliminated. Contacts are made by successive operation of select and hold magnets, each requiring 200 ampere turns equivalent to 2.5 watts. Release and operating time is 0.0005 sec. For 10 x 10 switch shown, crosstalk is more than 60 db down at 10 MC, bridging capacity between adjacent conductors is 15$\mu\mu$f, and size is 8 x 11 x 3.5 in.—**James Cunningham, Son & Co., Rochester 8, N. Y.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Wavemeter

A wavemeter test set consists of a portable indicating instrument of the resonant cavity type and other auxiliary apparatus contained in a wooden carrying case. It measures the frequency and relative strength

of signals from 2400 to 3400 MC, each test set combining two methods for making such measurements; namely, the transmission method and the absorption method. Maximum powers required to produce full scale deflection are: absorption, 2 mw; transmission, 3 mw. Accuracy is ±0.1%, and "Q" loaded is over 1000. Size is 5¾ x 5¼ x 3⅜ in., and weight is approximately 6 lbs., 9 ozs. The American Wavemeter is being supplied also as TS-117/GP.—**American Encaustic Tiling Co., 924 Kenilworth Ave., Lansdale, Pa.**—TELE-TECH & ELECTRONIC INDUSTRIES

Standard Microphone and Blast Gage

Model M-141A wide range microphone and blast gage will make absolute sound pressure measurements over the frequency range 20 cps to 30,000 cps and covers a dynamic range from a few dynes/cm² to several million dynes/cm². The new standard is in the form of a ⅝ in. diameter cylinder

with a small flange near the pressure sensitive end to permit its flush mounting into a pipe or chamber when desired. A 20-ft. cable is provided as an integral part of the microphone and the sensitivity is accurately adjusted so that 5 μv/dyne/cm² sound pressure appears at the open circuit terminals of the cable plug. The microphone employs ADP crystals in its construction and may be used up to temperatures of 160°F. Total electrical capacity is approximately 500$\mu\mu$f. Adjustment of the absolute sensitivity of the instrument has been chosen so that if the cable plug is connected to the input terminals of a Ballantine model 310A VTVM, or its equivalent, the voltmeter becomes a calibrated sound pressure level indicator giving direct readings of sound levels from 100 db to 221 db. If the voltmeter is used with a times 10 preamplifier, sound levels from 80 db may be accurately measured.—**Massa Laboratories, Inc., 5 Fottler Road, Hingham, Mass.**—TELE-TECH & ELECTRONIC INDUSTRIES.

Smallest Broadband Coaxial Repeater

Coaxial cables, carrying television signals from city to city, require amplifiers at intervals of 5 or 10 miles. These are housed in boxes large enough to contain several vacuum tubes and associated equipment. But the advent of transistors promises to change this situation. W. H. Doherty, Bell Labs., during his testimony in the Theatre Television hearing in Washington showed the FCC an experimental coax amplifier compressed to the almost unbelievable dimensions of a metal tube ⅛ in. in diam-

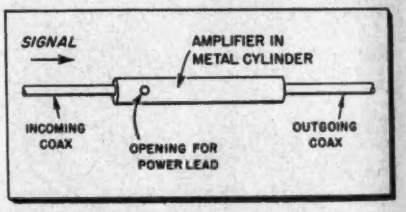

Coax tetrode transistor amplifier is housed in metal tube measuring ⅛-in. wide and 1½ in. long. In volume this is equivalent to a stack of about four paper clips.

eter and 1½ in. long, equal in volume to a stack of four paper clips!

A tetrode (4-electrode) transistor was used to secure the following excellent performance: gain 22 db; response flat to within 0.1 db from 0.4 MC to 11 MC. Coax having an outside diameter of 100 mils can be cut at ⅓-mile intervals and one of these midget repeaters can be inserted by pushing the coax into the input and output ends respectively of the little metal cylinder which houses: a transistor, an input and an output transformer, diode-type voltage stabilizers, two terminal boards, resistors, capacitors and provision for negative feedback!

From an operating point some miles away can be fed the only power required, 22½ v., 5 ma. This is supplied by a single insulated wire lying alongside the coax, the sheath of which forms the battery return circuit. The insulated wire enters the amplifier through a small hole in the side of its tiny cylindrical housing.

New TV Station Timetable

Geographical listing of new outlets for which "post-freeze" FCC grants and construction permits have been issued through February 9, 1953

State and City	Call Letters	Channel No.	Date On Air
ALABAMA			
Birmingham	WJLD-TV	48	•
Birmingham	WSGN-TV	42	•
Gadsden	WTVS	21	4/53
Montgomery	WCOV-TV	20	3/53
ARIZONA			
Tucson	KVOA-TV	4	2/53
Tucson	KCNA-TV	9	•
ARKANSAS			
Ft. Smith	KFSA-TV	22	5/53
Little Rock	KRTV	17	4/53
Little Rock	KETV	23	•
CALIFORNIA			
Bakersfield	KAFY-TV	29	4/53
Fresno	KMJ-TV	24	5/53
Los Angeles	KPIK	22	5/53
Los Angeles (NCE)	KUSC-TV	28	•
Salinas	•	28	•
San Bernardino	KITO-TV	18	10/53
Santa Barbara	KEYT	3	5/53
Stockton	KTVU (TV)	36	9/53
COLORADO			
Colorado Springs	KRDO-TV	13	4/53
Denver	KDEN	26	Spring
Denver	KIRV	20	•
Pueblo	KCSJ-TV	5	3/53
Pueblo	KDZA-TV	3	2/53
CONNECTICUT			
Bridgeport	WICC-TV	43	2/53
Bridgeport	WSJL	49	2/53
Bridgeport (NCE)	•	71	•
Hartford (NCE)	•		•
New Britain	WKNB-TV	30	•
New London	WNLC-TV	26	8/53
Norwich (NCE)	•	•	•
Waterbury	WATR-TV	53	3/53
FLORIDA			
Ft. Lauderdale	WITV	17	•
Ft. Lauderdale	WFTL-TV	23	4/53
Lakeland	WONN-TV	16	•
Pensacola	WPFA	15	6/53
St. Petersburg	WSUN-TV	38	5/53
West Palm Beach	WIRK-TV	21	6/53
IDAHO			
Boise	KIDO-TV	7	7/53
Boise	KGEM-TV	9	Fall
ILLINOIS			
Belleville	WTVI	54	5/53
Chicago	WHFC-TV	26	•
Danville	WDAN-TV	24	12/53
Decatur	WTVP	17	7/53
Peoria	WTVH-TV	19	•
Rockford	WTVO	39	4/53
INDIANA			
Lafayette	WFAM-TV	59	5/53
Muncie	WLBC-TV	49	3/53
IOWA			
Fort Dodge	•	21	•
Sioux City	KWTV	36	•
Sioux City	KVTV	9	4/53
KANSAS			
Hutchinson	•	12	•
Manhattan (NCE)	KSAC-TV	8	•
KENTUCKY			
Ashland	WPTV	59	7/53
Henderson	WSON-TV	50	5/53
Louisville	WKLO-TV	21	Spring
Louisville	WLOU-TV	41	•
LOUISIANA			
Baton Rouge	KHTV	40	•
Lake Charles	WTAG (TV)	25	6/53
Monroe	KNOE-TV	8	4/53
Monroe	KFAZ-TV	43	5/53
MARYLAND			
Baltimore	WITH-TV	60	•
Frederick	WFMD-TV	62	•
MASSACHUSETTS			
Fall River	WSEE-TV	46	5/53
New Bedford	WNBH-TV	28	2/53
Northampton	WACE-TV	36	•
Springfield-Holyoke	WWLP	61	2/53
Springfield-Holyoke	WHYN-TV	55	3/53
MICHIGAN			
Ann Arbor	WPAG-TV	20	3/53
Battle Creek	WBKZ-TV	64	5/53
Battle Creek	WBCK-TV	58	8/53
East Lansing	WKAR-TV	60	8/53
Flint	WCTV	28	Spring
Flint	WTAC-TV	16	•
Jackson	WBIM-TV	48	•
Kalamazoo	WKMI-TV	36	•
Muskegon	WTVM	35	•
Saginaw	WKNX-TV	57	3/53
MINNESOTA			
Duluth	KFTV	38	3/53
Rochester	KROC-TV	10	4/53
St. Cloud	WJON-TV	7	•
MISSISSIPPI			
Jackson	WJTV	25	•
Meridian	WCOC-TV	30	•
MISSOURI			
Columbia (NCE)		8	•
Festus	KACY-TV	14	6/53
Kansas City	KCTY	25	7/53
St. Joseph	KFEQ-TV	2	4/53
St. Louis	KSTL-TV	36	•
Springfield	KTTS-TV	10	3/53
Springfield	•	3	•
MONTANA			
Billings	•	8	•
Butte	KOPR-TV	4	•
Great Falls	KFBB-TV	5	•
NEBRASKA			
Lincoln	KOLN-TV	12	2/53
Lincoln	KFOR-TV	10	4/53
NEVADA			
Reno	KZTV	8	3/53
NEW JERSEY			
Asbury Park	WCEE-TV	58	Late '53
Atlantic City	•	52	•
New Brunswick (NCE)	WTLV	19	•
NEW MEXICO			
Roswell	•	8	•
Santa Fe	•	2	•
NEW YORK			
Albany (NCE)	WRTV	17	•
Binghamton (NCE)	WQTV	46	•
Buffalo (NCE)	WTVF	23	•
Buffalo	WBUF	17	4/53
Buffalo	WBES-TV	59	9/53
Elmira	WTVE	24	3/53
Ithaca (NCE)	•	14	•
Ithaca	WHCU-TV	20	11/53
Jamestown	WJTN-TV	58	•
Kingston	WKNY-TV	66	•
N. Y. City (NCE)	WGTV	25	•
Poughkeepsie	WEOK-TV	21	12/53
Rochester (NCE)	WROH	21	•
Syracuse (NCE)	WHTV	43	•
Watertown	WWNY-TV	48	•
NORTH CAROLINA			
Asheville	WISE-TV	62	4/53
Greensboro	WCOG-TV	57	•
Raleigh	WETV	28	4/53
NORTH DAKOTA			
Fargo	WDAY-TV	6	•
OHIO			
Akron	WAKR-TV	49	Winter
Dayton	WIFE	22	7/53
Lima	WLOK-TV	73	3/53
Lima	WIMA	35	Summer
Massillon	WMAC-TV	23	3/53
Sandusky	WLEC-TV	42	12/53
Warren	WHHH	67	•
Youngstown	WUTV	21	7/53
Youngstown	WFMJ-TV	73	Early '53
Youngstown	WKBN-TV	27	•
Zanesville	WHIZ-TV	50	4/53
OKLAHOMA			
Lawton	KSWO-TV	7	3/53
OREGON			
Salem	•	24	•
PENNSYLVANIA			
Altoona	WFBG-TV	10	2/53
Bethlehem	WLEV-TV	51	•
Easton	WEEX-TV	57	Spring
Harrisburg	WHP-TV	55	4/53
Harrisburg	WTPA (TV)	71	•
Hazelton	WAZL-TV	63	•
Johnstown	WARD-TV	56	•
New Castle	WKST-TV	45	2/53
Philadelphia	WIP-TV	29	•
Pittsburgh	WENS	16	8/53
Pittsburgh	WTVQ	47	8/53
Pittsburgh	WKJF-TV	53	5/53
Reading	WEEU-TV	33	5/53
Scranton	WTVU	73	3/53
Scranton	WGBI-TV	22	4/53
Wilkes-Barre	WILK-TV	34	•
Williamsport	WRAK-TV	36	•
York	WNOW-TV	67	4/53
SOUTH CAROLINA			
Charleston	WCSC-TV	5	4/53
Columbia	WNOK-TV	49	4/53
Columbia	WCOS-TV	25	Spring
Greenville	•	23	•
SOUTH DAKOTA			
Sioux Falls	KELO-TV	11	3/53
TENNESSEE			
Chattanooga	WTVT	43	3/53
Chattanooga	WOUC	49	•
Johnson City	•	11	•
Memphis	•	13	•
TEXAS			
Amarillo	KGNC-TV	4	3/53
Amarillo	KFDA-TV	10	3/53
Austin	KCTV	18	•
Austin	KTVA	24	•
Beaumont	KBMT	31	5/53
Dallas	•	23	•
El Paso	KEPO-TV	13	4/53
Galveston	KGUL	11	3/53
Galveston	KTVR	41	•
Houston (NCE)	KUHT	8	5/53
Houston	•	23	•
Houston	KNUZ-TV	39	7/53
Lubbock	KCBD-TV	11	4/53
San Angelo	KTXL-TV	8	•
San Angelo	KGKL-TV	3	•
Temple	•	6	•
Tyler	•	19	•
Waco	KANG-TV	34	6/53
Wichita Falls	KTVW	22	4/53
Wichita Falls	KFDX-TV	3	3/53
Wichita Falls	KWFT-TV	6	3/53
VIRGINIA			
Charlottesville	•	64	•
Danville	WBTM-TV	24	•
Lynchburg	WWOD-TV	16	•
Roanoke	WROV-TV	27	•
WASHINGTON			
Bellingham	KVOS-TV	12	5/53
Spokane	KXLY-TV	4	•
Tacoma	KTNT-TV	11	•
Tacoma	KMO-TV	13	5/53
Yakima	KIMA-TV	29	5/53
Yakima	KIT-TV	23	7/53
WISCONSIN			
Appleton	WNAM-TV	42	9/53
Green Bay	WBAY-TV	2	•
Madison	WKOW-TV	27	6/53
Madison	•	33	6/53
Neenah	WNAM-TV	42	Fall
Oshkosh	WOSH-TV	48	4/53
WYOMING			
Cheyenne	KFBC-TV	5	•
HAWAII			
Honolulu	KAMI	11	Early '53
PUERTO RICO			
San Juan	WKAQ-TV	2	Late '53

* Information not available at press time.
(NCE) Noncommercial educational station

NEW TV STATIONS on the AIR

State and City	Call Letters	Channel No.	Date On Air
ALABAMA			
Mobile	WKAB-TV	48	12/52
Mobile	WALA-TV	10	1/53
ARIZONA			
Tucson	KOPO-TV	13	2/53
COLORADO			
Colorado Springs	KKTV	11	12/52
Denver	KBTV	9	10/52
Denver	KFEL-TV	2	7/52
ILLINOIS			
Peoria	WEEK-TV	43	1/53
INDIANA			
South Bend	WSBT-TV	34	12/52
LOUISIANA			
Baton Rouge	WAFB-TV	28	1/53
MAINE			
Bangor	WABI-TV	5	2/53
NEW JERSEY			
Atlantic City	WFPG-TV	46	12/52
OREGON			
Portland	KPTV	27	9/52
PENNSYLVANIA			
Reading	WHUM-TV	61	2/53
Wilkes-Barre	WBRE-TV	28	1/53
York	WSBA-TV	43	12/52
TEXAS			
Austin	KTBC-TV	7	11/52
El Paso	KROD-TV	4	12/52
El Paso	KTSM-TV	9	1/53
Lubbock	KDUB-TV	13	11/52
VIRGINIA			
Lynchburg	WLVA-TV	13	2/53
Roanoke	WSLS-TV	10	12/52
WASHINGTON			
Spokane	KHQ-TV	6	12/52
HAWAII			
Honolulu	KGMB-TV	9	12/52
Honolulu	KONA	11	11/52

WASHINGTON
News Letter

Latest Radio and Communications News Developments Summarized by TELE-TECH's Washington Bureau

FRANK PLANS—As had already been forecast in this column, the FCC in its future proceedings on major policy determinations will not allow time-consuming presentations of testimony and self-serving blue-printing of plans by proponents for new communications and television services such as prolonged interminably the color television case. This new FCC procedure was exemplified in the theater television issue when the Commission ordered the motion picture industry to answer eight questions to give the specific plans for their establishment of the theater TV service. The FCC ordered the answers so the regulatory agency could decide "whether to proceed further with this hearing" and whether the continuance of the proceeding with the rather nebulous plans of the film industry "would serve any useful purpose."

BED-ROCK FUNDAMENTALS—There are three choices for the FCC, it is regarded, for the continuance of its deliberations on the theater TV issue. The Commission could dismiss the motion picture industry petition, or continue the hearing in its present form, or—the most likely course—the hearing procedure should be recast into the delineation of its bed-rock fundamentals. The FCC directed the counsel for the motion picture industry and the film theaters to submit their intentions on why if common carrier facilities like those of the Bell System were used it was not feasible to operate on the already allocated common carrier frequencies instead of sharing the industrial services spectrum space; under what concept the theater TV service would be established as an industrial service; the extent of the frequencies sought by the theater industry; the entire costs of the theater TV service so as to determine the ultimate cost of admission to the film theater patron; the percentage of time on a day-by-day basis of the proposed service; and if programs of only live interest will be provided over theater TV.

SLOW APPOINTMENT—Because of the more urgent national and international problems, together with the selection of the major appointments, President Eisenhower had not designated the new FCC Commissioner to replace appointee Eugene H. Merrill up to the press deadline of TELE-TECH. In fact there had been no appointments of commissioners to any of the administrative or regulatory agencies such as the Interstate Commerce Commission, Federal Power Commission, Securities and Exchange Commission and similar governmental units since the selections for the higher level posts in the departments and agencies were being carefully scrutinized for the best possible choices and President Eisenhower has taken on the added duty of interviewing each appointee personally. Commissioner Rosel H. Hyde still was out in the front as the President's probable choice for the FCC Chairmanship, because of the overwhelming support from all segments of the communications, broadcasting-television and electronics industries.

MAY BE DROPPED—The revocation of the grand jury authorization in the criminal anti-trust allegations against twenty radio-television-electronics manufacturing companies which was the final official act of the Truman Administration's Attorney General McGranery was felt to augur the dropping of the entire anti-trust suit even under civil litigation. Launched mainly because of the color television controversy with implications that some manufacturers had banded together in concerted action against the FCC-proposed color video equipment standards, the suit had been a rather definite deterrent in the full production by the electronics industry for the defense mobilization program. It also was a hurdle for progress in the goal of public color television and with the litigation out of the way color TV can now progress rapidly. Like similar rather useless anti-trust litigation the case had caused the manufacturers and the Radio-Television Manufacturers Association to make substantial expenditures of funds and personnel working time to compile data and reports, particularly on patent practices, sought by the Department of Justice attorneys. The Radio Corporation of America particularly had been called upon to furnish voluminous reports on its patent practices and policies.

INDUSTRIAL RADIO GROUP—Between 1100 and 1200 licensees in the rapidly-growing special industrial mobile radio services were called upon to establish an organization in that field at a meeting Feb. 18-19 at St. Louis. The association is to work to prevent any possible encroachment by other radio users upon the presently allocated frequencies for the special industrial radio services. In addition, the newly-formed association plans to coordinate the assignment of present frequencies allocated to the service to insure equitable distribution and minimum interference.

National Press Building
Washington, D. C.

ROLAND C. DAVIES
Washington, Editor

CONSULT CINCH

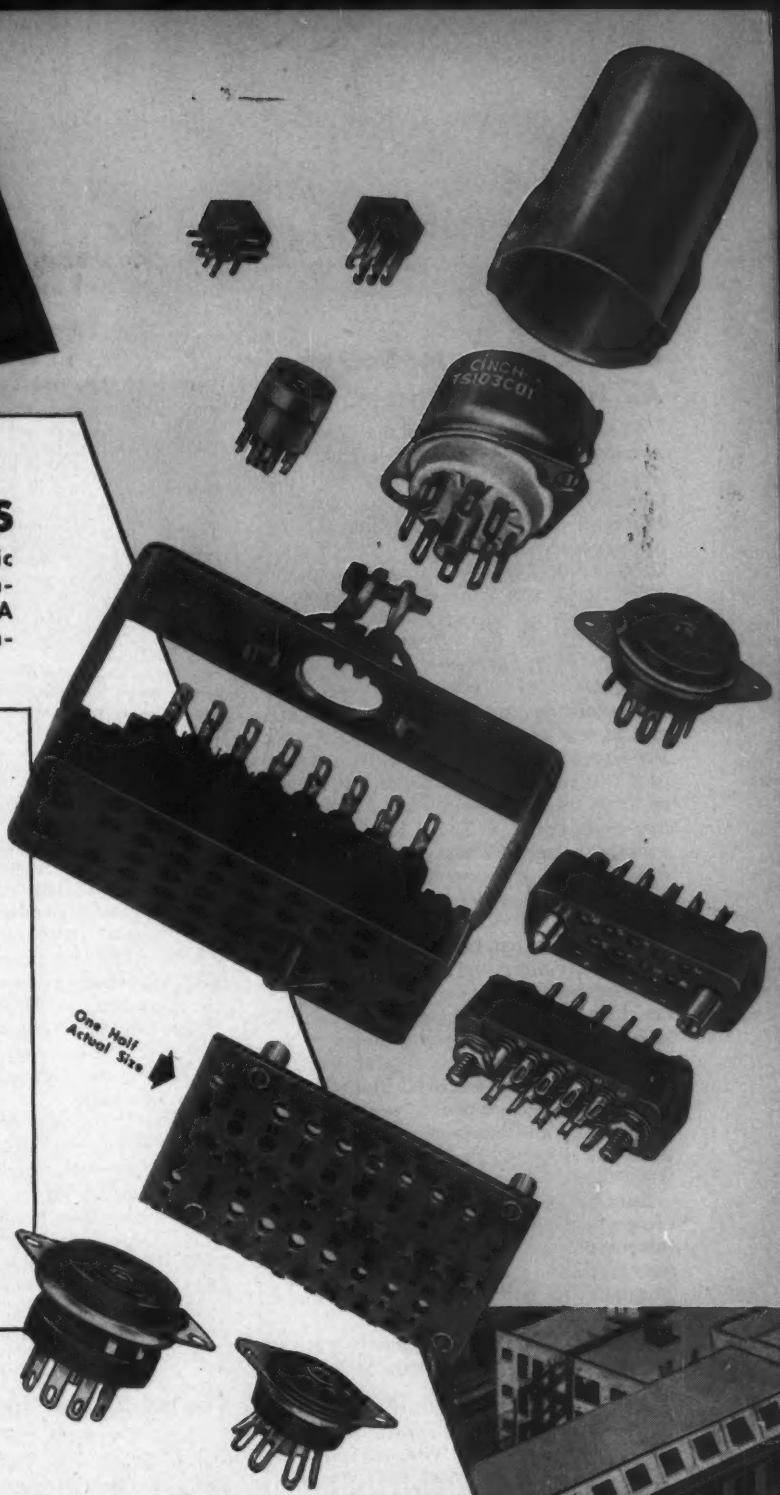

METAL PLASTIC ASSEMBLIES

To produce the intricate assemblies of metal and plastic so essential in gear of all kinds, facilities include a combination of metal stamping and plastic production. A highly trained staff is available for any military or commercial requirement.

The list below comprises the products of both Cinch and Howard B. Jones Division. They are indicative of their wide scope and also indicate the myriad of variations and redesigning that are possible with this background of production experience.

SOCKETS: Tube (Receiver, Transmitter and Special): Battery, all types • C-R Tube • Crystal • Electrolytic • Glass Type; 4 to 7 prong laminated • Infra-red Ray Tube • High Altitude Airborne Types • Kinescope; Magnal, Duodecal, Diheptal • Loktal-Miniature-Multiplug-Noval-Octal (Molded bakelite, steatite, teflon, Kel-F and laminated) • Plexicon • Printed Circuit • Special Sockets to Specs • Sub-Miniature; Hearing Aid Types • TV; 110V Circuit Breakaway • Vibrator • Pencil Tube Transistor • Diode

ANTENNA JACKS
BANANA PINS AND JACKS
BARRIER TERMINAL STRIPS
FANNING STRIPS
BATTERY PLUGS & SOCKETS
BINDING POSTS
DIODE SOCKET
CONNECTORS, MULTI CONTACT
FUSE STRIPS, BLOCKS & BOARDS
GRID CAPS
GRID CAP SHIELDS
HERMETICALLY SEALED TUBE SOCKETS
METAL STAMPINGS
MICRO-CONNECTORS
MOUNTING DEVICES
PHONO TIP JACKS
PRINTED CIRCUIT, CONNECTORS
SHIELDS, TUBE-MINIATURE & NOVAL & BASES SOLDERING LUGS—200 VARIATIONS
STRAP NUTS
TRANSISTOR SOCKET
TUBE HOLDERS—SPRING TYPE
VIBRATOR PLUGS AND SOCKETS

TERMINAL ASSEMBLIES: Blocks, boards in laminated and molded, assembled with lugs, pins, screw terminals, contacts, clips, turret lugs and other hardware to specifications.

AT THE IRE-NATIONAL CONVENTION:
BOOTH No. 505 & 506

Cinch
ELECTRONIC COMPONENTS

CINCH MANUFACTURING CORPORATION

1026 South Homan Ave., Chicago 24, Illinois

Subsidiary of United-Carr Fastener Corporation, Cambridge Mass

t electronic com-
nent jobbers —
ywhere.

TELE-TECH's NEWSCAST

OARAC Computer Solves Air Force Problems

The OARAC (Office of Air Research Automatic Computer) is a serial, decimal, single address machine built by General Electric for use at Wright-Patterson Air Force Base for solving problems in aircraft design, guided missiles and ballistics. It has a magnetic tape input and output, and magnetic drum internal memory.

The computer has a 10,000-word memory, one of the largest in use. A single magnetic head per track is used both for recording and playing back. There are 50 sets of four parallel tracks with 200 words on each set. A word consists of a 10-decimal digit number, plus sign, or of a two-digit operation code and five-digit address. The arithmetic unit contains a serial adder and three vacuum tube storage registers.

The control unit consists of two address registers, one containing the address of the instruction being performed, and other containing the address of the number being recorded into or played back from the memory. Serial addition time is 83 sec. Maximum access time, however, is 17 milliseconds and because this is a single address machine, it cannot be programmed to perform faster than 8.5 milliseconds or 110 operations per second. Basic repetition rate is 150 KC.

Information is fed into and out of the computer on magnetic tape. A piece of information on tape consists of a word plus its address in the internal memory. The tape preparation unit has a standard electric typewriter.

Errors due to faulty programming, or a single transient failure, can be detected by the feature of rollback built into the machine. At any point the programmer can perform a check either by programming by two different methods and comparing results or by leading to some known result. If the check is satisfactory, the computer proceeds to the next operation; otherwise it returns to the preceding check point and performs all operations over again. This can happen two times at any check point, the third time the computer gives up and rings an alarm.

For all of its complexity, components have kept to a minimum. The main part of the computer, made up of most of the standard plug-in units, is housed in a single cabinet approximately 16 x 2.5 x 7 ft. It contains approximately 1,400 tubes, 1,000 plug-in turrets, and 7,000 germanium diodes. Excluding inscriber-outscriber, OARAC requires 100 sq. ft. of floor space. Power required is 20 kw.

"OARAC's" memory drum is capable of holding pulses representing 10,000 10-decimal numbers and in operation it whirls at 3500 rpm rate.

Sound Recording Contest

Audio Devices, Inc., manufacturers of Audiodiscs and Audiotape, have announced the opening of a cash prize contest, with awards totaling over $1,000.00, for the fourteen best articles on the use of tape and disc recording in the modern radio station, TV station or recording studio. The following prizes are offered:

One First Prize $250.00
Three Second Prizes ... 100.00 each
Ten Third Prizes ..... 50.00 each

In addition, $25.00 will be given to the author of any other contest article published in whole or in part in Audio Record or any other Audio Devices publication.

Entries should be addressed to: Sound Recording Contest Audio Devices, Inc., 444 Madison Ave., New York 22, N. Y. To be eligible for the contest, entries must be postmarked not later than midnight, May 1, 1953.

WESCON CHAIRMANSHIPS ANNOUNCED

Four project committee chairmen for the 1953 Western Electronic Show and Convention (Aug. 29-31) have been selected. Bernard Oliver (upper left), research director of Hewlett-Packard Co., will head the papers committee. Wilson Pritchett, (2nd from left) will head the arrangements committee. Les Hogan (3rd from left) is chairman of the Hotels Committee and David Ross (extreme right) heads visitor's service.

IRE Appointments

The Board of Directors of the IRE has appointed six officers and directors for the year 1953. Haraden Pratt, telecommunications advisor to the President, was reappointed Secretary of the Institute, a post he has held since 1943. W. R. G. Baker, vice president of GE, was appointed Treasurer for the third successive year. Alfred N. Goldsmith was appointed Editor, an office he has held since the IRE was founded in 1912. Appointed as directors for 1953 were Ralph D. Bennett, Naval Ordnance Lab.; William R. Hewlett, Hewlett Packard Co.; and Arthur V. Loughren, Hazeltine Electronics Corp.

First Commercial Application of Transistors

After one year of pilot production, Raytheon Manufacturing Co., Waltham, Mass. now reports that it has swung into large-scale production of junction transistors and is presently shipping tens of thousands of the units each month to more than 15 hearing aid manufacturers. These germanium transistors, selling to the hearing aid firms for about $8 each, are expected to replace vacuum tubes, thereby improving performance, permitting smaller designs, and eliminating the expense of repeated battery replacements by about 90%. The compact junction transistors are only 0.035 cu. in. in volume and weigh 0.033 oz. According to Norman B. Krim, Vice President and General Manager of Raytheon's Receiving Tube Div., since 1939 Raytheon has produced 75% of the vacuum tubes used in hearing aids. With 10,000 of its 21,000 employees (including 3,500 engineers) in this division which produces transistors, the firm is stepping up production of thousands of engineering samples for other commercial and military accounts.

TRU-OHM

Power Rheostats

NOW Available!

50 watt - 75 watt - 100 watt - 150 watt
(25 watt available shortly)

Special Features:

- ★ tapered windings
- ★ switch combinations
- ★ off positions
- ★ special shaft assemblies
- ★ tandem assemblies

May we have your prints for quotations and sampling? Prompt and courteous service assured.

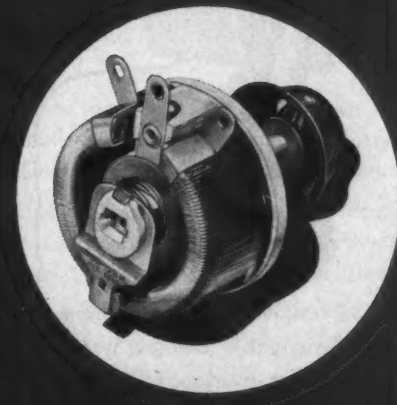

delivery

we guarantee immediate delivery regardless of quantity, value and size.

price

we guarantee that our prices will always save you money.

quality

we guarantee our engineering techniques and selection of materials will provide the finest products available.

approval

we guarantee to meet the requirements of the most rigid specifications.

TRU-OHM RHEOSTATS and RESISTORS are approved by the foremost manufacturers for civilian and government applications.

TRU-OHM VITREOUS ENAMELED RESISTORS
— A complete line ready for shipment!

TRU-OHM **PRODUCTS**
Division of Model Engineering & Mfg., Inc.
2800 N. Milwaukee Avenue, Chicago 18, Ill.
Factory: Huntington, Indiana

SOLVE THE PROBLEM OF
OVERLOADED
SWITCHBOARDS

Quickly...
Easily...
Install
WHEELER
SOUND POWERED
Electric
TELEPHONES

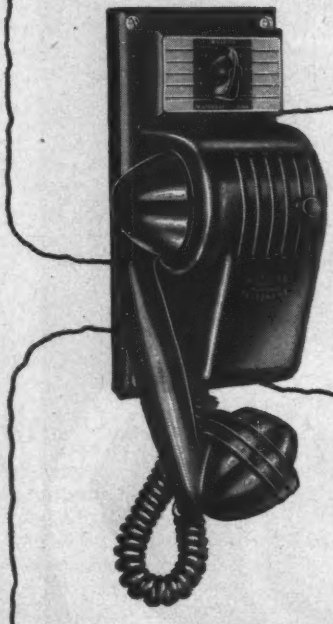

Up to 12 frequently-called locations on this dependable intercom system will save your overloaded switchboard for urgent calls... save both time and money. NO BATTERIES ...NO OUTSIDE POWER... NOTHING TO REPLACE OR MAINTAIN. Free from electrical hazards. Ideal EMERGENCY standby. Meets many SPECIAL needs. Write now for full details.

the WHEELER
INSULATED WIRE CO., INC.
DIVISION OF THE SPERRY CORP

1107 EAST AURORA STREET
WATERBURY, CONNECTICUT

CUES for BROADCASTERS

(*Continued from page 87*)

it may be possible to use the audition bus for the talk back in connection with a high gain preamplifier inserted between the talk back input, and the audition mixer bus. Or it can be used to over-ride the program on the normal monitoring amplifier if amplifiers are at a premium.

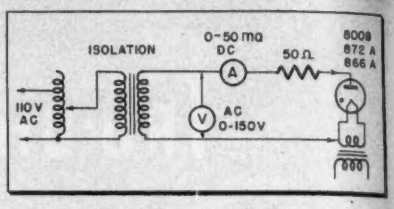

Checking Rectifiers

LEO WILSON, Chief Engineer, WHOP, Hopkinsville, Ky.

LOSS of program time due to rectifier arc-back can be minimized by making a monthly check of each rectifier tube and recording the results. A tube which is deteriorating will require progressively higher voltage for breakdown and will fire later in the conducting half-cycle. A simple test circuit can check each rectifier tube.

An isolation transformer, and a variable auto transformer, which will give an output adjustable from 0 to 75 v., are needed. Connect a voltmeter across this winding. In series with this winding, connect a 50 ohm current-limiting resistor, a 50 ma. dc meter, and the tube to be tested. To test the tube, slowly increase the applied voltage from zero to the point where dc current just begins to flow. The peak value of the RMS voltage read by the voltmeter at this point is the initial breakdown voltage. The peak breakdown voltage for a good tube will average 10 to 15v. When the peak breakdown voltage reaches 30 v., the tube should be tested at more frequent intervals. A value of 50 v. will generally indicate that it should be replaced.

Reel Identification

ERWIN P. SCHOENY, Chief Engineer, WGBF-WMLL. Evansville, Ind.

RECENTLY at WGBF-WMLL we purchased the large hub type of recording tape. Having several dozen reels of the small diameter tape in use, we were faced with the problem of keeping the two types of tape separated.

We solved this problem by marking the newer reels. This was accomplished by painting a red stripe on each of the spokes on both sides of the reel. We used red nail polish, diluted to the proper consistency for easy application with nail polish remover.

We carry one of each size take-up reel with the equipment and personnel are instructed to match the supply and take-up reel as to color of spokes, thus avoiding intermixing of tapes.

Tape delay system allowing fifteen minute delay on a two-hour program, designed by William McDonald, Chief Engineer, CKRM, Regina, Saskatchewan, Canada.

here are the

30 BEST SELLING RECORDS OF 1952*

29 of them used audiodiscs® for the master recording

Record, Artist & Label	Made from Audiodisc Master
BLUE TANGO *(Leroy Anderson—Decca)*	✓
WHEEL OF FORTUNE *(Kay Starr—Capitol)*	✓
CRY *(Johnnie Ray—Okeh)*	✓
YOU BELONG TO ME *(Jo Stafford—Columbia)*	✓
AUF WIEDERSEH'N, SWEETHEART *(Vera Lynn—London)*	
I WENT TO YOUR WEDDING *(Patti Page—Mercury)*	✓
HALF AS MUCH *(Rosemary Clooney—Columbia)*	✓
WISH YOU WERE HERE *(Eddie Fisher—Hugo Winterhalter—Victor)*	✓
HERE IN MY HEART *(Al Martino—BBS)*	✓
DELICADO *(Percy Faith—Columbia)*	✓
KISS OF FIRE *(Georgia Gibbs—Mercury)*	✓
ANY TIME *(Eddie Fisher—Hugo Winterhalter—Victor)*	✓
TELL ME WHY *(Four Aces—Decca)*	✓
BLACKSMITH BLUES *(Ella Mae Morse—Capitol)*	✓
JAMBALAYA *(Jo Stafford—Columbia)*	✓
BOTCH-A-ME *(Rosemary Clooney—Columbia)*	✓
GUY IS A GUY *(Doris Day—Columbia)*	✓
LITTLE WHITE CLOUD THAT CRIED *(Johnnie Ray—Okeh)*	✓
HIGH NOON *(Frankie Laine—Columbia)*	✓
I'M YOURS *(Eddie Fisher—Hugo Winterhalter—Victor)*	✓
GLOW WORM *(Mills Brothers—Decca)*	✓
IT'S IN THE BOOK *(Johnny Standley—Capitol)*	✓
SLOW POKE *(Pee Wee King—Victor)*	✓
WALKIN' MY BABY BACK HOME *(Johnnie Ray—Columbia)*	✓
MEET MR. CALLAGHAN *(Les Paul—Capitol)*	✓
I'M YOURS *(Don Cornell—Coral)*	✓
I'LL WALK ALONE *(Don Cornell—Coral)*	✓
TELL ME WHY *(Eddie Fisher—Hugo Winterhalter—Victor)*	✓
TRYING *(Hilltoppers—Dot)*	✓
PLEASE, MR. SUN *(Johnnie Ray—Columbia)*	✓

**According to Retail Sales, as listed in THE BILLBOARD.*

. . . and over 43% used audiotape† for the original sound!

Like Audiodiscs and Audiotape, this record speaks for itself.

Of the thirty top hit records of the year, all but one were made from Audiodisc masters! And that *one* — a London Record — was made abroad.

It is significant, too, that the original recordings for over 43 per cent of these records were first made on Audiotape, then transferred to the master discs. This marks a growing trend toward the use of Audiotape for the original sound in the manufacture of fine phonograph records.

Yes — Audiodiscs and Audiotape are truly a record-making combination—in a field where there can be no compromise with Quality!

†Trade Mark

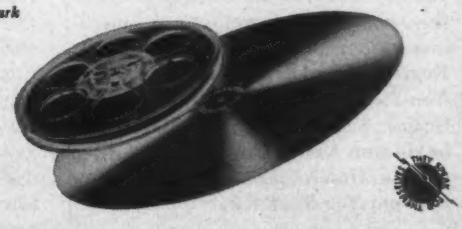

AUDIO DEVICES, INC.

444 MADISON AVE., NEW YORK 22, N. Y.
Export Dept.: 13 East 40th St., New York 16, N. Y. Cables "ARLAB"

Audiodiscs are manufactured in the U.S.A. under exclusive license from PYRAL, S.A.R.L., Paris.

audiodiscs • audiotape • audiofilm • audiopoints

Come again—

Television Men!

Welcome to the Radio Engineering Show —

March 23-26, 1953
at New York City

19 IRE Professional Groups have prepared skillfully organized symposia and technical sessions on all phases of radio, TV, and electronics. These papers will keep you up-to-the-minute on the developments which are to come in the next few years—for the IRE Convention Theme is:

Radio-Electronics
"A Preview of Progress"

The colorful Annual Meeting on Monday at 10 (opening morning) will feature the "Founders' Award". Social Events include the "Get Together Cocktail Party" Monday, and the Annual Banquet Wednesday, all at the Waldorf Astoria Hotel.

405 Exhibitors are using 58,680 square feet—the entire four floors of Grand Central Palace, to give you a "Preview of Progress" in the apparatus, components and instruments of Radio-Electronics. Registration: IRE Members $1.00, Non-Members $3.00. Register at Grand Central Palace, 47th & Lexington Avenue, or The Waldorf Astoria Hotel, 49th & Lexington Avenue, New York City.

THE INSTITUTE OF RADIO ENGINEERS

Tube Reliability

(*Continued from page* 79)

Resonant excitation of the grid structure as a whole, or of parts of a grid, may take place with either filamentary or cathode-type tubes. The frequency of these resonant modes for the grids of subminiature tubes goes from a few thousand cycles per second on into the supersonic range. Reduction of the troublesome electrical output can be obtained by raising the resonant frequency of the grid or by increasing the mechanical damping. Fortunately we gain in two ways by raising the resonant frequency; the amplitude of vibration, and consequently the electrical output, is reduced for the same excitation, and at the same time the frequency is shifting to a less objectionable portion of the spectrum for many applications.

Resonant excitation of the filamentary cathode is more pronounced than for the indirectly heated cathode. In the exchange, however, we have lost the vexing problem of adequate anchorage of the cathode to the mica without excessive heat loss. As with the grid structure, the best methods of reducing the resonant motion of the filament are by increased damping and higher resonant frequency. In the early days of filamentary tubes the recourse to high frequency resonance of the filament was not available because of the use of filaments having inherently low strength. With the successful production of many millions of subminiature tubes with oxide coated tungsten filaments, this limitation no longer exists. It is perfectly feasible with high production tubes such as the CK534AX and CK549DX to achieve filament resonant frequencies of 8,000 CPS and higher.

With forced vibration, such as the bending or flexing of the grid or filament at frequencies below resonance, the indicated corrective measures are adequate anchorage to the mica spacers and raising of the resonant frequency. As was noted previously, when a tube element is subjected to acceleration the resulting deflection is proportional to the fourth power of the length. This statement can be made even more general by saying that the resulting deflection, or the amplitude of the forced vibration, will be directly proportional to the acceleration and inversely proportional to the square of the resonant frequency. This is true regardless of whether the frequency is determined by the stiffness of the member itself, as with a grid, or by applied tension as with the filament. The constant of proportionality will, however, vary with the constraints.

Next to reduction of relative motion, the controlling factor in the reduction of vibration output is symmetry. Consider a tube with perfect symmetry with respect to the plane through the grid side-rods. The plate current to the right of this plane would be the same as the plate current to the left. If now, under conditions of vibration, the grid moves to the right with respect to the cathode, the grid-cathode spacing will increase for the right-hand side of the structure and the plate current to this side will ordinarily decrease. Simultaneously for the left-hand side of the structure the grid-cathode spacing will decrease and the plate current will increase. If the changes in the two halves of the plate current were exactly equal, the total plate current would be unchanged and hence the vibration output would be zero. The situation is the same as that of two identical vacuum tubes in a circuit with push-pull input and parallel output. In such a circuit, with a signal applied to the grids, if the two tubes had identical characteristics the fundamental and odd harmonic components of plate current would be zero. The output would be composed entirely of the even harmonic components introduced by the nonlinearity of the individual tubes. As the two tubes become unbalanced, corresponding to lack of symmetry in our vibration case, the fundamental component of plate current would soon become larger than all the harmonics. A like situation exists in our tube when vibrating, with symmetry between the two halves, the vibration output is very small and is made up entirely of even harmonics of the vibrating frequency. As we depart from symmetry the cancellation becomes less effective and the electrical output at fundamental vibrating frequency soon predominates. Through this mechanism, symmetry with respect to the central plane plays an important part in determining the magnitude of the vibration output of a tube whether vibrated at the resonant frequency of an electrode or under forced conditions below the resonant frequency of any of the elements.

For many years filamentary subminiature tubes were made with nickel filaments. For the past ten years, the trend has been toward the use of tungsten filaments so that now practically all the subminia-

(*Continued on page* 114)

Centralab Model 2 EXPRESS keeps you ahead on AM-FM-TV

Quick delivery *plus* these features make the Model 2 Express *the* control for you!

- **resistance range:** ½ megohm and 1 megohm ± 30%
- **taper:** Audio, Centralab C2
- **wattage rating:** ½ watt
- **voltage rating:** Tested to withstand 1000 volts rms
- **marking:** Control stamped with Centralab part number, resistance and taper; shaft stamped with shaft number (Except Number 1)
- **bushing:** ¼" long from mounting surface. ⅜" 32 NEF thd.
- **switch:** Single-pole, single-throw, rated 5 amps at 125 volts a-c. UNDERWRITERS APPROVED.
- **how to order:** Specify Centralab Express radiohm, maximum resistance desired (either ½ or 1 meg.) shaft length desired by number and/or length FMS. Specify quantity.

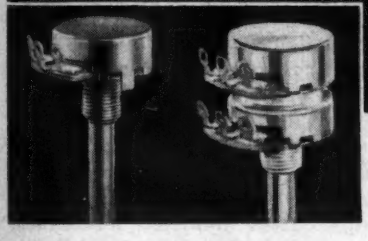

Typical Model 2 Radiohm control — only 15/16" dia., rated at ½ watt. Three basic switch ratings available 5, 8 and 1 amp, plus 8 switch combinations for real flexibility in application and design. Check No. 42-85 in coupon for more data.

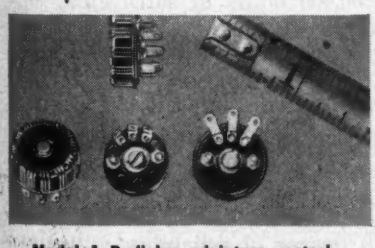

Model 1 Radiohm miniature control, rated 1/10 watt — plain and switch types. World's smallest volume control! Ideal for hearing aids, other miniature uses. New high-torque control now available — stands vibration to 3.0 ounce-inches. Check No. 42-158.

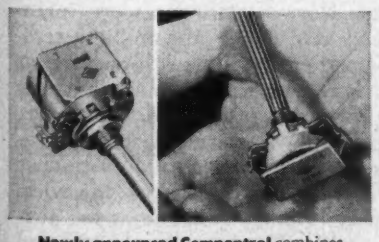

Newly announced Compentrol combines volume control and Printed Electronic Circuit. Equalizes bass and treble response at low volume. Furnished in ½ or 1 meg—plain or switch types. Check No. 42-182 in coupon for more details.

You can always count on Centralab's wide variety of standard and custom controls to meet commercial and government requirements

CENTRALAB'S newest — the Model 2 Express — is ideal for the manufacturer needing controls on extremely short notice. Unique time-saving feature simplifies shaft assembly requirements — control shaft fits all standard RTMA split-knurled and certain spring-type push-in knobs.

Shafts and controls are carried in stock at our plant. When your order is received, desired shafts are staked directly to controls. Control assembly arrives in *your* plant in just a few days! To help you plan, Centralab will even tell you approximate delivery *time in hours,* from the date your order is received.

The new Express is available in two values: ½ megohm and 1 megohm, audio taper (C2) with SPST a-c line switch. These two values meet 75% of requirements for switch-type controls. Flat shafts are stocked separately in 14 lengths ranging from ⅞" from mounting surface to 2½" fms in increments of ⅛". For complete details check No. 42-163 in coupon.

Centralab

A Division of Globe-Union Inc.
Milwaukee 1, Wis.
In Canada, 635 Queen Street East, Toronto, Ontario

Other famous Centralab plain or switch-type controls — standard or custom designs — with plain or dual concentric shafts are shown at left. They meet today's demand for smaller size, extra quality. Check coupon for more details. Manufacturer's samples on *all* controls on request.

MILITARY TYPES. If you use types RV2A or RV2B, Model 2 variable resistors on your next military order — there's no contractual approval or waiver required. They meet JAN-R-94, characteristic U requirements.

CENTRALAB Div. Globe-Union Inc.
938 East Keefe Avenue, Milwaukee 1, Wisconsin

☐ No. 42-85; ☐ 42-158; ☐ 42-182; ☐ 42-163. Please send the bulletins I've checked. ☐ I'd also like a copy of Centralab's new Catalog No. 28, listing more than 470 *new* items for the fast-changing electronic field.

Name.....Position.....

Company.....

Address.....

City.....Zone.....State.....

SERIES HV
Hi-Q® ceramic
capacitors*

Tiny, yet so mighty, in guarding against voltage breakdowns. Yes, special dielectric materials developed by ceramic pioneer-specialists do safeguard your circuitry, associated components, operational conditions, reputation.

The Hi-Q Series HV line includes extra-severe-service *slug type* ceramic capacitors in ratings up to 20,000 V. D. C. W.; *disks* up to 6,800; *tubulars* to 7,000; and high-voltage plates where cubical configuration permits greater space utilization.

*FUNCTION-FITTED:
Our engineers will gladly work with you in evolving the best engineering and economical solution of your ceramic-capacitor problem.
Literature on request.

FUNCTION FITTED

Hi-Q® DIVISION
AEROVOX CORPORATION
OLEAN, N.Y.

AEROVOX CORPORATION NEW BEDFORD MASS. WILKOR DIVISION CLEVELAND, OHIO
Export: 41 E. 42nd St., New York 17, N. Y. • Cable: AEROCAP, N. Y.
• In Canada: AEROVOX CANADA LTD., Hamilton, Ont. JOBBER ADDRESS: 740 Belleville Ave., New Bedford, Mass.

tures are using the oxide coated tungsten filament. The increased strength of the tungsten permits much higher filament tension to be used. This results in much higher resonant frequencies with the consequent reduction in microphonic output. The modern subminiature also uses shorter filaments and improved methods of controlling symmetry. All these factors contribute to the tremendous improvement that has taken place in the filamentary subminiature within the past few years. The over-all result is that several of the filamentary subminiatures now compare favorably with the cathode-type tubes. For example, when vibrated at 40 cps with an acceleration of 15 times gravity, tube types CK534AX and CK549DX give an output equivalent to a signal of only 200 μv at the grid.

Life Test Data

The performance of the filamentary subminiature on life test is well worth consideration. At Raytheon we have accumulated data on more than 27,000 filamentary subminiatures which were life-tested for periods ranging from 500 hours to 10,000 hours. Most of these tubes were operated for 500 hours and over 2,500 tubes were carried beyond 10,000 hours. To simplify the analysis the rejects have been arranged in three groups: glass failures, mechanical failures, and characteristic failures.

The results are shown in Tables I and II. Table I is the result of life tests on 27,260 tubes representing 13,500,000 hours of satisfactory operation. Table II represents 27,000 tubes carried to 500 hours, with some to 10,000 hours, totaling 47,000,000 tube hours of satisfactory operation.

This performance record, showing more than 50,000 hours of satisfactory operation for each failure shows that we already have a rather high degree of reliability with filamentary subminiature tubes as they are today. These tests were made, of course, under controlled operating conditions and limited environment. Normal voltages were maintained at all times, the ambient temperature covered the ordinary range of room temperature, neither shock nor vibration influenced the results. The scoring was carried out with respect to the particular performance for which the tube was intended, namely: voltage gain and power output with freedom from gas and leakage under normal operating conditions.

The electric motor is often cited

as an example of reliability. It certainly deserves this reputation when operated under appropriate conditions. Many motors are equipped with thermal overload devices to prevent sustained operation under improper conditions. We would hardly expect a motor to provide reliable operation under conditions of improper ventilation, overloading, and in particular operation at reduced line voltage while delivering full load.

Likewise with the vacuum tube, either filamentary or cathode-type, in order to obtain maximum reliability it is imperative that it be given the advantage of appropriate environment and electrical operating conditions. The life test record shows that the filamentary subminiature tubes of today provide reliability when given appropriate environment and electrical operating conditions. These tubes were handled many times in removal from the racks for repeated testing during the life test period. The filamentary subminiature tubes are notable for their ability to withstand severe shock. Surprisingly few changes were required to enable them to operate satisfactorily after undergoing an acceleration of 20,000 times gravity in the proximity fuse.

Future Problem

The problem for the future is to retain the reliability we now have and still meet additional requirements imposed by operation under conditions of shock, vibration, high ambient temperature, and abnormal electrical conditions. The solution to this problem will require progressive changes in tube design, materials, and processing. At the same time abnormal electrical operating conditions must either be avoided or the tube must be processed and tested with the abnormal condition in mind. Tubes are being improved constantly, particularly with respect to their ability to perform under conditions of severe vibration. In the meantime, for applications where either the environment or the operating conditions are unfavorable to the tubes as they are now made, a closer relationship between the user and the maker of tubes can be of utmost importance. Reliability can be best realized through the cooperative efforts of the tube design, process, and circuit engineers. The reliability of a system requires the proper tube for the application and the proper application for the tube.

This paper was first presented at the National Electronics Conference held in Chicago, Sept. 29-Oct. 1, 1952.

Made under Western Electric license agreement, these deposited-carbon resistors set a real need for laboratory-grade instruments and assemblies. For superior stability under the most adverse operating conditions, Carbofilm resistors are now available in hermetically-sealed metal casings with glass-to-metal end seals. Thoroughly protected — mechanically, electrically, climatically. Guaranteed tolerance of plus/minus 1%. Available in ½, 1 and 2 watt sizes. Just about everything a precision resistor should be!

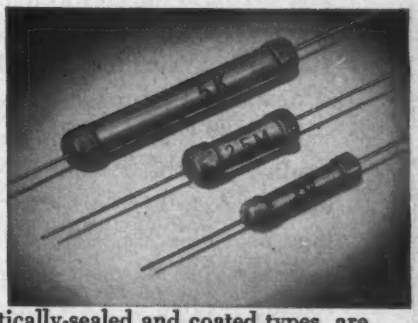

Also in the coated (special resin film seal) type for accuracy, stability, economy. Guaranteed tolerance of plus/minus 1%. Excellent characteristics. ½, 1 and 2 watt sizes.

Carbofilm resistors, in both hermetically-sealed and coated types, are available in standard values as well as special values made to your requirements. Literature on request. Let us quote on your *precision resistance* needs.

WILKOR DIVISION

AEROVOX CORPORATION

2882 Detroit Avenue, CLEVELAND, OHIO

AEROVOX CORPORATION NEW BEDFORD MASS. CLEAN, N. Y.

Export: 41 E. 42nd St., New York 17, N. Y. • Cable: AEROCAP, N. Y.

In Canada: AEROVOX CANADA LTD., Hamilton, Ont. JOBBER ADDRESS: 740 Belleville Ave., New Bedford, Mass.

Announcing the ML-6257

Another Machlett Contribution Toward Better, More Reliable Tubes for Industrial Service

ML-6257 is the latest addition to Machlett's line of tubes specially designed and processed for use in electronic heating equipment. It fulfills a long standing requirement for a long life tube which can safely provide 3 kw of heater output with reliability and economy.

ML-6257—with its companion tubes ML-6256 and ML-6258—makes available design and performance characteristics which provide a higher standard of value for all applications—including AM, FM & TV broadcasting.

ML-6257 is rated 5 kw plate dissipation with cooling provided through an integral anode water jacket. Type ML-6256 with the same ratings uses the Machlett automatic seal water jacket. Type ML-6258 designed for forced-air cooling is rated at 3 kw plate dissipation.

Phone, wire or write for more information—Machlett Field Engineers will be glad to assist in any tube application problem.

RATINGS AND CHARACTERISTICS

Electrical Data—General

Filament voltage	12.6 Volts
Filament current	27 Amps
Amplification Factor	21
Interelectrode Capacitances:	
Grid-Plate	20 uuf
Grid-Filament	22 uuf
Plate-Filament	0.7 uuf

Maximum Ratings—Class C Telegraphy
(Key down conditions per tube without modulation)

D-C Plate Voltage	5500 Volts
D-C Grid Voltage	—1500 Volts
D-C Plate Current	1.5 Amps
D-C Grid Current	.22 Amp
Plate Input	7 kW
Plate Dissipation	5 kW

Machlett Industrial and Broadcast Tubes will be exhibited at the 1953 I.R.E. Show, Booths 1-116 and 1-117

MACHLETT — OVER 50 YEARS OF ELECTRON TUBE EXPERIENCE

MACHLETT LABORATORIES, INC., SPRINGDALE, CONNECTICUT

H V Supply

(*Continued from page 96*)

justment is restricted to the primary tank circuit.

Fig. 6 shows the output characteristic for several different coefficients of coupling, including critical coupling. The dc output characteristic for critical coupling corresponds to the curve labeled $K_c = 0.03$. The other values of coupling in this plot are greater than K_c. Oscillator plate current is plotted to indicate the overall efficiency of the system as the parameter of coupling is varied. Examination of Fig. 6 shows that efficiency increases with increased coefficient of coupling, but the maximum dc output voltage shows little increase for K greater than 0.17. From the curves in Fig. 6, we are able to choose the optimum coupling for a particular value of L_{Prl} and L_{Sec}. Since the maximum output obtained is approximately equal for all values of K from 0.08 to 0.22, we can choose the output characteristic which is the most efficient and has the most desirable shape.

The maximum dc voltage output obtained at a coefficient of coupling greater than $K_c = 0.03$ corresponds to the lower-frequency resonant peak of an overcoupled circuit. This resonant peak occurs at a frequency below f_0, where f_0 is the resonant frequency of the secondary circuit in isolation. Operation at the lower-frequency resonant peak is more desirable than at the higher-frequency peak. This has been pointed out by several others who have investigated r-f type power supplies. [1,2]

Output Characteristics

The output characteristics in Figs. 4, 5, and 6 show some marked discontinuities which should not be confused with double-resonant phenomena of over-coupled circuits. As a matter of fact, the sharp dips in the curves are a function of the resonant frequency of the primary and harmonics present in the oscillator. For example, in Fig. 5, the first dip, at $C_{Prl} = 900$ μμf, is due to the presence of the second harmonic and at $C_{Prl} = 300$ μμf is due to the presence of the third harmonic. For these values of primary capacitance the primary tank is tuned to a frequency $2 \times f_0$ and $3 \times f_0$, respectively, in the absence of the secondary circuit. Since the tickler coil is coupled closely to the secondary the r-f oscillation frequency is very nearly f_0 (the resonant frequency circuit). However, there is some coupling be-

(*Continued on page 118*)

VISITING IRE ?

for something really new, see these...

- high-speed *magnetic tape handler*
- high-speed *"teledeltos" digital recorder*
- plug-in *decades, shift registers, frequency dividers*
- four all-new *frequency-time counters*
- multiple sequence *pre-determined counters*
- photo-electric *detectors*
- high resolution *8-mc chronograph*

let's talk about your application!

Let Potter experts analyze and simplify your work in any phase of counting, timing, frequency measurement, data handling or control. In a very few minutes of your time, we can show you how a standard, low-cost, time-saving Potter Instrument can be applied in your work program. Why not consult us?

staying home?

Write for our catalog covering operating principles and typical applications. There is a Potter Instrument ideally suited to your needs. ADDRESS DEPT. 3-J

Potter 104

POTTER INSTRUMENT COMPANY, INC.

115 CUTTER MILL ROAD GREAT NECK, NEW YORK

Another RAYPAR FIRST...

27" HORIZONTAL OUTPUT TRANSFORMER FOR 90° DEFLECTION ANGLE

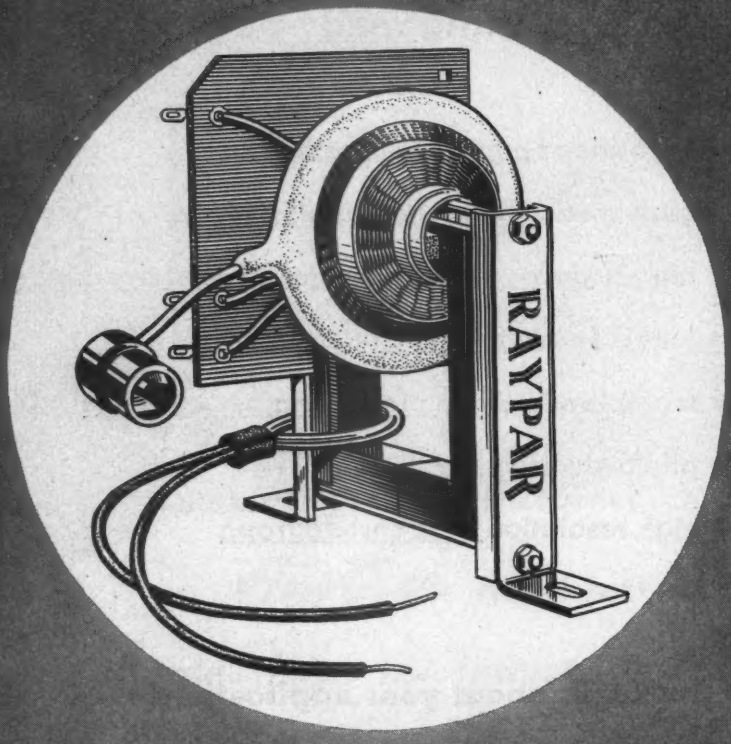

Raypar's newly developed 27" horizontal output transformer is a perfect example of RAYPAR'S electronic knowledge to produce uniform components of consistent quality for radio and television.

RAYPAR'S HORIZONTAL OUTPUT TRANSFORMER gives the following advantages:

(1) High efficiency drive circuit application.
(2) Output voltage . . . . . 18,000 volts.
(3) Full scan at low line voltages.
(4) Various types of mountings available.
(5) Always quality workmanship.

DEPENDABLE COMPONENTS INSURE QUALITY PRODUCTS

HORIZONTAL OUTPUT TRANSFORMER
DUO-DECAL SOCKET ASSEMBLY
HIGH VOLTAGE SOCKET ASSEMBLY
INTERLOCK CONNECTOR
CABLE ASSEMBLIES
I. F. TRANSFORMERS
WIDTH COILS
LINEARITY COILS
PIX I. F. COILS
H. F. PROBES • ATTENUATORS

RAYPAR incorporated

7800 WEST ADDISON STREET • CHICAGO 34, ILLINOIS

SERVING AMERICA'S LEADING RADIO & TV MANUFACTURERS

tween the primary tank and the tickler coil. Consequently, when the value of C_{Pr1} is such that L_{Pr1} and C_{Pr1} tune to a frequency 2 x f_0, the r-f voltage developed across the primary is predominantly at this higher frequency. This is similar to a class-C amplifier tuned to operate as a harmonic generator. Since the secondary tank is tuned to f_0 and is very selective, the output from the secondary is reduced at the points where the primary tank is resonant to a harmonic. Therefore, dips in the dc voltage output occur, corresponding to the second and third harmonics of f_0. When the primary is tuned to $2f_0$, an oscilloscope connected across the primary tank shows the magnitude of the second-harmonic voltage is greater than the voltage of the fundamental frequency. This is explainable from a viewpoint of a frequency-selective load.

Further Investigation

Further investigation of these dips in dc output was made by driving the r-f circuit of the power supply as a class-C amplifier from a separate class-C oscillator. This was done by disconnecting the tickler coil and introducing r-f directly to the grids of the type 815 tube and an adjustable bias arranged to similate normal operation of the oscillator. Output characteristics then were obtained by tuning C_{Pr1} for maximum output after making small changes in the driving frequency. The output characteristics of the power supply were found to be quite similar, including second and third harmonic dips, to those obtained with the r-f circuit connected normally.

An oscillator which obtains feedback voltage from the primary tank instead of the secondary can produce poor power-supply starting characteristics. This is due to a tendency for oscillations to build up at a frequency determined by the primary tank constants alone. When this occurs secondary loading is negligible and so is secondary output. To avoid this difficulty, the tickler coil must be coupled much more tightly to the secondary than to the primary. The oscillator grid-bias resistor should be kept small so that only the secondary tank circuit can provide sufficient feedback voltage to sustain oscillation.

1. R. S. Mautner and O. H. Schade, "Television High Voltage R-F Supplies," RCA Review, vol. VIII, no. 1, p. 43.

2. G. W. C. Mathers, "Some Additions to the Theory of Radio-Frequency High Voltage Supplies," Proc. IRE, vol. 37, no. 2, p. 199.

The Kyle Automatic Oil Circuit Recloser utilizes stringers made of Phenolite tubing, and a postformed Phenolite contact frame. Kyle selected Phenolite because it is a superior insulating material with great mechanical strength and is unaffected by oil.

National Laminated Plastics
nationally known—nationally accepted

PHENOLITE
Laminated PLASTIC

contributes to an improved product— in the Kyle Automatic Oil Circuit Recloser

This practical use of Phenolite by the Kyle Products Plant of the Line Material Company is typical of its countless applications in the electrical field. Phenolite, about one-half the weight of aluminum, is the perfect insulating material for high and low voltage applications. It possesses an unusual combination of properties. Phenolite has great mechanical strength and high resistance to moisture; ready machinability; is unaffected by solvents and oils.

It can be easily punched, sawed and sheared. The toughness and high impact strength of cloth base Phenolite sheet make it suitable for gears; it is one of the strongest materials per unit weight known.

Available in various grades and colors; and in sheets, rods, tubes and special shapes. Write for detailed literature and engineering information—

NATIONAL VULCANIZED FIBRE CO.

Wilmington Delaware

Offices in Principal Cities

Since 1873

ANALOG CORRELATOR

(*Continued from page 72*)

turn will trigger stage 2. Resetting of stage 4 by the fifth pulse will trigger stage 0 and the cycle will be repeated.

The output from each stage as it is reset triggers a blocking oscillator in each channel which provides the sampling pulse output for that channel.

B. Sampling Circuit: The sampling circuit[5] is designed to sample the input signal accurately during a 0.2 μsec period and to store the resulting value for 5000 μsec with less than 1% decay. This has been achieved by the circuit of Fig. 6.

The grid of the sampling tube (both sections of a type 5687 in parallel) is held cut off except during the occurrence of the 0.2-μsec sampling pulse, when the grid is driven positive. During this period the resistance offered by the tube is low enough to allow the cathode follower to charge the sampling capacitor to the voltage of the input signal. The sampling capacitor is charged through a 6AL5 diode because it has been found that this arrangement greatly reduces the leakage of the sampling capacitor to ground. The

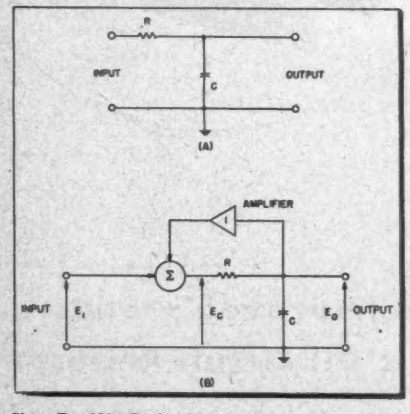

Fig. 7: (A) Basic RC integrator circuit and (B) integrator with amp and summing circuit

major factor responsible for this reduction is the larger cathode to heater resistance of the 6AL5 compared with the 5687.

To preserve the sample voltage it is necessary to charge a larger storage capacitor by means of a pulse stretching circuit. Two cathode followers in cascade are necessary in the pulse stretching circuit to prevent grid current flow from discharging the sampling capacitor. The resulting circuit then meets the required storage time specifications.

After the sample value has been used by the multiplying circuits, it is necessary to discharge the capacitors to prepare for obtaining the next sample. This is accomplished by connecting the ungrounded side of each capacitor to the plate of one section of a 12AU7 triode. The grids of these discharge tubes are held cut off except when it is desired to discharge the sampler. Then the grids are driven positive by a pulse for 30 μsec and the capacitors discharge through the low tube resistance to ground. The grids of the discharge tubes are then cut off and the circuit is ready to obtain the next sample.

C. Multiplier: Multiplication is

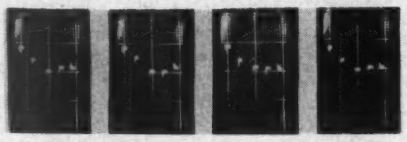

Fig. 8: Autocorrelation functions of 6D4 gas tube noise passed through low-pass RC filter

performed in each B-channel by modulating the amplitude of a rectangular pulse in proportion to the value of the A-channel sample, while the width of the pulse is modulated in proportion to the B-channel sample. The area of the pulse is then proportional to the product of the sample values plus a constant which is later subtracted. Integration of these pulses provides an output voltage proportional to the value of the desired point of the correlation function.

D. Integrator: A bootstrap type integrator circuit was developed to provide the long-time constant, freedom from drift and wide bandwidth necessary for accurate operation of this correlator. The theory of operation of this circuit is discussed in reference 6 where it is shown that if an amplifier having a gain K of nearly unity is supplied across the resistor of an RC integrating circuit, the resultant time constant is approximately RC/(1-K).

The operation of this circuit can be explained briefly as follows: The simple RC circuit of Fig. 7(A) would function as an integrator if its time constant could be made long enough. This cannot be done in practice since for accurate correlation a time constant of at least 200 seconds is required, whereas the maximum RC product realizable economically is about five seconds. The effect of having too small a time constant can be thought of in the following manner: As positive pulses are integrated, the voltage across the capacitor increases and effectively subtracts from the true voltage of the pulses. In addition, as the voltage across the capacitor increases the capacitor tends to discharge through the resistor R and the source resistance. These effects could be removed if the voltage level of the pulses at the input terminal of the integrator could be raised by the same amount as the output voltage across the capacitor. Then the effective voltage across resistor R would be the voltage of the input pulses, as it should be. This can be done with a unity gain amplifier and a summing circuit as indicated in Fig. 7(B). Since pulses are being integrated this summing can be effectively accomplished by using a diode clamping circuit. The RC time constant is entirely adequate to integrate accurately one individual pulse which averages only 200 microseconds in length. When the pulse ends, the clamping circuit makes E_c equal to E_o. This raises the input voltage level by the required amount.

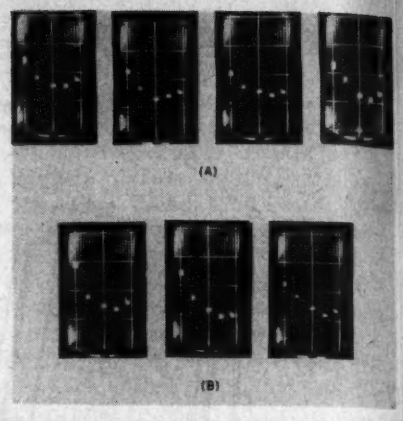

Fig. 9: Autocorrelations of (A) male and (B) female speech covering high frequency components show same general shape for same voice

Unity Gain Amplifier

The unity gain amplifier is realized by comparing E_o and E_c and using the difference as the input to a high gain, direct-coupled amplifier. The output of the amplifier is connected with the proper polarity to reduce this difference. This arrangement is equivalent to a high gain amplifier with unity-negative feedback. The resultant circuit has a gain of nearly unity when K is large. In this correlator an RC product of approximately 1 megohm times 1 μf is employed together with an amplifier gain of about 0.995 providing an overall time constant of 200 seconds.

It should be noted that this circuit is much less subject to drift than the conventional means of multiplying RC products with a Miller integrator. The reason is that the Miller circuit requires a high gain direct-coupled amplifier which does not have direct-coupled negative feed-

(*Continued on page 123*)

G-R T-V monitor for the VHF and UHF bands

Channels **2** *to* **83**

Memo to T-V Station Chief Engineers

SAT., FEB. 1 ... JAN. 11, 195

This instrument — the first UHF Monitor — is another example of the pioneering engineering, design and workmanship which has characterized G-R monitoring equipment since the beginning of broadcasting.

FEATURES

- *Continuous indication of percentage modulation and frequency deviation of aural and visual transmitters — large illuminated meter scales permit reading at a glance*
- *High Stability*
  Visual Monitor — ±500 cycles
  Aural Monitor — ±1000 cycles
  On all VHF channels, the above accuracy is guaranteed for at least thirty days — at the lower UHF frequencies (channel 14), the period is over sixteen days — on channel 83, the period is ten days or more
- *High-fidelity audio output for distortion and noise-level measurements, and for audio monitoring — residual noise level is down 65 db or better for 25 kc deviation*
- *Overmodulation alarm for aural transmitter — lamp flashes when modulation exceeds predetermined level set by dial*
- *Sensitivity for both Aural and Visual inputs*
  High Impedance Input (VHF) — 1 volt or better
  Low Impedance (UHF) — 500 mw or less
- *Excellent signal-to-noise ratio through channel 83*
- *Separate heater inputs allow direct connection of crystal oven to station standby power*
- *Pilot lamp indicates adequate r-f input level*
- *Terminals are provided for connecting remote frequency-frequency and modulation meters and overmodulation indicators*
- *Counter-type discriminator linear to better than 1% for ±100 kc range, permitting accurate distortion measurements and center-frequency indications reliable even with heavy modulation*
- *New cabinet arranged for maximum heat dissipation and easy installation or removal for servicing*

This instrument — the first UHF Monitor — is another example of the pioneering in engineering, design and workmanship which has characterized G-R monitoring equipment since the beginning of broadcasting.

The G-R Type 1183-T T-V Monitor meets all requirements of the FCC, including those established for offset operation. It not only provides complete monitoring facilities for VHF and UHF stations in accordance with FCC specifications, it assures the quality of everyday transmissions as well. Monitoring of distortion, noise, modulation level, and video and audio carrier frequencies, with the aid of this instrument, results in the rapid detection of substandard operation.

Conveniences for operating personnel are a major feature. The relatively high stability of the VHF Monitor makes frequency checks necessary only *once a month*. Stability, accuracy, ease of maintenance and operation, dependability and long life are optimum. The G-R trademark guarantees trouble free operation with a minimum of maintenance.

Type 1183-T T-V Station Monitor
from $2030.00 to $2985.00
depending on frequency bands

...ge-scale illuminated meter continuously ...icates frequency deviation of aural trans... in terms of highly stable crystal oscil... Zero correction for crystal oscillator ...ily accessible from panel, to compensate ...long-time drift.

Visual transmitter frequency deviation is continuously indicated by this large scale meter, in terms of the same master crystal

Modulation in both percentage and db is indicated continuously on this meter. Panel switch selects either peak, or indicates both peaks simultaneously. Meter ballistics meet FCC requirements.

GENERAL RADIO Company

275 Massachusetts Avenue, Cambridge 39, Massachusetts, U. S. A.

90 West St. NEW YORK 6 · 920 S. Michigan Ave. CHICAGO 5 · 1000 N. Seward St. LOS ANGELES 38

Admittance Meters ☆ Coaxial Elements ☆ Decade Capacitors
Decade Inductors ☆ Decade Resistors ☆ Distortion Meters
Frequency Meters ☆ Frequency Standards ☆ Geiger Counters
Impedance Bridges ☆ Modulation Meters ☆ Oscillators
Variacs ☆ Light Meters ☆ Megohmmeters ☆ Motor Controls
Noise Meters ☆ Null Detectors ☆ Precision Capacitors
Pulse Generators ☆ Signal Generators ☆ Vibration Meters ☆ Stroboscopes ☆ Wave Filters
U-H-F Measuring Equipment ☆ V-T Voltmeters ☆ Wave Analyzers ☆ Polariscopes

PACING
THE ELECTRONIC INDUSTRY...

Not just keeping pace with it!

Yes, the electronic industry is an expanding universe all its own. But TELE-TECH & ELECTRONIC INDUSTRIES, the leading engineering publication in the field, is expanding at a greater rate than the industry itself. That's because the editorial content is unexcelled. No other magazine offers as consistent a flow of high-quality, *exclusive* editorial services — like the Armed Forces Procurement Charts, the national map of Microwave Systems, the FCC Spectrum Chart — and the scoops on transistors.

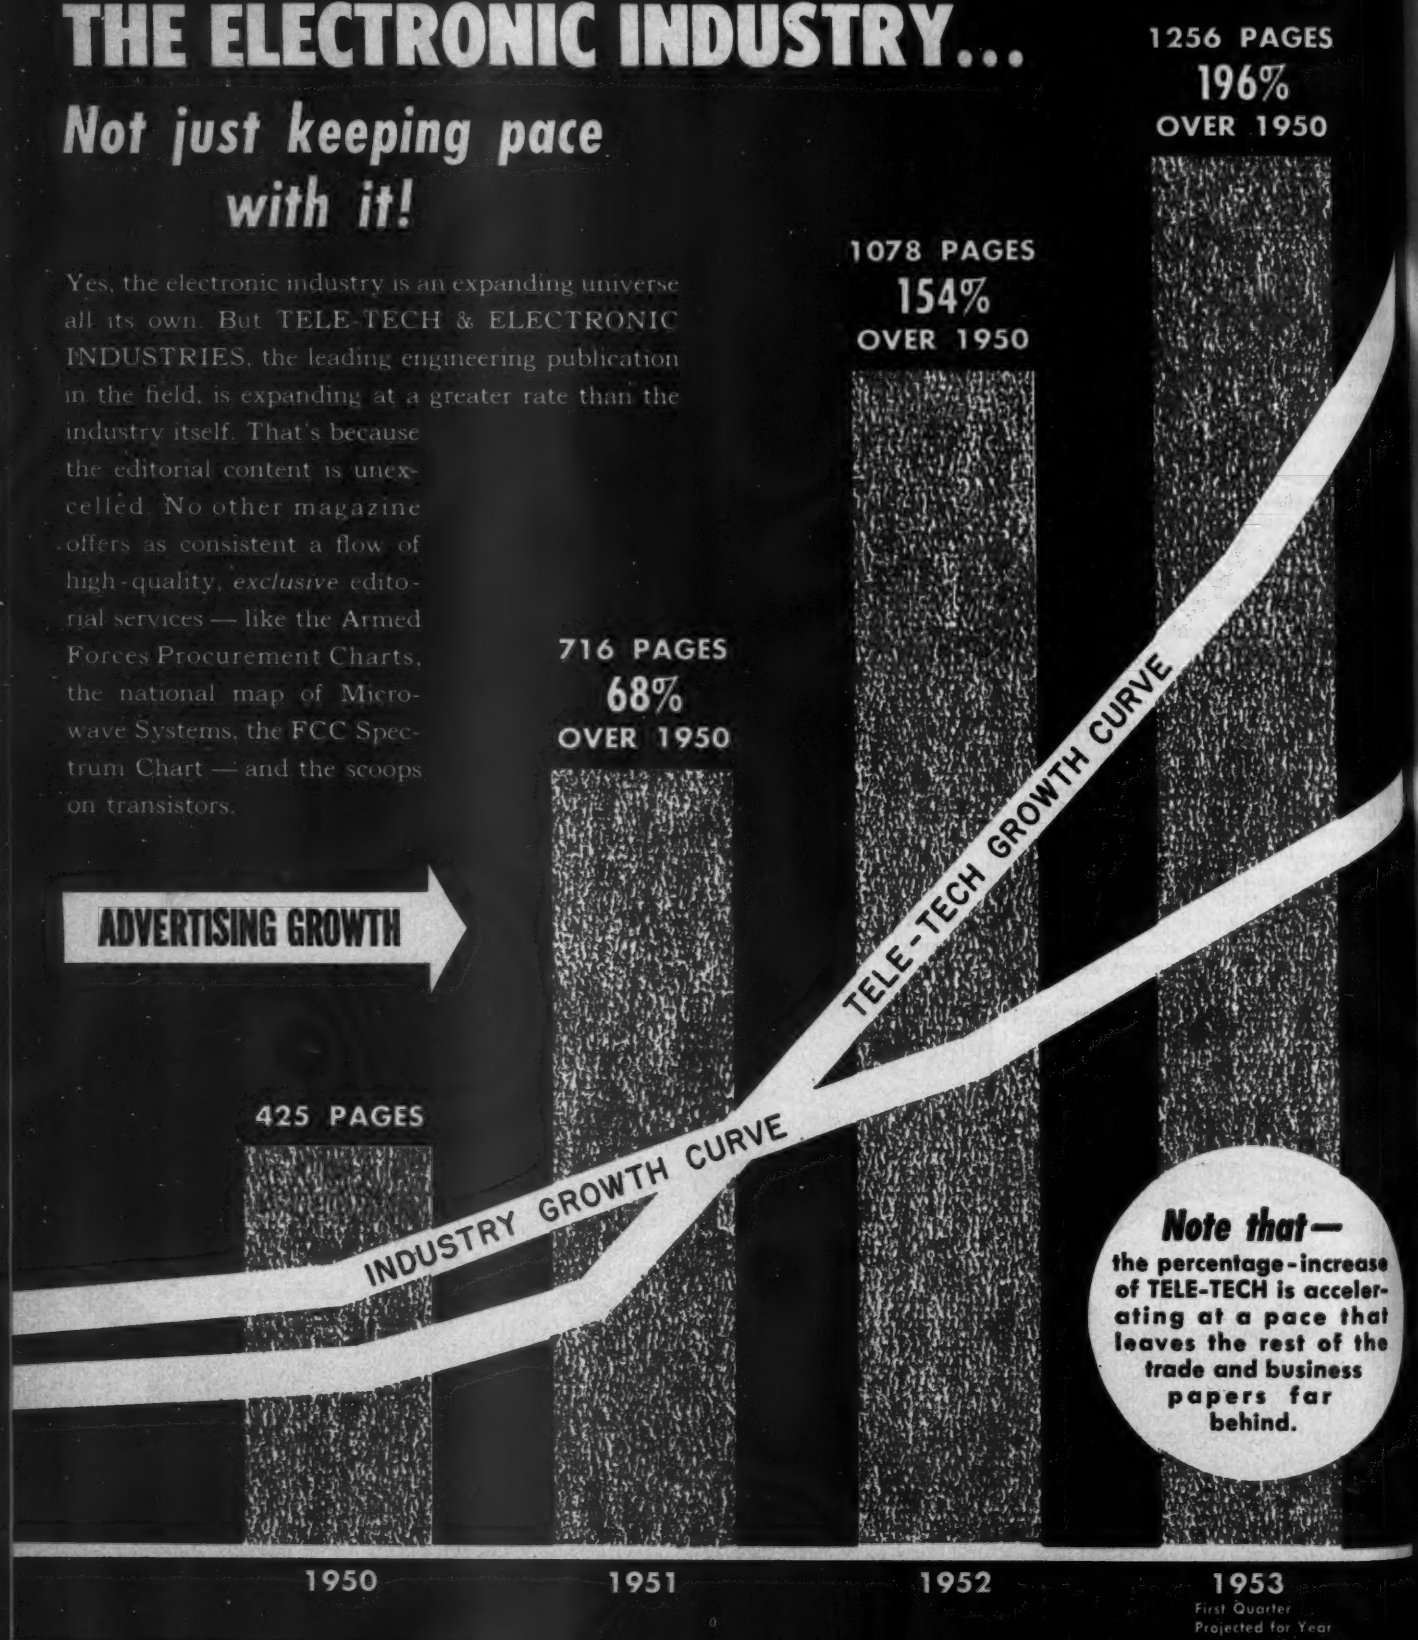

Note that— the percentage-increase of TELE-TECH is accelerating at a pace that leaves the rest of the trade and business papers far behind.

TELE·TECH
& ELECTRONIC INDUSTRIES

The Preferred Engineering Magazine of the Electronic Industry!

Caldwell-Clements, Inc.

480 LEXINGTON AVENUE
NEW YORK 17, N. Y.

back. The high-gain amplifier associated with this bootstrap circuit does have direct-coupled negative feedback which reduces its gain to approximately unity. The resulting circuit is much less subject to drift at its output than the high-gain amplifier associated with the Miller integrator.

E. Display Circuit: During the display period the output voltage of each integrator appears in the form of a vertical spot displacement above a baseline on the face of a cathode-ray tube[6]. These displays are photographed with a Polaroid Land camera if a permanent record is desired.

To obtain this display, a conventional, continuous sawtooth sweep is applied to the horizontal plates of the CRT. At each of five points along the sweep the output voltage of one of the B-channel integrators appears as a vertical spot displacement. This requires a switching circuit to connect the output of each integrator in turn to the vertical deflection system of the CRT at the time when the CRT beam is in the position corresponding

Fig. 10: Autocorrelation functions of music (Mozart E Flat Piano Concerto, end 3rd move.)

to that integrator. A mechanical switching circuit was tried, but an electronic system was found to be more reliable.

This switching circuit contains a five-stage, ring-chain counter, each cycle of which is started in synchronism with the horizontal sweep. Each of the five output pulses opens briefly, in turn, one of five gate circuits. The input of each gate is connected to a B-channel integrator; the outputs are tied to a common wire. The waveform upon this common wire appears as a group of five rectangular pulses of varying heights. An ac amplifier with suitable clamping circuits applies this waveform to the vertical deflection plates of the cathode-ray tube.

A multichannel correlator such as this is especially valuable for investigating nonstationary time series; that is, those time series whose statistical characteristics change with time. With a single channel correlator, which computes only one point on the curve at a time, each point is obtained under different conditions. The five-channel correlator obtains an entire group of five points at one time. By obtaining successive correlation functions of a nonstationary time series, the manner in which the

(*Continued on page* 125)

SHOCK AND VIBRATION
NEWS

HERE'S THE SECRET

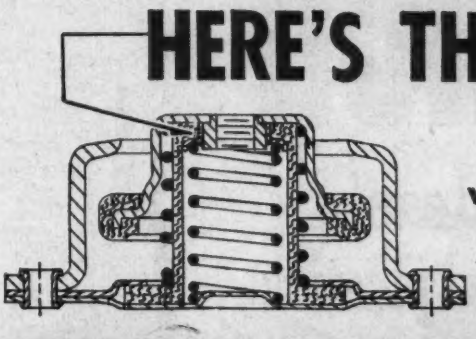

... of a NEW wire-mesh isolator that won't change on the job!

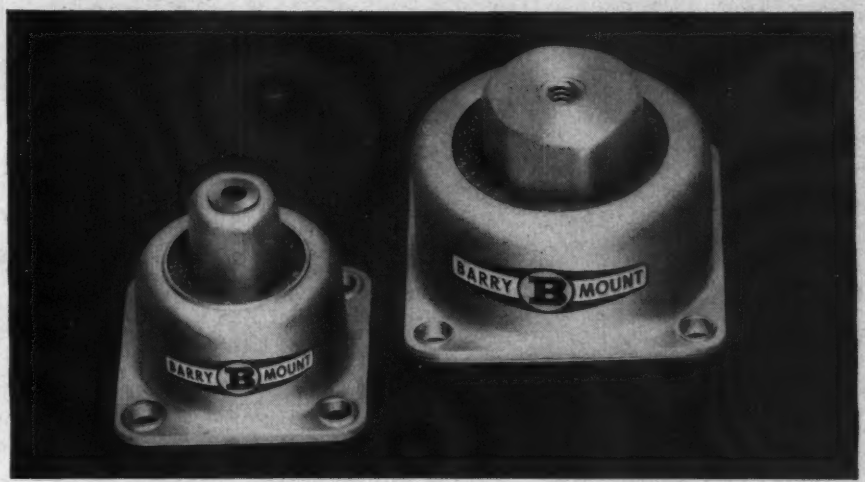

The new Type 7630 and Type 7640 ALL-METL Barrymounts have been specifically designed to eliminate loss of efficiency due to damper packing. Previous wire-mesh unit vibration isolators exhibited a definite loss of damping efficiency after a period in actual service, because the wire-mesh damper tended to pack. These new unit Barrymounts have eliminated this difficulty, because the load-bearing spring returns the damper to its normal position on every cycle.

- Very light weight — helps you reduce the weight of mounted equipment.
- Hex top — simplifies your installation problems.
- High isolation efficiency — meets latest government specifications (JAN-C-172A, etc.) — gives your equipment maximum protection.
- Ruggedized — to meet the shock-test requirements of military specifications.
- Operates over a wide range of temperatures — ideal for guided-missile or jet installations.

Compare these unit isolators with any others — by making your own tests, or on the basis of full details contained in Barry Product Bulletin 531. Your free copy will be mailed on request.

See these new isolators in action, and discuss their applications with us, at the New York I.R.E. Show.

THE BARRY CORP.

761 PLEASANT ST., WATERTOWN 72, MASSACHUSETTS

SALES REPRESENTATIVES IN

Atlanta Baltimore Chicago Cleveland Dallas Dayton Detroit Los Angeles Minneapolis New York Philadelphia Phoenix Rochester St. Louis San Francisco Seattle Toronto Washington

Formica

for new ideas in laminated plastics

PRINTED CIRCUITRY
Formica copper-clad laminates make intricate electrical assemblies smaller, lighter, more reliable.



FF-33 fibreglass fabric grade impregnated with arc-resistant resin for excellent low loss electrical properties, dimensional stability and long, dependable service at high temperatures.



MF-41 fibreglass mat grade impregnated with melamine resin for electrical applications requiring high flame resistance and relatively high arc resistance.

FOR FAST FACTS . . . CLIP COUPON

The Formica Co.
4644 Spring Grove Ave.
Cincinnati 32, Ohio

Send us information immediately on

☐ Printed circuits
☐ FF-33 ☐ MF-41

Name _____

Address _____

– AT A NEW LOW PRICE

the ELECTRONIC ENGINEERING HANDBOOK

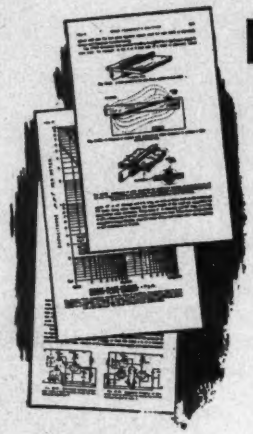

456 pages —over 260 illustrations

. . . authoritative
. . . standard
. . . complete
. . . clear
. . . concise
. . . practical

Reissued at *Your* Request

Yes, because of the demand of engineers everywhere, THE ELECTRONIC ENGINEERING HANDBOOK—the standard reference in the field—is once again available . . . and at a truly economical price!

THE ELECTRONIC ENGINEERING HANDBOOK is regarded by many engineers as the most complete, authoritative, and useful book on electronic tubes and their applications ever published. It contains 560 charts, diagrams, and tables . . . more than 260 illustrations . . . and 456 pages jam-packed with facts-and-figures for day-in and day-out use.

What's more, THE ELECTRONIC ENGINEERING HANDBOOK is practical . . . placing special emphasis on industrial applications. The text is clear, concise . . . written in a language anyone can understand—and there's no reliance on involved mathematics. This handbook is a must for engineers, plant managers, production heads, executives—for everyone in the field from the electronic specialist to the student.

Read This List of Contents!

Vacuum Tube Fundamentals
- Electronic Principles
- Principles of Diodes
- Principles of Multi-Element Tubes
- Principles of Photo-electric Tubes
- Cathode Ray Tubes
- Special Purpose Tubes
- Materials in Tube Construction
- Vacuum Tubes as Circuit Elements

Electronic Circuit Fundamentals
- Principles of Rectification
- Principles of Amplification
- Low Frequency Amplifiers
- High Frequency Amplifiers
- Principles of Oscillators
- Principles of Modulation
- Principles of Detection
- Cathode Ray Oscillographs
- Relaxation Oscillators
- Photo-electric Circuits
- Electron Tube Circuit Application

Electronic Applications
- High Frequency Heating
- Industrial Sound Systems

Vacuum Tube Data
- Electronic Tube Data and Tables

For the FACTS You Want— When You Want Them No Risk 10 Day Approval

CALDWELL-CLEMENTS, INC.
480 Lexington Avenue • New York 17, New York

Send me The Electronic Engineering Handbook at the new low price of $3.00. If not satisfied I will return the book within ten days, otherwise I will remit the price.

Name .....
Address .....
City .....Zone.....State.....
Company Name .....
(This offer good only within the boundaries of the United States)

correlation function is changing is indicated.

Figs. 8-10 show how the correlation functions of certain time series do vary. Each figure shows several correlation functions obtained from the same time series at different times. The first group of five points along the curve is shown in each instance. The data was obtained for the following conditions:

Value of τ increases from left to right

$\Delta\tau$=400 μsec

Number of sample pairs=4,000

Time interval covered by each curve equals 8 seconds

Time between successive curves equals about 20 seconds

In each case the input was passed through a clipper to make certain that large peaks did not cause large errors by overloading the multipliers. The clipping was slight, and it was verified by listening to the output of the clipper through headphones that the actual sound was not more than slightly affected.

The curves obtained for gas tube noise (Fig. 8) show very little difference among themselves. This is to be expected since there is no apparent reason for the output of the noise generator to be nonstationary over the short interval of time during which the curves were obtained. The slight fluctuations that do occur are probably random fluctuations (sampling noise) caused by the limited number of sample pairs taken.

Since these curves have a maximum τ value of only 1.6 milliseconds, the curves obtained for speech (Fig. 9) cover only the high frequency components. Successive curves differ noticeably, yet all have the same general shape for the same voice.

Fig. 10 shows curves that have been obtained for music. Here the rapidly varying character of the time series is clearly evident.

Appreciation is expressed to Professor Y. W. Lee for suggesting the construction of the five-channel correlator and to H. Levick, F. L. Petree and D. E. Ullery for their contributions to this work.

This work has been supported in part by the Signal Corps, the Air Materiel Command, and the Office of Naval Research.

REFERENCES

1. H. E. Singleton, "A Digital Electronic Correlator," Technical Report No. 152, Research Laboratory of Electronics, MIT, Feb. 21, 1950.
2. J. F. Reintjes, "An Analogue Electronic Correlator," Proc. N.E.C., vol. 7, 1952.
3. M. J. Levin, "A Five-Channel Electronic Analogue Correlator," thesis for S.M. degree, MIT, 1952.
4. D. E. Ullery, "Sampling Pulse Generator for Multichannel Correlator," thesis for S.M. degree, MIT, 1951.
5. H. Levick, "Sampling Circuit for an Electronic Analogue Correlator," thesis for S.M. degree, MIT, 1951.
6. F. L. Petree, "Display Circuit for a Multichannel Correlator," thesis for S.M. degree, MIT, 1951.

New RCA-6181 power tetrode used in RCA 1-Kw UHF television transmitter type TTU-1B.

New UHF Stations

with the RCA-6181

UHF TELEVISION is now a reality! And the RCA-6181 power tetrode is playing a vital role in new station operations.

Many features have been incorporated in this new tube which provide important operating advantages. The use of forced-air cooling permits substantial operating economies: ceramic bushings are used between terminals to reduce power loss. The coaxial-electrode structure of the 6181 is designed especially for use with high-power circuits of the coaxial-cylinder cavity type; its indirectly heated, low-temperature, coated cathode assures long serviceability.

Specify RCA when you need tubes for replacement.

KEEP IN TOUCH WITH YOUR LOCAL RCA TUBE DISTRIBUTOR FOR THE LATEST TUBE DEVELOPMENTS.

RCA® RADIO CORPORATION of AMERICA
ELECTRON TUBES HARRISON, N.J.

FREQUENCY FEEDBACK

(*Continued from page 93*)

Because the biasing permeativity $(\mu,\varepsilon)_B$ corresponds to the center points of the various chords, the relationship between $(\mu,\varepsilon)_B$ and the amplitudes of the polarizing field becomes evident as a result of flux rectification.

Although this philosophy may not be fully conclusive, the illustrated phenomena reveal the relationship between dynamic permeativity on one hand and bias as well as superimposed ac polarization on the other hand. At any rate, the dynamic permeativity manifests itself in equivalent changes of the dynamic inductance of an iron-cored coil and the dynamic capacitance of a ferroelectric condenser, respectively. In fact, variations as large as 10 : 1 have been measured for inductors with Ferramic cores and as large as 4 : 1 for barium strontium titanate capacitors, whereby the lower ratio of the capacitor must be attributed to breakdown voltage, dielectric losses, and temperature effects.

If we now turn back to frequency feedback, we may easily see that the relationship between dynamic reactance and r-f amplitude takes the place of the feedback line in Fig. 2. Hence, the resonance curves of a nonharmonic resonant system are unsymmetrically deformed in the same manner as when caused by an external feedback channel. This has been corroborated by numerous experiments which evidenced the nonharmonic resonance curves depicted in Fig. 7 and produced by a nonlinear coil (a) as well as a barium strontium titanate capacitor (b), except that the limited dielectric strength of the latter prevents the instability.

Instead of oscillographing the nonharmonic resonance characteristics with the aid of a sweep generator, it is also possible to sweep the test circuit by means of its nonlinear reactance. As shown in the diagram of Fig. 8 a sweep voltage is impressed upon the ferroelectric capacitor and, at the same time, provides the X-deflection of the oscilloscope. The two oscillograms shown in Fig. 9 illustrate the resonance shifting with increasing r-f excitation from oscillogram (a) to oscillogram (b), in other words: The tank circuit is retuned by a higher biasing voltage.

Nonharmonic Resonance

A resonant system also becomes nonharmonic if it contains a nonlinear resistor such as a crystal diode, a Thyrite, or a Polaristor,[1,4] provided it operates in combination with a fixed reactance. For this purpose) the nonlinear resistor forms part of a network, the simplest circuit containing both in series. The resulting RX-modulators have been utilized for FM[2] but, at the same time, make a resonant system nonharmonic.

Fig. 10(a) shows the nonlinear resistor R_S in series with the constant reactance X_s paralleling the shaded tank circuit. If we convert the series network into the equivalent parallel network shown in Fig. 10(b) wherein the equivalent reactance X_p and the equivalent damping resistor R_p shunt the tank circuit, the nonlinearity of R_S is transformed into X_p so

Fig. 7: Nonharmonic resonance due to saturable reactor (a) and nonlinear capacitor (b)

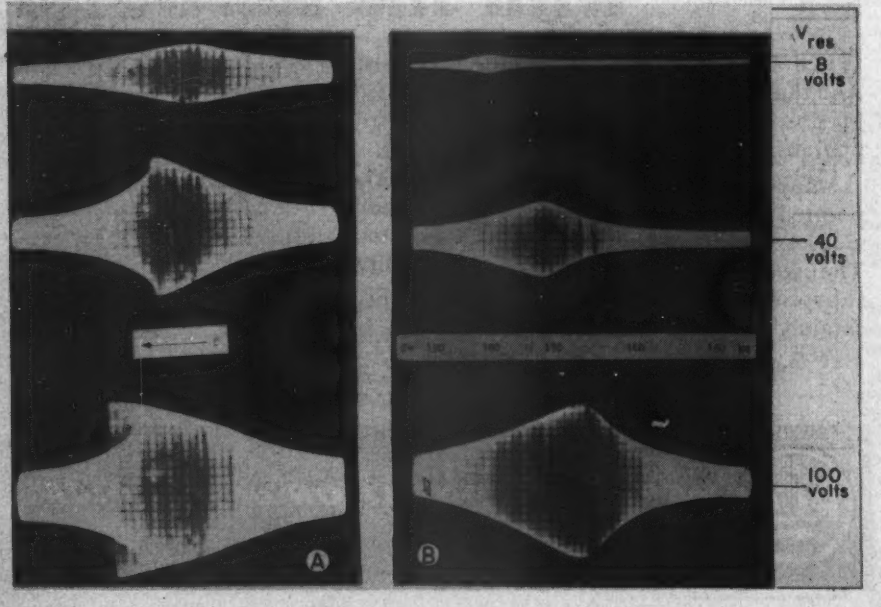

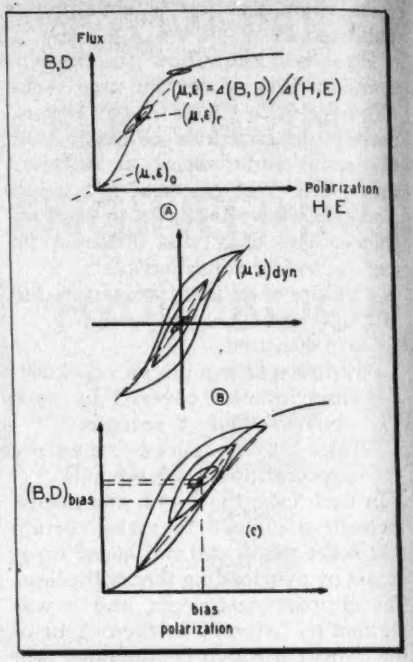

Fig. 6: Various hysteresis loops caused by using different ac and bias polarizations

that the RX-modulator is equivalent to a nonlinear reactance.

Whereas FM is produced by controlling the series resistor by means of an external modulating voltage, nonharmonic resonance occurs under the influence of r-f in that the dynamic resistance is altered. Let the nonlinear resistor be characterized by the symmetrical I-V characteristic $I = \pm KV_r^2$ depicted in Fig. 11(a). If we recall the dynamic permeativity, the dynamic resistance may be set equal to the inverse slope of the dashed chord

$$R_d = 1/K\hat{V}_r \qquad (5)$$

where $\hat{V}_r$ denotes the peak value of the r-f voltage across R_S. By means of this analogy, it can easily be seen that the dynamic resistance decreases with increasing r-f amplitudes as illustrated in Fig. 11(b).

RX-Modulator

The frequency feedback caused by an RX-modulator may be explained by a first order analysis. Let the series reactance X_s be a capacitance $1/\omega C_s$. The voltage drop V_r then follows from the r-f voltage V~ induced in the tank circuit as

$$V_r = V\sim/\sqrt{1+PV_r^2} \qquad (6a)$$

where $P = (K/\omega C_s^2)$. The equation has the solution

$$V_r^2 = (\sqrt{1+4PV^2\sim}-1)/2P \qquad (6b)$$

Now, the series combination must be converted into the equivalent

(*Continued on page 128*)

Designs Unlimited

WHATEVER factors determine the type, height and location of your TV Antenna Tower, you can depend on Blaw-Knox to give you *more for your money*. Does the job call for a self-supporting structure atop a mid-town building or a sky-scraping guyed tower out in the open? Do you prefer a square one is backed by more than four decades of experience in this field. If you are anticipating a TV license, write or phone today for capable engineering assistance with your plans.

Distributed by GraybaR

BLAW-KNOX

BLAW-KNOX EQUIPMENT DIVISION
BLAW-KNOX COMPANY
2038 Farmers Bank Bldg.
Pittsburgh 22, Pa.

FREQUENCY FEEDBACK

(*Continued from page 126*)

parallel network. Setting both admittances equal

$$\frac{1}{R_d+1/j\,\omega\,C_s} = \frac{1}{R_p} + j\,\omega\,C_p \qquad (7)$$

gives

$$C_p = \frac{C_s}{1+(\omega C_s R_d)^2} \qquad (7a)$$

and

$$R_p = R_d\left[1 - \frac{1}{(\omega C_s R_d)^2}\right]. \qquad (7b)$$

If we introduce Eqs. (5) and (6b), both formulas assume the forms

$$C_p = C_s\frac{\sqrt{1+4PV^2\sim}-1}{\sqrt{1+4PV^2\sim}+1} \qquad (8a)$$

and

$$R_p = \frac{\sqrt{1+4PV^2\sim}+1}{\sqrt{2}\omega C_s\sqrt{\sqrt{1+4PV^2\sim}-1}}. \qquad (8b)$$

Fig. 8: Schematic of an arrangement for making oscillograph curves of nonharmonic resonance

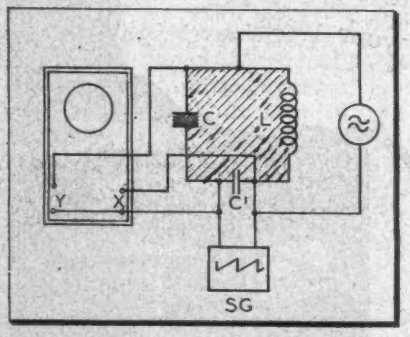

Fig. 9: Curves made by circuit shown in Fig. 8

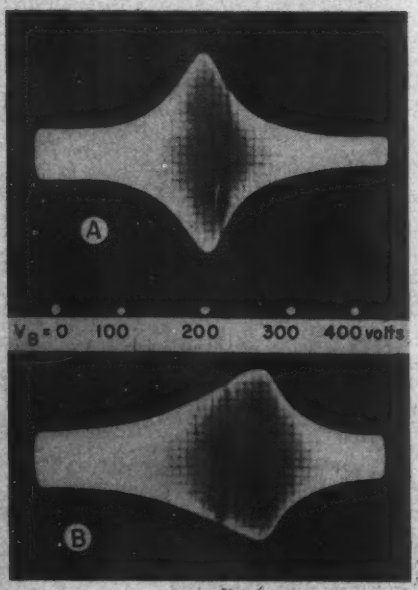

Finally, we evaluate the detuning of the nonharmonic tank circuit by means of

$$x = \frac{\omega}{\omega_o} - \frac{\omega_o}{\omega} = -\frac{C_p}{C_o}\frac{1}{\sqrt{1+C_p/C_o}} \qquad (9)$$

$$= \frac{-C_s}{C_o}\sqrt{\frac{1+2PV^2\sim-\sqrt{1+4PV^2\sim}}{1+2PV^2\sim\left(1+\frac{C_s}{C_o}\right)+\sqrt{1+4PV^2\sim}}}$$

The accuracy of Eq. (9) has been checked by the investigation of a test circuit shunted by an RX-modulator with $C_o = 2{,}400$ μμf; $C_s = 1{,}000$ μμf; $\omega_o = 1.27 \cdot 10^6$ whereas two germanium diodes in back-to-back connection are characterized by $K = 10^{-2}$. The solid characteristic in Fig. 12 shows the measured detuning versus increasing r-f excitation. The dashed curve is evaluated and agrees with the experiment as well as can be expected. The sensitive diodes produce a strong frequency feedback: An induced voltage as low as 0.4 volts approaches the short-circuit detuning $x_s = -0.35$ for $R_d \to 0$.

Eq. (8b) shows that the equivalent parallel resistor R_p becomes infinitely high for $R_d = 0$ as well as ∞ because both extremes cause no additional damping. Between these extremes, R_p passes a minimum. This is corroborated by the dotted characteristic in Fig. 12 disclosing the quality factor $\sqrt{Q}$. At low r-f excitation, Q decreases rapidly from its initial value $Q_o = 86$ and, after passing a minimum of only 5, increases again and asymptotically approaches Q_o. Such a heavy damping can be avoided by smaller capacitors C_s or less sensitive resistors at the expense of detuning sensitivity.

Impedance of Nonharmonic Systems

Up to now, the result of frequency feedback has been discussed at varying frequencies with the driving power as parameter. The philosophy of frequency feedback, however, is not complete as long as we do not change the parameters, in other words: The nonharmonic system is excited at a constant generator frequency and fed by the r-f current I~ with the constant frequency ω_{gen}. A preresistor r in Fig. 13(a) stabilizes the feeding current and may represent the internal impedance of the generator.

Let the dynamic capacity be related with the induced voltage V~ by the formula

$$C_d = C_b(1 - A\ V\sim) \qquad (10)$$

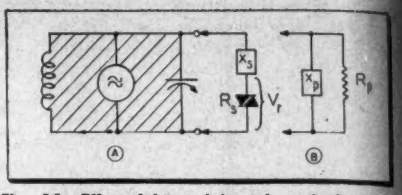

Fig. 10: RX-modulator (a) and equivalent (b)

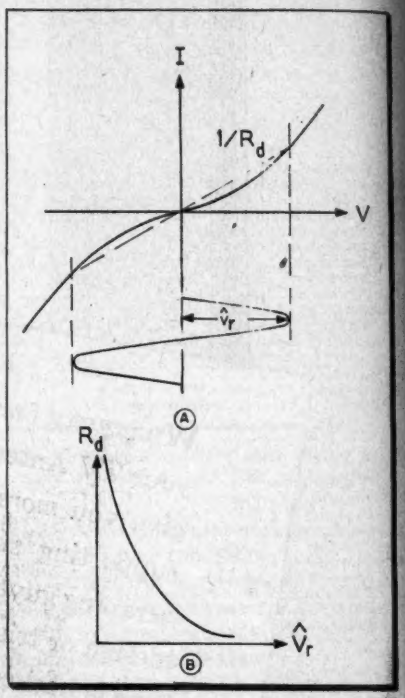

Fig. 11: I-V characteristic of nonlinear resistor (a) and resistance characteristic (b)

where C_b is the bias capacity and A the dynamic sensitivity taking care of the change in incremental permittivity as well as of the ferroelectric rectification at given conditions of operation. The admittance of the tank circuit then becomes (11a)

$$G = \left|\omega_{gen}\,C_b\,(1-AV\sim) - \frac{1}{\omega_{gen}\,L}\right|.$$

After introducing the resonant frequency $\omega_B = 1/\sqrt{IC_B}$ and after several rearrangements it assumes the form (11b)

$$G = \sqrt{\frac{C_b}{L}}\left|\frac{\omega_{gen}}{\omega_b}(1-AV\sim) - \frac{\omega_b}{\omega_{gen}}\right|.$$

The formula reveals as a function of the induced r-f voltage at constant frequencies. Consequently, the driving current I~ and the induced voltage V~ are related by (12)

$$I\sim = V\sim G$$

$$= V\sim\sqrt{\frac{C_b}{L}}\left|\frac{\omega_{gen}}{\omega_b}(1-AV\sim) - \frac{\omega_b}{\omega_{gen}}\right|$$

with the frequency ratio as parameter.

The simplest condition of opera-

(*Continued on page 132*)

Do you want more information on PRODUCTS advertised in TELE-TECH

Use these convenient postage-free inquiry cards to get information quickly about products listed below—all advertised in this issue

TELE-TECH — ELECTRONIC INDUSTRIES – RADIO-TELEVISION

801 Aerovox Corp. Capacitors
802 Aircraft Transformer Corp. Transformers, cores, relays
803 Alden Products Co. Plug-in chassis, indicators, jacks
804 Altec Lansing Corp. Output transformers
805 American Electrical Heater Co. Electric soldering irons & stands
806 American Microphone Co. Cardioid & directional microphones
807 American Encaustic Tiling Co. Wavemeter test set
808 American Phenolic Corp. Methods manual, connectors
809 American Wood Working Co. Wood parts, spools, knobs, dowels
810 Amperite Co., Inc. Delay relays, ballast-regulators
811 Anchor Industrial Co. Plastic rings, sleeves, insulating assemblies
812 Andrew Corp. Transmission line, waveguide
813 Antara Chemicals, Div. General Dyestuff Corp. Iron core powders
814 Arco Electronics Inc. Molded mica capacitors
815 Arnold Engineering Co. Magnetic cores
816 Artos Engineering Co. Automatic wire stripping machines
817 Astron Corp. Capacitors
818 Audio Devices, Inc. Recording discs and tape
819 Avery Adhesive Label Corp. Self-adhesive labels
820 Barry Corp. Shock & vibration mounts
821 Bell Telephone Labs. Telephone cable maintenance
822 Berkeley Sci. Div. Beckman Insts. Inc. Printed readout for counters
823 Berkeley Sci. Div. Beckman Insts. Inc. Digital frequency meters
824 Bendix Aviation Corp., Eclipse Div. Precision synchros
825 Birtcher Corp. Tube & component clamps
826 Blaw-Knox Co. TV antenna towers
827 Blonder-Tongue Labs. Engineering personnel
828 Burke & James Inc. Television camera lenses
829 Burnell & Co. Toroids & filters
830 Bussmann Mfg. Co. Fuses, clips, holders
831 Cannon Electric Co. Connectors, receptacles, plugs, elbows
832 Centralab Div. Globe-Union Inc. Resistor controls, switches
833 Century Lighting, Inc. TV studio lighting systems
834 Cinch Mfg. Co. Sockets, stampings, connectors
835 Cinema Engineering Co. Audio equalizers, frequency filters
836 Cleveland Container Co. Threaded tubing, coil forms
837 Continental-Diamond Fibre Co. Vulcanized fibre
838 Cornell-Dubilier Electric Corp. Interference filters, capacitors
839 Crosby Labs., Inc. Single sideband receivers
840 Cunningham, Son & Co., Inc., James Crossbar circuit switches
841 Daven Co. Special & standard switches
842 Dialight Corp. Subminiature pilot lights
843 DuMont Labs., Inc., Allen B. Cathode-ray tubes
844 DuMont Labs., Inc. Allen B. CRT heater assemblies
845 DX Radio Products Co. Yokes, coils, transformers
846 Eisler Engineering Co., Inc. Glass working equipment, welders
847 Eitel-McCullough, Inc. Power tubes, vacuum capacitors
848 Electrical Tower Service, Inc. Tower erection service
849 Electro Motive Mfg. Co., Inc. Mica capacitors
850 Electro Products Labs. DC power supplies
851 Ford Instrument Co. Instruments, controls, stabilizers
852 Formica Co. Insulators
853 Freed Transformer Co., Inc. Transformers & instruments
854 Gates Radio Co. Broadcast transmitting equipment
855 General Electric Co. Indicator lamps
856 General Electric Co. UHF transmitting & receiving tubes
857 General Electric Co. Plug-in broadcast preamplifiers
858 General Electric Co. Transmitting & rectifier tubes
859 General Electric Co. Junction germanium rectifiers
860 General Precision Lab. TV cameras, film chains
861 General Radio Co. TV monitors, deviation meters
862 Gertsch Products Inc. Direct-reading VHF frequency meters
863 Grant Pulley & Hardware Co. Electronic equipment slides
864 Gray Research & Development Co., Inc. TV projection units
865 Grayhill Pushbutton switches
866 Guardian Electric Mfg. Co., Solenoid contactors, relays
867 Gudebrod Bros. Silk Co., Inc. Nylon lacing tape
868 Hammarlund Mfg. Co., Inc. Variable trimmer capacitors
869 Hart Mfg. Co. Hermetically sealed miniature relays
870 Heath Co. Test equipment, signal generators
871 Heminway & Bartlett Mfg. Co. Nylon lacing cord & tape
872 Heppner Mfg. Co. Electro-dynamic speakers
873 Hermetic Seal Products Co. Hermetic transistor seals
874 Hi-Q Div. Aerovox Corp. Ceramic capacitors
875 Houston Fearless Corp. TV camera cranes, mounts, dollies
876 Hughes Research & Development Labs. Engineering personnel
877 Hughey & Phillips Tower lighting alarms
878 Hytron Radio & Electronics Co. Transistors
879 International Rectifier Corp. Germanium diodes
880 International Resistance Co. Resistors
881 Jennings Radio Mfg. Co. Vacuum capacitors
882 Johnson Co., E. F. Panel indicators, pilot lights
883 Jones, Howard B., Div. Cinch Mfg. Corp. Plugs & sockets
884 Kahle Engineering Co. Tube production machinery
885 Kay Electric Co. Electronic instruments
886 Kalbfell Labs., Inc. Attenuating networks
887 Kenyon Transformer Co., Inc. Oil-filled transformers
888 Kester Solder Co. Flux-core solders

Here is a service maintained as a convenience to the industry's largest top-level engineering audience—making it easy to get the information you want. And only one simple form to fill out.

TO FACILITATE YOUR OWN PLANNING, MAIL THESE INQUIRY CARDS TODAY!

Listings continued on next page ▶▶▶

INQUIRY CARD — Not good after May 1, 1953

Write in boxes the code numbers of products for which you want information. See list above and on next page.

Information also wanted on .....

Your company .....

Address .....

.....

Your name .....

Your title .....

TELE-TECH—MARCH 1953

CALDWELL-CLEMENTS, INC., 480 Lexington Avenue, New York 17

INQUIRY CARD — Not good after May 1, 1953

Write in boxes the code numbers of products for which you want information. See list above and on next page.

Information also wanted on .....

Your company .....

Address .....

.....

Your name .....

Your title .....

TELE-TECH—MARCH 1953

CALDWELL-CLEMENTS, INC., 480 Lexington Avenue, New York 17

PRODUCT INFORMATION? *Is that what you need?*

Use these cards to get information quickly . . . through TELE-TECH

TELE-TECH is the predominant technical journal of a 5½ billion dollar market in the telecommunications and electronic defense industries. In the advertising pages as well as in editorial features, you will often get the FIRST NEWS of important advances in products coming soon or all ready for the market.

Listings continued from preceding page

889 Ketay Mfg. Corp. Synchros, servos, magnetic amplifiers
890 Keystone Products Co. Magnetic amplifiers
891 Kinetix Instrument Co., Inc. Synchros, servos, transformers
892 Klein & Sons, Mathias Pliers for wiring & cutting
893 Knights Co., James Crystals, frequency-modulation monitors
894 Kulka Elec. Mfg. Co. Wiring devices
895 Legri S Co. Resistors, controls, potentiometers
896 Littelfuse, Inc. Miniature fuse extractor post
897 Machlett Labs. Industrial & broadcast tubes
898 Magnecord, Inc. Tape recorders
899 Magne-Pulse Corp. Magnetic transient recorders
900 Mallory & Co., Inc., P. R. UHF TV tuners, switches
901 Melpar. Inc. Engineering Personnel
902 Methode Mfg. Corp. Miniature tube sockets, shields
903 Midland Mfg. Co., Inc. Hermetically sealed crystals
904 Mod. Engrg. & Mfg. Inc., Tru-Ohm Prod. Div. Pow. rheostats, resistors
905 National Vulcanized Fibre Co. Laminated plastics
906 N.R.K. Mfg. & Engineering Co. Microwave & radar equipment
907 Par-Metal Products Corp. Racks, cabinets, chassis
908 Permoflux Corp. Magnetic cores
909 Polarad Electronics Corp. Microwave generators, TV cues & amplifiers
910 Potter Instrument Co., Inc. Tape handlers, recorders, counters
911 Precision Paper Tube Co. Coil form bobbins
912 Pyramid Electric Co. Miniature paper capacitors
913 Radio Corp. of America UHF transmitting tubes
914 Radio Corp. of America TV picture tubes
915 Radio Corp. of America Engineering personnel
916 Radio Corp. of America Receiving tubes
917 Radio Corp. of America Television cameras
918 Radio Materials Corp. Ceramic capacitors
919 Radio Receptor Co., Inc. Germanium diodes
920 Radio Shack Corp. Catalog of electronic equipment
921 Raypar, Inc. TV output transformers
922 Raytheon Mfg. Co. Transistors, subminiature tubes
923 Relay Sales Relays & relay catalog
924 Resisco Corp., Resistors, tubes, potentiometers
925 Resistance Products Co. Wire-wound resistors
926 Riverbank Labs. Bimetal tuning forks
927 Sangamo Electric Co. Molded mica capacitors
928 Shallcross Mfg. Co. Wirewound resistors
929 Shure Brothers, Inc. Microphones, acoustic devices
930 Speer Resistor Div. Speer Carbon Co. Carbon resistors
931 Sprague Electric Co. Printed circuits, capacitors
932 Standard Transformer Corp. Transistor & miniature transformers
933 Stupakoff Ceramic & Mfg. Co. Printed circuits
934 Sylvania Electric Products Inc. Broadband klystrons
935 Sylvania Electric Products Inc. Vacuum tube sockets
936 Synthane Corp. Laminated plastics, sheets, tubes
937 Transvision, Inc. Coils, transformers, resistors
938 Tung-Sol Electric Inc. Electron tubes, picture tubes
939 Turner Co. Microphones & stands
940 United Catalog Publishers, Inc. Electronic-TV equipment catalog
941 U. S. Engineering Co. Manual of electronic hardware
942 Victoreen Instrument Co. Special purpose tubes
943 Waterman Products Co., Inc. Miniaturized oscilloscopes
944 Weckesser Co. Plastic cable clips
945 Welch Scientific Co., W. M. Atomic charts & tables
946 Westinghouse Electric Corp. Microwave radio systems
947 Westinghouse Electric Corp. Magnetic cores
948 Wheeler Insulated Wire Co., Inc. Sound powered phones
949 Wilkor Div. Aerovox Corp. Deposited-carbon resistors
950 Wollensak Optical Co. TV camera lenses

Use these postage-free cards to get further information on any products advertised in TELE-TECH

Caldwell-Clements, Inc.

480 LEXINGTON AVENUE NEW YORK 17, N. Y.

CHICAGO—201 N. Wells Street, Chicago 6, Illinois

CALIFORNIA—Chris Dunkle & Associates, 2506 W. 8th St., Los Angeles 5

Not good after May 1, 1953

FIRST CLASS
PERMIT No. 22273
(Sec. 34.9, P.L.&R.)
NEW YORK, N.Y.

BUSINESS REPLY CARD
NO POSTAGE STAMP NECESSARY IF MAILED IN UNITED STATES

3¢—POSTAGE WILL BE PAID BY

TELE-TECH
480 LEXINGTON AVENUE
NEW YORK 17, N. Y.

Caldwell-Clements, Inc.

Not good after May 1, 1953

FIRST CLASS
PERMIT No. 22273
(Sec. 34.9, P.L.&R.)
NEW YORK, N.Y.

BUSINESS REPLY CARD
NO POSTAGE STAMP NECESSARY IF MAILED IN UNITED STATES

3¢—POSTAGE WILL BE PAID BY

TELE-TECH
480 LEXINGTON AVENUE
NEW YORK 17, N. Y.

Caldwell-Clements, Inc.

follow the leaders to EIMAC TUBES!

TRIODES

2C39A	100TL
3W5000A3	152TH
3W5000F3	152TL
3W10000A3	250TH
3X2500A3	250TL
3X2500F3	304TH
3X3000A1	304TL
3X3000F1	450TH
6C21	450TL
25T	592/3-200A3
35T	750TL
35TG	1000T
75TH	1500T
75TL	2000T
100TH	

TETRODES

4-65A	4W20000A
4-125A	4X150A
4-250A	4X150D
4-400A	4X150G
4-1000A	4X500A
4PR60A	4X500F

PENTODE

4E27A/5-125B

RECTIFIERS

2-01C	RX21A
2-25A	250R
2-50A	253
2-150D	866A
2-240A	872A
2-2000A	8020 (100R)
KY21A	

AIR SYSTEM SOCKETS

4-400A/4000
4-400A/4006*
4-1000A/4000
4-1000A/4006*
4X150A/4000
4X150A/4006*

*Replacement Chimneys





VACUUM SWITCH

VS-2
12V Coil
24V Coil



ACCESSORIES

HR Heat dissipating connectors
Preformed Contact Finger Stock

VACUUM PUMP

HV-1
Oil
DIFFUSION
PUMP

Type A
Pump Oil
HV-1
Pump Parts

VARIABLE VACUUM CAPACITORS

VVC60-20
VVC2-60-20
VVC4-60-20

ION GAUGE

100 IG ion gauge

VACUUM CAPACITORS

VC6-20	VC25-20
VC6-32	VC25-32
VC12-20	VC50-20
VC12-32	VC50-32



4-125A

The radial-beam power tetrode that made transmitting screen-grid tubes popular. This tube will take a plate input of 500 watts for CW or 380 watts for fone. Driving power is less than two watts. A pair of these tetrodes make an ideal high power fone or CW final for the amateur.



4X150A

This small external anode radial-beam power tetrode operates efficiently at all frequencies into the UHF range with a driving power of only a few watts. Its small size and ruggedness make it ideal for compact equipment such as mobile.



450T

Often referred to as the workhorse of modern communication systems, this dependable triode has a plate dissipation rating of 450 watts. It is widely used as an amplifier, oscillator or modulator.

3K20000L (A-F-K)

These Klystrons, the latest development in UHF television transmitting, have a power output of 5000 watts. The three versions of the Klystron will cover the entire UHF range —470-890 mc. These water and air cooled Klystrons have a power gain of 20 db.



VVC60-20

This is but one type in the Eimac line of variable and fixed vacuum capacitors for plate tank circuits. It is variable over a range of 10 mmfd to 60 mmfd. Maximum rf voltage is 20 kv. at 40 amperes.



2C39A

This small, rugged triode is designed for use as a power amplifier, oscillator or frequency multiplier to frequencies above 2500 mc. It is particularly suitable for compact fixed or mobile equipment.

Eimac TUBES

● Complete technical data available on request.

EITEL-McCULLOUGH, INC.
SAN BRUNO, CALIFORNIA

EXPORT AGENTS: FRAZAR & HANSEN • 301 CLAY STREET • SAN FRANCISCO 11, CALIFORNIA

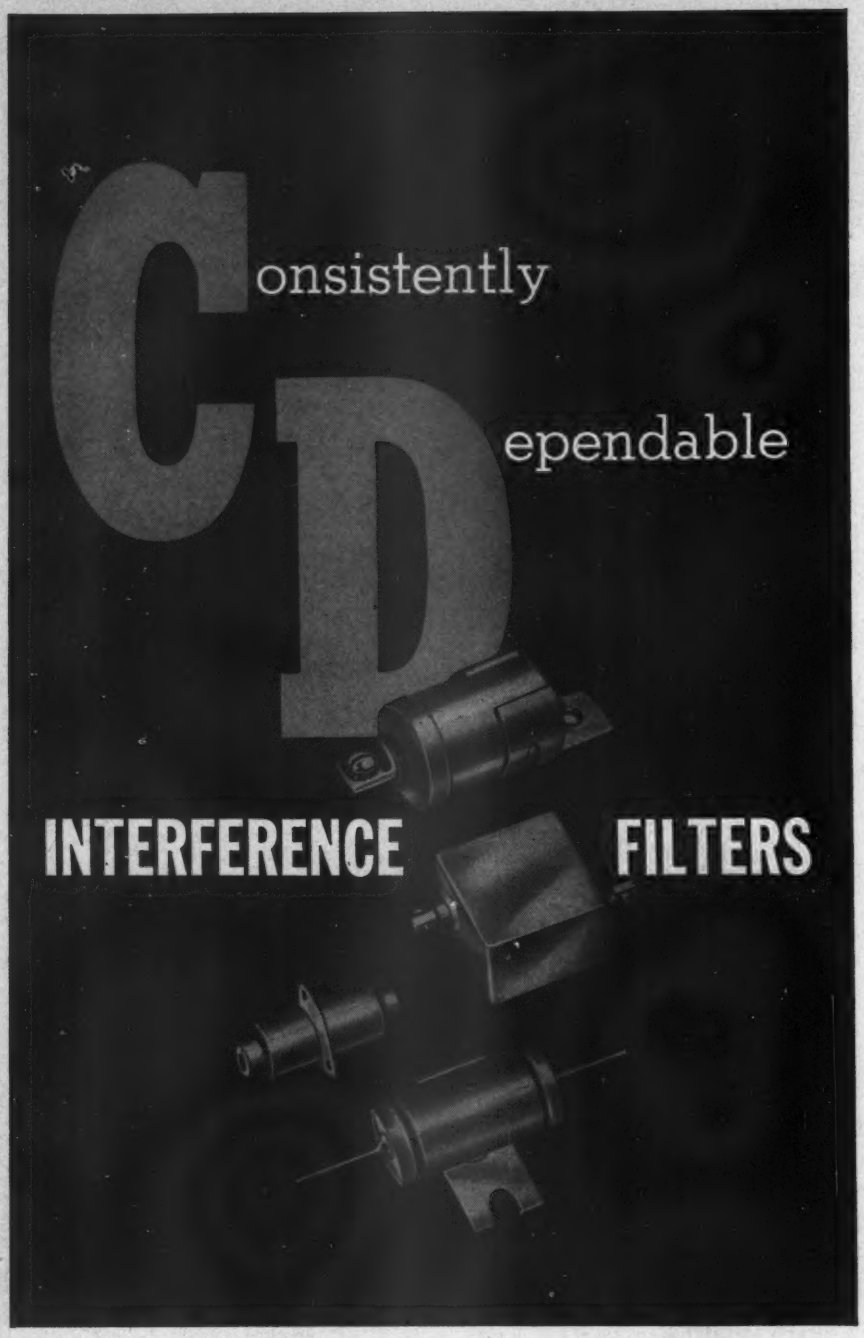

There's a C-D for every known interference problem! Did you know that C-D makes and sells more interference filters than any one else? Chances are the solution to your filter problem is already waiting for you in our files. If we don't have the answer, we'll find it for you. Write for catalog to: Dept. I-33, Cornell-Dubilier Electric Corporation, General Offices, South Plainfield, New Jersey.

CORNELL-DUBILIER

world's largest manufacturers of filters

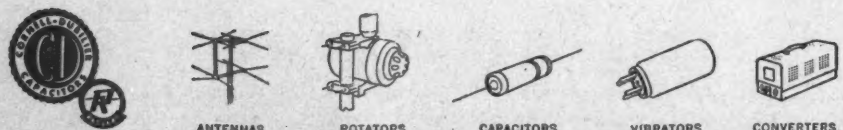

SOUTH PLAINFIELD, NEW JERSEY • NEW BEDFORD, WORCESTER AND CAMBRIDGE, MASSACHUSETTS • PROVIDENCE, RHODE ISLAND
INDIANAPOLIS, INDIANA • FUQUAY SPRINGS, NORTH CAROLINA • SUBSIDIARY, THE RADIART CORPORATION, CLEVELAND, OHIO

tion is characterized by $\omega_{gen} = \omega_b$ which means the tank circuit, at low r-f excitation, is in resonance with the generator frequency. The driving current then increases proportionally to the second power of V~. For $\omega_{gen} > \omega_b$ however, the I~ — V~ characteristic shown in Fig. 13 (b) is obtained. The negative slope shows a negative impedance resulting from the fact that the frequency feedback causes the tank circuit to run into resonance. At resonance, the current passes a minimum at a critical excitation

$$V_{crit} = \frac{1}{A}\left[1 - \left(\frac{\omega_b}{\omega_{gen}}\right)^2\right]. \quad (13)$$

When this critical value is exceeded, the tank circuit runs out of resonance and the I~ — V~ curve approaches a parabola.

Negative Impedance

The negative impedance is not to be confused with a negative resistance because it is confined to rms values of currents and voltages but the sign does not denote an inductive or capacitive component. Another implication is the important fact that a negative impedance cannot convert dc energy into ac energy as does a negative resistance. On the other hand, a negative impedance, in combination with a fixed preresistor, becomes bistable as illustrated in Fig. 13 (b).

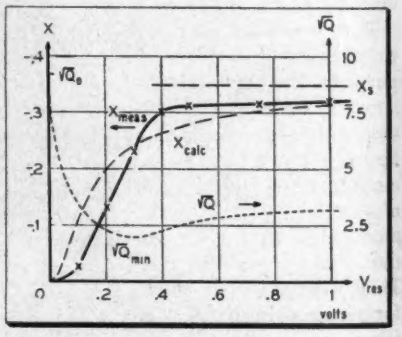

Fig. 12: Detuning and quality factors of a nonharmonic circuit vs. resonant voltage

Only in this respect, a negative impedance cannot convert dc energy alent to a negative resistance. The nonlinear I~ — V~ characteristic is intersected by the dashed loadline having the slope 1/r and originating at the generator voltage V_{gen}. Only the two points O′ and O″ of intersection are stable so that the driving current, under the influence of fluctuating generator voltages, jumps between the values I′ and I″. The similarity between a negative impedance and a negative resistance,

both in series with a constant resistor, is obvious. Hence we may say that the concept of a negative resistance is transferred from the field of dc into the ac field.

Practical Applications

Although the purpose of this paper is the explanation of the basic problem of frequency feedback rather than the description of practical applications, some examples may be given.

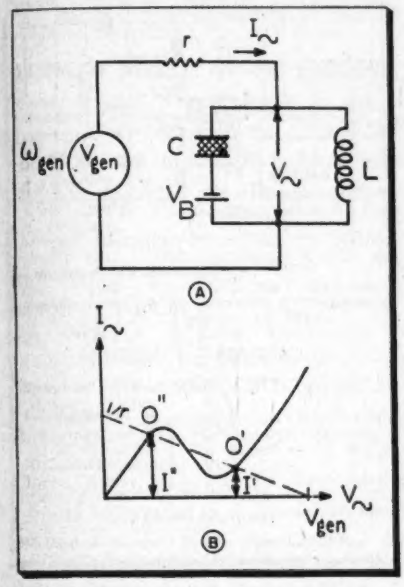

Fig. 13: Excited nonharmonic tank circuit (a) and the associated I~-V~ characteristic (b)

The simplest application is the conversion of AM into FM. For this purpose, the tank circuit of an oscillator is made nonharmonic by providing it with an iron-cored coil, a ferroelectric capacitor, or an RX-modulator. As soon as the amplitude of such an nonharmonic oscillator is modulated in any conventional way, the AM is accompanied by FM. This phenomenon may be utilized for neutralizing the parasitic FM of signal generators. Experiments have shown that a one per cent AM of 10 MC carrier frequency produces a frequency swing of 2 KC *without* unreasonable damping.

Frequency Shift Reception

Another example makes use of the opposite effect for the conversion of FM into AM for frequency-shift reception. Frequency-shift keyed transmission alternates between two discrete frequencies termed mark and space, respectively. The receiver is tuned to the transmitter's center frequency, often termed the phantom carrier. The discriminator

(*Continued on page* 134)



What is your Delay or Regulating Problem?

For the most effective solution use the
SIMPLEST, MOST COMPACT
MOST ECONOMICAL
HERMETICALLY SEALED

AMPERITE
THERMOSTATIC DELAY RELAYS

STANDARD

Provide delays ranging from 2 to 120 seconds.

- Actuated by a heater, they operate on A.C., D.C., or Pulsating Current.
- *Hermetically sealed.* Not affected by altitude, moisture, or other climate changes.
- Circuits: *SPST only*—normally open or normally closed.

Amperite Thermostatic Delay Relays are compensated for ambient temperature changes from −55° to +70°C. Heaters consume approximately 2 W. and may be operated continuously. The units are *most compact, rugged, explosion-proof, long-lived,* and—*very inexpensive!*



MINIATURE

TYPES: Standard Radio Octal, and 9-Pin Miniature.

PROBLEM? Send for Bulletin No. TR-81

BALLAST-REGULATORS

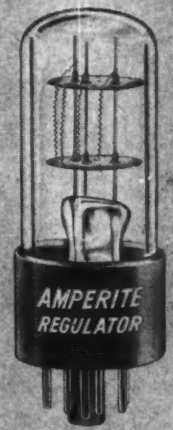

T9 BULB

- Amperite Regulators are designed to keep the current in a circuit ***automatically regulated*** at a definite value (for example, 0.5 amp).
- For currents of 60 ma. to 5 amps. *Operates on A.C., D.C., or Pulsating Current.*
- Hermetically sealed, light, compact, and most inexpensive.





Maximum Wattage Dissipation: T6½L—5W. T9—10W.

Amperite Regulators are the simplest, most effective method for obtaining *automatic regulation* of current or voltage. *Hermetically sealed,* they are not affected by changes in altitude, ambient temperature (−55° to +90°C), or humidity. Rugged; no moving parts; changed as easily as a radio tube.

Write for 4-page Technical Bulletin No. AB-51

AMPERITE CO., Inc. 561 Broadway, New York 12, N. Y.
In Canada: Atlas Radio Corp., Ltd., 560 King St., W., Toronto 2B

new

HEPPNER

"GUARANTEED COUNT" ELECTRO-DYNAMIC

speakers

With EXCLUSIVE "No-Rub" Voice Coil

ABSOLUTE UNIFORMITY TO YOUR SPECIFICATIONS BECAUSE:

- EACH FIELD COIL GUARANTEED TO CONTAIN GIVEN NUMBER OF TURNS within standard tolerance. Quality fully controlled because all coils are wound by Heppner. No wire-stretching or other quality-reducing shortcuts. Resistance and wire size to your exact specifications.

- THE *EXCLUSIVE* HEPPNER PERFECTLY ROUND "NO-RUB" VOICE COIL is now available in Electro-Dynamic Speakers. This coil is installed perfectly round by means of a Heppner developed process which eliminates all egg-shaped coils which cause rubs.

Electro-Dynamic Speakers are available with or without bucking coils, transformers, plugs and/or brackets to your specifications.

Engineered for efficiency and fine acoustical performance. Exceptionally thorough final inspection.

Write for further information today.

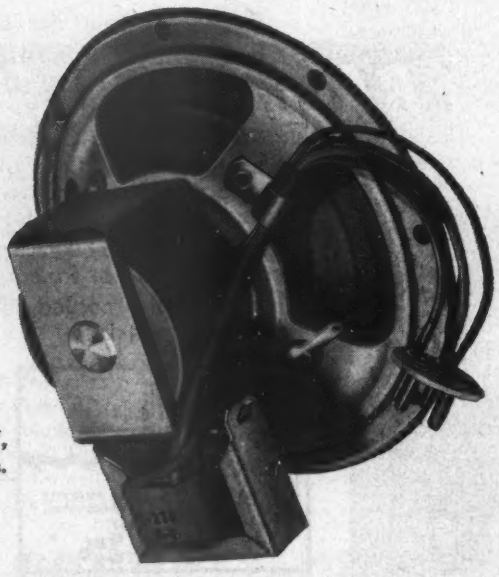

Available in 3", 4", 5", 6½", 10", 12" sizes.

HEPPNER

MANUFACTURING COMPANY

Round Lake, Illinois (50 Miles Northwest of Chicago)

Phone: 6-2161

SPECIALISTS IN ELECTRO-MAGNETIC DEVICES

Representatives:

James C. Muggleworth
506 Richey Ave., W., Collingswood, N. J.

Ralph Haffey
2417 Kenwood Ave., Ft. Wayne 3, Indiana

Irv. M. Cochrane Co.
408 So. Alvarado St., Los Angeles, California

of the frequency-shift receiver then is driven by the output of the limiter stage and comprises two nonharmonic tank circuits which perform minute tuning loops on both sides of the phantom carrier. For this purpose, one of the discriminator's tank circuits shown in Fig. 14 (a) contains a ferroelectric capacitor and the other an iron-cored coil. Their r-f voltages are rectified by two detectors which produce the

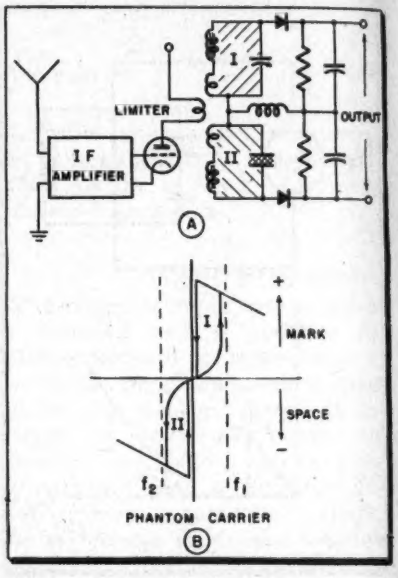

Fig. 14: Nonharmonic discriminator for frequency-shift reception (a) and tuning loops (b)

output voltage across a common load resistor. As a result, the output voltage versus transmitter frequency follows the curve shown in Fig. 14 (b). Mark and space produce equal potentials of opposite polarity.

A third example of application is a flip-flop gating device adapted to a parallel-gated binary-computing system and based on the explained bistability. Such a trigger device—which differs from the described circuitry only by series resonance circuits instead of parallel circuits—has been described previously.[3]

The description of additional applications is beyond the scope of this paper. Following the developed principle, the expert may develop other applications according to his own requirements.

REFERENCES

1) H. E. Hollmann, "Polaresistivity and Polaristors," *Proc. IRE*, vol. 40, pp. 538-545; May, 1952.
2) H. E. Hollmann, "Nonlinear Elements and Some Applications in AF and RF Circuits," *Proc. Nat. E. Conf.*, vol. 7, pp. 130-140; Feb., 1952; *Tele-Tech*, Apr. '52.
3) C. Isborn, "Ferroresonant Flip-Flops," *Electronics*, vol. 25, pp. 121-123; Apr. '52.
4) H.E. Hollmann, "Dielectric & Semiconductive Suspensions," *Tele-Tech*, Sept. '52.

This paper was first presented at the National Electronics Conference held in Chicago, Sept. 29-Oct. 1, 1952

IRE Program

(*Continued from page 77*)

INSTRUMENTATION II—SYMPOSIUM: TRANSISTOR MEASUREMENTS

"Transistor Metrology"—D. A. Alsberg, Bell Tel. Labs.
"Measurement of Transistor Parameters by CRO and Other Methods"—W. E. Morrow, Jr., MIT.
"Transistor Static Characteristics Obtained by Pulse Techniques"—D. R. Fewer, Bell Tel. Labs.
"Bridges for Measuring Junction Transistor Admittance Parameters"—L. J. Giacoletto, RCA Labs.
"A Transistor Alpha Sweeper"—H. G. Follingstad, Bell Tel. Labs.
"Rapid Tracing of Transistor Characteristics by Oscillographic Methods"—V. Mathis, General Electric.

SIGNIFICANT TRENDS IN AIRBORNE EQUIPMENT

"Some Systems Considerations in Flight Control Servomechanism Design"—R. J. Bibbero and R. Grandgent, Republic Aviation.
"Faired-In ADF Antennas"—L. E. Raburn, Electronics Research.
"Magnetic Amplifiers for Airborne Applications"—J. K. McKendry, General Precision Labs.
"Aircraft Electrical Power"—J. C. Dieffenderfer and G. W. Sherman, Wright Air Development Center.
"The Effects of Electronic Equipment Standardization on Aircraft Performance" G. C. Sumner, Consolidated Vultee.

ANTENNAS III—PROPAGATION

"Notes on Propagation"—L. A. Byam, Jr., Western Union.
"Tropospheric Propagation in Horizontally Stratified Media over Rough Terrain"—H. M. Swarm, R. N. Ghose, G. H. Keitel, U. of Washington.
"Radio Wave Scattering in Tropospheric Propagation"—J. W. Herbstreit, K. A. Norton, P. L. Rice and G. E. Schafer, National Bureau of Standards.
"Extended-Range Radio Transmission by Oblique Reflection from Meteoric Ionization"—O. G. Villard, Jr., A. M. Peterson, L. A. Manning and Von R. Eshleman, Stanford U.
"An Interpretation of Vertical Incidence Equivalent Height versus Time Recordings on 150 Kc/s"—R. Lindquist, Pennsylvania State College.

CIRCUITS III—TIME DOMAIN NETWORKS—DELAY LINES

"Continuously Variable Delay Line"—C. Berkely, Du Mont Labs.
"General Transmission Theory of Distributed Helical Delay Lines with Bridging Capacitance"—M. J. DiToro, Du Mont Labs.
"Distributed Constant Delay Lines with Characteristic Impedances Higher Than 5000 Ohms"—W. S. Carley, U. S. Naval Ordnance Lab.
"Helical Winding Exponential-Line Pulse Transformers for Millimicrosecond Service"—J. Kukel and E. M. Williams, Carnegie Institute of Technology.
"Time Domain Approximation by Use of Pade Approximants"—R. D. Teasdale, RCA.
"Frequency Transients in Idealized Linear Systems"—B. Gold, Hughes Aircraft.

ELECTRON DEVICES I—TRANSISTORS

"The Negative Resistance Diode"—I. A. Lesk and V. P. Mathis, General Electric.
"Reliability of Transistors"—W. R. Sittner and R. M. Ryder, Bell Tel. Labs.
"Characteristics of the M-1768 Transistor"—L. B. Valdes, Bell Tel. Labs.
"Development High Frequency Alloy Transistors"—C. W. Mueller and J. I. Pankove, RCA Labs.
"Behavior of Germanium Junction Transistors at Elevated Temperatures and Power Transistors Design"—L. D. Armstrong, RCA Labs.

INSTRUMENTATION III—ELECTRONICS

"The Response of a Panoramic Receiver to CW and Pulse Signals"—H. W. Batten, R. A. Jorgensen, A. B. Macnee and W. W. Peterson, U. of Michigan.
"A VHF Impedance Meter"—J. H. Mennie, Boonton Radio.
"Simplified Measurement of Incremental Pulse Time Jitter"—W. T. Pope, Griffiss Air Force Base.

(*Continued on page 136*)

new Berkeley PRINTED READOUT for ELECTRONIC COUNTERS

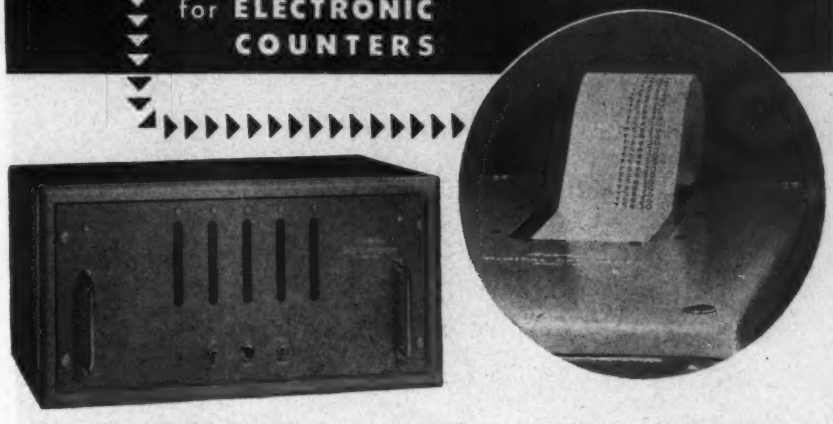

✱ DIRECT READING ✱ RAPID CYCLING ✱ LOW COST

PRINTED READOUT for high speed electronic counters is now available at low cost as a standard BERKELEY product. This Digital Recorder provides a direct means of permanently recording sequential count information in arabic numeral form on a standard adding machine tape. It is designed to operate from electronic counters, Time Interval Meters, Events-per-Unit-Time Meters, nuclear scalers, and other electronic totalizing devices. Most standard BERKELEY instruments now in use can be readily adapted for operation with the BERKELEY Digital Recorder, thus eliminating the need for purchase of new counting equipment.

THE DIGITAL RECORDER . . . is composed of a Digital Scanner and a Digital Printer. The first unit consists of a bank of readout decimal counting units essentially paralleling the totalizing function of the basic counting instrument from which they operate, and a selecting relay matrix to channel information from the counting circuit to the Digital Printer. This second unit presents a sequence of total counts in direct reading digital form on a standard adding machine tape.

A COMPLETE SYSTEM . . . of Electronic Counter and Digital Recorder then consists of three elements: a suitable electronic counting device, Digital Scanner, and Digital Printer. The latter two elements comprise the complete Digital Recorder. Modification D, a standard modification of the system, will permit original count information to be channeled directly into the Digital Scanner, thus eliminating the need for a separate electronic counter.

SPECIFICATIONS . . . Minimum counting period determined by the characteristics of the basic counting instrument. Maximum cycling rate: 1 printout every ¾ second. Indicating capacities 3, 4, 5 or 6 columns. Digital Scanner—20¾" x 10½" x 15" cabinet, wt. 70 lbs., standard 19" relay rack panel. Digital Printer—7½" x 8¼" x 14½" cabinet, wt. 20 lbs. Price, Digital Recorder, Model R-3 (3-column), $1050; Model R-4 (4-column), $1125; Model R-5 (5-column), $1200; Model R-6S (6-column, 100 kc), $1275; Model R-6 (6-column, 1 mc) $1325. Modification D (not available on 1 mc unit) $145.00. Prices f.o.b. factory.

M-5

Please request Bulletin 803

Berkeley Scientific
division of BECKMAN INSTRUMENTS INC.
2200 WRIGHT AVENUE • RICHMOND, CALIFORNIA

"DIRECT READING DIGITAL PRESENTATION OF INFORMATION"

smaller than a desk pen . . . just as convenient

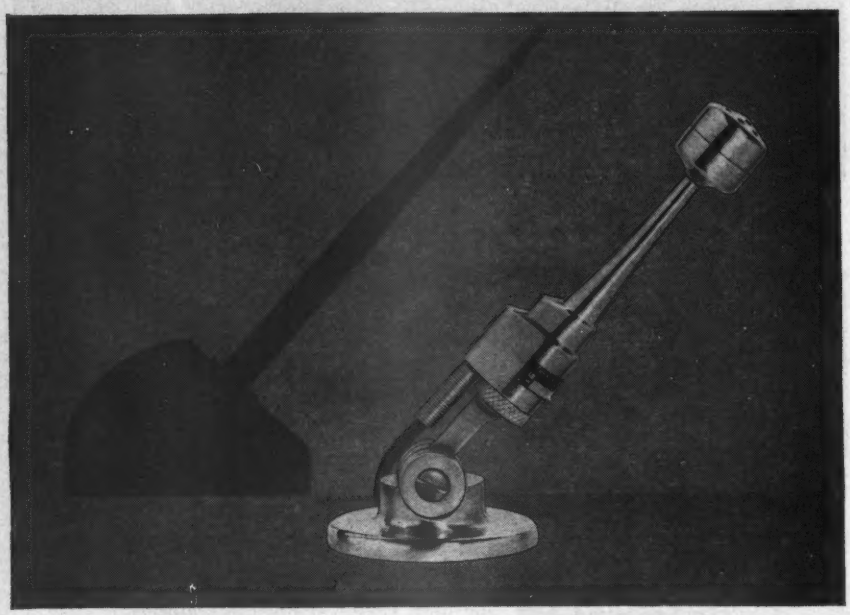

The NEW Turner C-4 Stand for Model 80 Microphone

The new C-4 stand gives complete maneuverability and convenience with the Model 80. It pivots the microphone in a 135° arc for any operational angle — swings parallel to base needing little more space than two packs of cigarettes.

The microphone is held firmly by the unique, positive-action hinge, yet moves smoothly and easily to any desired position without adjustment. Microphone quickly and easily removed.

This new, matching stand is solidly built of die-cast zinc overlaid with beautiful satin chrome plate. It is heavy enough to prevent tipping — it will not slide with the weight of the cord. The C-4 stand complements the graceful shape of the Model 80; the combined unit is an attractive but inconspicuous addition to a speakers' table. Ideal for use with wire recorders, public address systems, pulpits, office and factory call systems, amateur operators and other similar uses.

Model C-4 matching stand. 5/8"—27 thread.
List Price $5.75

Model 80 Microphone. List Price $15.95

TURNER

THE TURNER COMPANY

923 17th St., N. E. Cedar Rapids, Iowa

In Canada: Canadian Marconi Company, Toronto, Ont., and Branches

Export: Ad Auriema, Inc., 89 Broad Street, New York 4, N. Y.

"Wide-Band Wave Analyzer"—O. Kummer, Bell Tel. Labs.
"Ultra-Low Frequency, Three-Phase Oscillator"—G. Smiley, General Radio.

SYMPOSIUM: TRENDS IN MOBILE COMMUNICATIONS

"The Effects of Selectivity, Sensitivity and Linearity in Radio Circuits on Communications Reliability and Coverage"—J. G. Schermerhorn, Rome Air Development Center.
"Single Sideband for Mobile Communications"—A. Brown and R. H. Levine, Coles Signal Lab.
"Major Factors in Mobile Equipment Design with Emphasis on 460 MC Mobile Equipment Characteristics"—John Byrne and A. A. Macdonald, Motorola.
"Field Experience with 450 MC Mobile Systems"—P. H. Bellingham and J. Q. Montrese, Bell-Mont Communications Service.

Wednesday, March 25

ELECTRON DEVICES II—ELECTRON TUBES

"Gas Pressure Effects on Ionization Phenomena in High-Speed Hydrogen Thyratrons"—W. C. Dean, Odessa, Texas and G. W. Penney and J. B. Woodford, Jr., Carnegie Institute of Technology.
"Low Noise, Hot Cathode, Gas Tubes"—E. O. Johnson, W. M. Webster and J. B. Zirker, RCA Labs.
"New Dispenser Type Thermionic Cathode"—R. Levi.
"Multi Output Beam Switching Tubes for Computers and General Purpose Use"—S. Kuchinsky, Burroughs Adding Machine.
"An Equivalence Principle in High Frequency Tubes"—Robert Adler, Zenith.

CIRCUITS IV—ACTIVE NETWORKS—TRANSISTORS

"Transient Analysis of Junction Transistor Amplifiers"—J. J. Suran and W. F. Chow, General Electric.
"The Grounded-Collector Transistor Amplifier at Carrier Frequencies"—F. R. Stansel, Bell Tel. Labs.
"Symmetrical Properties of Transistors and Their Application"—G. C. Sziklai, RCA Labs.
"A Study of Transistor Circuits for Television"—G. C. Sziklai, R. D. Lohman and G. B. Herzog, RCA Labs.
"Conductance Curve Design of Relaxation Circuits"—K. A. Pullen, Aberdeen Proving Ground.
"Transistor Relaxation Oscillators"—S. I. Kramer, Fairchild Guided Missiles.

NOISE AND MODULATION

"Noise Problems of Theoretical and Practical Interest"—B. Gold, Hughes Aircraft.
"A Note on Receivers for Use in Studies of Signal Statistics"—R. Deutsch and H. V. Hance, Hughes Aircraft.
"Amplitude Modulation by Plate Modulation of CW Magnetrons"—J. S. Donal, Jr., and K. K. N. Chang, RCA Labs.
"Comparison of Modulation Methods"—R. M. Page, Naval Research Lab.
"A Technique of Intermodulation Interference Determination"—A. J. Beauchamp, Rome Air Development Center.

SYMPOSIUM: TELEVISION BROADCASTING

"The Design of Speech Input Consoles for Television"—R. H. Tanner, Northern Electric.
"Building TV Broadcast Facilities for Growth, Flexibility and Economy"—A. R. Kramer and E. R. Kramer, Kramer, Winner and Kramer.
"Fashions in TV Transmitting Antennas"—F. G. Kear, Kear and Kennedy, and J. G. Preston, American Broadcasting Co.
"High Gain Amplifiers for High Power Television Transmitters"—J. Ruston, DuMont Labs.
"Optimum Utilization of the Radio Frequency Channel for Color TV"—R. D. Kell and A. C. Schroeder, RCA Labs.

QUALITY CONTROL METHODS APPLIED TO ELECTRON TUBE AND ELECTRONIC EQUIPMENT DESIGN

"Use of Statistical Tolerances to Obtain Wider Limits on Tube Component Dimensions"—E. V. Space, RCA.
"Tolerance Considerations in Electronic Product Design"—R. C. Miles, Airborne Instruments Lab.
"Distribution Patterns for the Attributes of Electronic Circuitry"—R. F. Rollman and E. D. Karmiol, DuMont Labs.
"The Application of Statistics to Field Sur-

Professional Groups

A warm reception has been accorded to the Professional Groups operating within the framework of the IRE. Group membership, and the number of Groups, has grown significantly since the plan's inception in 1948. The formation of three additional Groups since last year brings the total up to 19. In line with the trend toward scientific specialization, nine Professional Groups are planning 11 special symposia on subjects of timely interest in their respective fields.

veillance of Product Performance"—R. Herd, Aeronautical Radio.
"Reliability of Electron Tubes in Military Applications"—E. F. Jahr, Aeronautical Radio.
"Dynamic Environment Testing"—D. T. Geiser, Boeing Airplane.

SEMINAR: ACCOUSTICS FOR THE RADIO ENGINEER—I

"Fundamental Theory"—L. L. Beranek, MIT.
"Microphones"—H. F. Olson, RCA.
"Loudspeakers"—H. S. Knowles, Industrial Research Products.

ELECTRON DEVICES III—MICROWAVE TUBES

"High Power Traveling Wave Tube Amplifiers"—M. Ettenberg, Sperry Gyroscope.
"Operation of the Traveling-Wave Tube in the Dispersive Region"—L. A. Roberts and S. F. Kaisel, Stanford U.
"A Traveling-Wave Electron Buncher"—R. B. Neal, Stanford U.
"Some Properties of Periodically Loaded Structures Suitable for Pulsed Traveling Wave Tube Operation"—M. Chodorow and E. J. Nalos, Stanford U.
"Experiments on Millimeter Wave and Light Generation"—H. Motz, W. Thon and R. N. Whitehurst, Stanford U.

INFORMATION THEORY I—RECENT ADVANCES

"Recent Advances in Information Theory"—L. DeRosa, Federal Telecommunication Labs.
"Radar Problems and Information Theory"—H. Davis, Airmateriel Command.
"Analysis of Multiplexing and Signal Detection by Function Theory"—N. Marchand, Marchand Electronic Labs.
"Optimum Nonlinear Filters for the Extraction and Detection of Signals"—L. A. Zadeh, Columbia U.
"Detection of Information by Moments"—J. J. Slade, Jr., S. Fich, D. A. Molony, Rutgers U.

COMMUNICATIONS SYSTEMS

"Automatic-Tuning Communications Transmitter"—M. C. Dettman, Federal Telecommunication Labs.
"Doubling of Channel Capacity of Single Sideband Systems"—C. D. May, Office of Chief Signal Officer.
"Performance of Space and Frequency Diversity Receiving Systems"—R. E. Lacy and M. Acker, Fort Monmouth; and J. L. Glaser, Bell Tel. Labs.
"Effect of Hits in Telephotography"—P. Mertz and K. W. Pfleger, Bell Tel. Labs.
"Reliability of Military Electronic Equipment and Our Ability to Maintain it for War"—A. S. Brown, Stanford Research Institute.

SYMPOSIUM: TELEVISION BROADCASTING AND UHF

"A Flexible TV Studio Intercommunication System"—R. D. Chipp and R. F. Bigwood, DuMont TV Network.
"CBS Television's Hollywood TV City: Video, Audio and Intercommunication Facilities"—R. O'Brien, R. Monroe and P. Fish, Columbia Broadcasting System.
"An Experimental Study of Wave Propagation at 850-MC"—J. Epstein and D. W. Peterson, RCA Labs.
"A Typical UHF Installation"—W. H. Sayer, Jr., DuMont Labs.
"High Power UHF Klystron Application"—A. E. Rankin, General Electric.
"High Power UHF Klystron Amplifier Design"—N. P. Hiestand, Varian Associates.

(*Continued on page* 138)

*Autosyn**
SYNCHROS
Precision-Built by
ECLIPSE-PIONEER

VISIT OUR DISPLAY at the I. R. E. show Grand Central Palace March 23-26 BOOTHS 1-413, 1-415, 1-417, 1-419

For more than 18 years, Eclipse-Pioneer has been a leader in the development and production of high precision synchros for use in automatic control circuits of aircraft, marine and other industrial applications. Today, thanks to this long experience and specialization, Eclipse-Pioneer has available a complete line of standard (1.431" dia. X 1.631" lg.) and Pygmy (0.937" dia. X 1.278" lg.) Autosyn synchros of unmatched precision. Furthermore, current production quantities and techniques have reduced cost to a new low. For either present or future requirements, it will pay you to investigate Eclipse-Pioneer high precision at the new low cost.

*REG. TRADE MARK BENDIX AVIATION CORPORATION

AVERAGE ELECTRICAL CHARACTERISTICS—AY-200 SERIES**

	Type Number	Input Voltage Nominal Excitation	Input Current Milliamperes	Input Power Watts	Input Impedance Ohms	Stator Output Voltages Line to Line	Rotor Resistance (DC) Ohms	Stator Resistance (DC) Ohms	Maximum Error Spread Minutes
Transmitters	AY201-1	26V, 400~, 1 ph.	225	1.25	25+j115	11.8	9.5	3.5	15
	AY201-4	26V, 400~, 1 ph.	100	0.45	45+j225	11.8	16.0	6.7	20
Receivers	AY201-2	26V, 400~, 1 ph.	100	0.45	45+j225	11.8	16.0	6.7	45
Control Transformers	AY201-3	From Trans. Autosyn	Dependent Upon Circuit Design				42.0	10.8	15
	AY201-5	From Trans. Autosyn	Dependent Upon Circuit Design				250.0	63.0	15
Resolvers	AY221-3	26V, 400~, 1 ph.	60	0.35	108+j425	11.8	53.0	12.5	20
	AY241-5	1V, 30~, 1 ph.	3.7	—	240+j130	0.34	239.0	180.0	40
Differentials	AY231-3	From Trans. Autosyn	Dependent Upon Circuit Design				14.0	10.8	20

**Also includes High Frequency Resolvers designed for use up to 100KC (AY251-24)

AY-500 (PYGMY) SERIES

Transmitters	AY503-4	26V, 400~, 1 ph.	235	2.2	45+j100	11.8	25.0	10.5	24
Receivers	AY503-2	26V, 400~, 1 ph.	235	2.2	45+j100	11.8	23.0	10.5	90
Control Transformers	AY503-3	From Trans. Autosyn	Dependent Upon Circuit Design				170.0	45.0	24
	AY503-5	From Trans. Autosyn	Dependent Upon Circuit Design				550.0	188.0	30
Resolvers	AY523-3	26V, 400~, 1 ph.	45	0.5	290+j490	11.8	210.0	42.0	30
	AY543-5	26V, 400~, 1 ph.	9	0.1	900+j2200	11.8	560.0	165.0	30
Differentials	AY533-3	From Trans. Autosyn	Dependent Upon Circuit Design				45.0	93.0	30

For detailed information, write to Dept. B.

ECLIPSE-PIONEER DIVISION of Bendix AVIATION CORPORATION
TETERBORO, NEW JERSEY
Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

Kenyon

SPECIAL Transformers

Have Many Applications

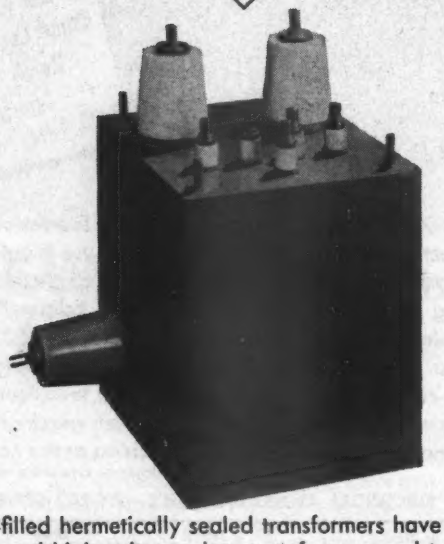

Kenyon oil-filled hermetically sealed transformers have particular application to pulse and high voltage plate transformers and to charging reactors.

They are specially valuable for reactors and plate transformers operating on 400 cycle or higher frequency primary supply voltage.

Because of their internal characteristics oil-filled transformers present different problems from conventional types. Cases must be correctly designed, terminals properly constructed and sealing methods highly efficient to eliminate oil leakage. Kenyon has successfully solved these problems.

The result is a unit with high quality insulation, small in size yet possessing excellent life and exceptional dependability.

Because of substantial savings in size and simplicity of insulation, use of Kenyon Oil-Filled Transformers frequently results in lower final cost.

Booth No. 1-615 I.R.E. Show

No matter what your transformer requirements may be contact Kenyon first. Our engineers will endeavor to show you how you can increase efficiency at low cost by choosing a transformer from the complete Kenyon line.

KENYON TRANSFORMER CO., Inc.

840 Barry Street, New York 59, N. Y.

"High Power UHF Television Broadcasting Systems"—H. M. Crosby, General Electric.

MICROWAVES I—SYMPOSIUM: MANUFACTURE OF MICROWAVE EQUIPMENT

"How to Design Microwave Components for Ease of Assembly"—F. Neukirch, N.R.K. Mfg.

"The Design of Microwave Components for Production"—H. J. Riblet, Microwave Development Labs.

"Fabrication of Microwave Components Employing the Dip Brazing Process"—J. Rudolph, Glenn L. Martin.

"Electroforming with Copper, Nickel and Other Metals"—C. L. Duncan.

"Manufacturing 'Microstrip' Printed Circuit Components"—H. F. Engelman (probable speaker), Federal Telecommunication Labs.

SEMINAR: ACOUSTICS FOR THE RADIO ENGINEER—II

"Phonograph Reproducers"—B. B. Bauer, Shure Brothers.

"Tape Recording"—M. Camras, Armour Research.

"Studio Acoustics"—H. J. Sabine, Celotex.

Thursday, March 26

INFORMATION THEORY II—THEORETICAL

"Error Probabilities of Binary Data Transmission Systems in the Presence of Random Noise"—S. H. Reiger, Air Force Cambridge Research Center.

"Statistical Properties of the Output of Certain Frequency Sensitive Devices"—G. R. Arthur, Sperry Gyroscope.

"Cross-Correlation Applied to Automatic Frequency Control"—M. J. Stateman, Sylvania.

"Approximate Probability Density Function of First Level Crossing for Linearly Increasing Signal Plus Noise"—G. Preston and R. Gardner, Philco.

"A Design Criteria for the Optimum Demodulation of Generalized Modulated Signals"—F. W. Lehan, Calif. Institute of Technology.

BROADCAST AND TELEVISION RECEIVERS—I

"Gain Stable Mixers and Amplifiers with Current Feedback"—G. E. Boggs, National Bureau of Standards.

"Video Amplifiers with Instantaneous Automatic Gain Control"—W. E. Ayer, Stanford U.

"An Automatic Level-Setting Sync and ACC System"—E. O. Keizer, RCA Labs., and M. G. Kroger, Motorola.

"Packaged Adjacent Channel Attenuation for Television Receivers"—J. P. Van Duyne, DuMont Labs.

"Methods of Matrixing in an NTSC Color Television Receiver"—W. M. Quinn, General Electric

MICROWAVES II—DISTINCONTINUITIES AND TRANSITIONS

"R-F Measurements on Metallic Delay Media"—S. B. Cohn, Sperry Gyroscope.

"Impedance Measurement in a Circular Waveguide with TE_{01} Excitation"—L. S. Sheingold, Sylvania.

"Experimental Determination of the Properties of Microstrip Components"—M. Arditi Federal Telecommunication Labs.

"A Wideband Transition Between Waveguide and Coaxial Line"—N. A. Spencer and H. A. Wheeler, Wheeler Labs.

"A Contribution to the Ridge Guide Problem"—B. A. Lengyel, Hughes Aircraft.

RADIO TELEMETRY

"Telemetering Requirements for Upper Air Rocket Research Experiments"—M. O'Day, Air Force Cambridge Research Center.

"Telemetering—Broad Band on Short Order"—T. F. Jones, Jr., General Electronic Labs.

"Flutter Compensation for FM/FM Telemetering Recorder"—J. T. Mullin, Bing Crosby Enterprises.

"A Magnetic Tape Recording System for Precision Data"—L. L. Fisher, Ampex Electric.

"An Improved FM/FM Decommutator Ground Station"—F. N. Reynolds, Ralph M. Parsons Co.

"Some Industrial Applications of Telemetry"—F. N. Stephens, Midwest Research Institute, and L. Bergren, Great Lakes Pipe Line Co.

AUDIO

"Sound Reinforcement System, General As-

sembly, United Nations"—L. L. Beranek, MIT, and C. W. Goyder, United Nations.
"A Variable Time Delay"—K. Goff, MIT.
"A Flux Sensitive Head for Magnetic Recording Play Back"—D. E. Wiegand, Armour Research.
"Uniaxial Microphone"—H. F. Olson, J. Preston and J. C. Bleazey, RCA Labs.
"Sound Pressure Measurement Between 50 and 220 BD"—J. K. Hilliard, Altec Lansing.

ENGINEERING MANAGEMENT

"Report of Year's Activities by the Chairman of the Professional Group on Engineering Management"—R. I. Cole, Rome Air Development Center.
"General Problems of Engineering Management Facing the Electronics Industry"—H. Pratt, Telecommunications Advisor to the President.
"Research and Development Problems of Engineering Management in the Electronics Industry"—M. J. Kelly, Bell Tel. Labs.
"Production Aspects of Engineering Management in the Electronics Industry"—W. A. McDonald, Hazeltine.
"What the Military Services Expect from Engineering Management of the Electronics Industry"—D. L. Putt, Air Research and Development Command.

INFORMATION THEORY III—CODING

"A Necessary and Sufficient Condition for Unique Decomposition of Coded Messages"—A. A. Sardinas and G. W. Patterson, Burroughs Adding Machine.
"A Systematic Survey of Coders and Decoders"—B. Lippel, Fort Monmouth.
"Method for Time or Frequency Compression-Expansion of Speech"—G. Fairbanks, W. L. Everitt and R. P. Jaeger, U. of Illinois.
"A New Coding System for Pulse Code Modulation"—A. G. Fitzpatrick, Burroughs Adding Machine.
"Coincidence Detectors for Binary Pulses"—C. Gates, Calif. Institute of Technology.

BROADCAST AND TELEVISION RECEIVERS—II

"Factors Affecting the Design of VHF-UHF Tuners"—E. H. Boden, Sylvania.
"Theory of A. F. C. Synchronization"—W. J. Gruen, General Electric.
"Standardization of Printed Circuit Materials for Mechanized Radio Assembly"—W. Hannahs, J. Caffiaux and N. Stein, Sylvania.
"A Color TV Receiver for the NTSC System"—K. E. Farr, Westinghouse.
"A Simple Pickup Camera Attachment for Television Receivers"—V. K. Zworykin, L. E. Flory and W. S. Pike, RCA Labs.

MICROWAVES III—FERRITES AND DETECTORS

"Space Charge Detector for Microwaves"—A. B. Bronwell, J. May, C. Nitz, T. C. Wang, and H. Wachowski, American Society for Engineering Education.
"Low Level Synchronous Mixing"—M. E. Brodwin, C. M. Johnson, Johns Hopkins U., and W. M. Waters, Bendix Radio.
"Guided Wave Propagation Through Ferrites and Electron Gases in Magnetic Fields"—L. Goldstein, M. Gilden, and J. Etter, U. of Illinois.
"Cavities with Complex Media"—A. D. Berk and B. Lax, MIT.
"Resonance in Cavities with Complex Media"—B. Lax and A. D. Berk, MIT.

REMOTE CONTROL SYSTEMS

"The Organization of a Digital Real Time Simulator"—H. J. Gray, Jr., U. of Pennsylvania.
"Control System Engineering Applied to Suspension Systems"—C. J. Martin, R. Jeska and E. B. Therkelsen, U. of Michigan.
"Experimental Evaluation of Control Systems by Random-Signal Measurements"—W. W. Seifert, MIT.
"Extension of Conventional Techniques to the Design of Sampled-Data Systems"—W. K. Linvill and R. W. Sittler, MIT.
"Generalized Servomechanism Evaluation"—W. P. Caywood and W. Kaufman, Carnegie Institute of Technology.
"Method for Reducing the Forced Dynamic Error of Closed-Loop Systems"—L. H. King, MIT.

they can't shake loose...

if the clamp is made by BIRTCHER



There is a Birtcher Clamp... *or one can be designed* ...for every tube you use or intend to use.

Regardless of the type tube or plug-in component your operation requires... and regardless of the vibration and impact to which it will be subjected... a Birtcher Tube Clamp will hold it securely and *rigidly* in place.

Catalog and samples sent by return mail.

The BIRTCHER CORPORATION
4371 Valley Blvd. Los Angeles 32, Calif.

Please send catalog and samples by *return mail.*

Company_____
Attention of:_____
Address_____
City_____ State_____

Panel Indicators for all Applications

JOHNSON PILOT LIGHTS

All the qualities needed for clear, positive indication are available in all Johnson Pilot Lights. Furnished from stock with full or controlled brilliance; faceted or smooth jewels, plain or frosted. Colors are clear, red, green, amber, blue or opal.

WIDE ANGLE

147-1220 UL Approved. For economical, continuous operation with neon or low powered incandescent bulbs. Double contact bayonet base contains series current-limiting resistor. Red, amber or clear Lucite cap transmits light with good efficiency.

VARIABLE LIGHT INTENSITY

147-1519 Camera type shutter. Rotation of jewel head varies light from full brilliance to off. Uses G6 double contact bayonet based bulb. Other types available with polarized discs for light variation.

TRUE COLOR INDICATION

147-1034 UL Approved. Internally frosted jewel with plastic backing color disc eliminates false indication from external light. Color does not appear until lighted. Disc may be specially imprinted and arranged for continuous visibility or only when lamp is lighted.

ECONOMY DETACHABLE SOCKET

147-800 Chrome plated friction jewel holder. Lamp replaceable from front or rear of panel. Socket detachable from panel bushing. Insulated solder terminals. For miniature screw, candelabra screw or bayonet based bulbs.

Send for Catalog 973

Select Pilot Lights exactly suited to your needs from the complete Johnson line. Write us your requirements and we will be glad to suggest suitable selections.



E. F. JOHNSON COMPANY

CAPACITORS, INDUCTORS, SOCKETS, INSULATORS, PLUGS, JACKS, DIALS, AND PILOT LIGHTS

208 SECOND AVENUE SOUTHWEST • WASECA, MINNESOTA

BOOKS

Filter Design Data for Communication Engineers

By J. H. Mole. Published 1952 by John Wiley & Sons, Inc., 440 Fourth Ave., New York 16, N.Y. 252 pages. Price $7.50.

It would be surprising if this handbook on filter design did not receive a warm reception from engineers engaged in circuit design. This is a practical book, no effort being made to explain theoretical principles. As such, it should relieve the practical engineer of much of the labor that is often spent on routine calculations. The volume contains 127 drawings and charts, and 56 tables, many giving specific design examples. Chapters 1 through 7 cover the familiar symmetrical and dissymmetrical filters, impedance transformation, losses and terminal sections. Chapter 8, on Tchebycheff behavior of stop-band attenuation, is of notable interest. Chapters 9 through 12 include the effects of dissipation, tolerances, tables of useful functions, and simpler filters. AJF

Dictionary of Conformal Representations

By H. Kober. Published 1952 by Dover Publications, Inc., 1780 Broadway, New York 19, N.Y. 224 pages. Price $3.95.

The use of conformal transformations is a significant aid in simplifying the analysis of two-dimensional electric and magnetic fields. Difficult problems become more amenable to solution because the actual coordinates are represented by an equivalent system which permits the field's characteristics to be compared with familiar geometries.

This handy reference should be of inestimable aid, not only to the electrical engineer, but to the aerodynamicist and physicist as well. Incorporating 447 diagrams, the book contains a large number of transformations which are classified according to their analytic functions. These time-saving setups should eliminate much of the laborious work involved in deriving a particular configuration. Of notable value are the linear, bilinear and Schwartz-Christophel transformations. This unique volume, originally prepared for the British Admiralty, effectively fills the need for an aid in solving Laplace's equation in two dimensions, and is highly recommended. AJF

Advanced Antenna Theory

By Sergei A. Schelkunoff. Published 1952 by John Wiley & Sons, Inc., 440 Fourth Ave., New York 16, N.Y. 216 pages. Price $6.50.

The engineer and mathematician engaged in antenna work should find this authoritative work a valuable addition to their collections of technical books. Of necessity, this is a somewhat sophisticated book, the problems of advanced antenna theory often being of an inherently complex nature. The primary contribution of this work is the concise

presentation of mathematical methods for solving antenna problems, including material which has not been published previously. Where possible, the author stresses the resemblance and compatibility with established circuit theory.

The book is divided into six main sections. Part 1, discussing spherical waves, covers Maxwell's equations, transmission lines and other "groundwork" material. Part 2, covering mode theory of antennas, is the core of the work and makes up one-third of the volume. Included are the author's theory of conical antennas and thin antennas of arbitrary shape. The remaining sections encompass spheroidal antennas, integral equations, cylindrical antennas, and natural oscillations. Inserted between the main text and appendixes are 44 interesting problems and their answers, rounding out a highly instructive and reasonably comprehensive volume. AJF

BOOKS RECEIVED

Television Factbook No. 16

Edited by Martin Codel and staff. Published 1953 by Television Digest, Wyatt Bldg., Washington 5, D. C. 268 pages. Price $3. Compilation contains directory of post-freeze TV stations and applications, markets, statistics, manufacturers, personnel, trade associations, publications, and map of network interconnections.

Proceedings of the National Electronics Conference—1952

Vol. 8, National Electronics Conference, 852 E. 83rd Street, Chicago 19, Illinois. 835 pages, Charts, Diagrams, Tables, 9¼ by 6¼ inches, case bound, $5.00. This book contains all of the 97 technical papers presented at the 1952 conference covering electronic research, development, and application in antennas, the assembly and measurement of components, audio, circuits, coding and recording techniques, computers, delay lines and HF test equipment, electronic instruments, engineering management, industrial measurements, magnetic amplifiers, memory tubes, radar, radio navigation, reliability of components and equipment, semiconductors, servomechanism, television, transistors, and waveguides. Volumes 2, 4, 5, 6 and 7 for previous conferences may also be obtained for $5.00 per copy.

Radioactivity Measures Semiconductor Impurities

The use of radioactivity methods has greatly accelerated research in semiconductor materials used in transistors, according to Dr. George H. Morrison of Sylvania Electric Products Inc. It is possible to measure impurities of one part in 100 million by radioactivity methods in germanium. Conventional chemical methods of measurements are ineffective at these extremely low concentrations.

Containers, called boats or crucibles, made of the purest available graphite, are irradiated with neutrons in the nuclear reactor at the Brookhaven National Lab. The containers are then used in the melting of the germanium metal. The small amounts of radioactive impurities in the container are transferred to the germanium during the melting process. The amounts transferred may be determined by the standard methods of measuring the intensity and rate of decay of the radioactive emission.

TODAY'S COMMUNICATION TREND

IS TOWARD SINGLE-SIDEBAND

SINGLE-SIDEBAND RECEIVER MODEL 47

TRIPLE-DIVERSITY SINGLE-SIDEBAND MODEL 155

"See you at the show"

BOOTH 4-808 I.R.E. SHOW GRAND CENTRAL PALACE · N.Y.C. MARCH 23-26

The Crosby Triple-Diversity Single-Sideband Receiver, Model 155 (left), and Single-Sideband Receiver, Model 47 (right), provides the ultimate in performance for long-range radio reception. Receives all forms of double and single-sideband transmission including reduced-carrier single-sideband transmission and amplitude-modulation or phase-modulation transmission.

For program, voice, tone-multiplex and twin-channel operation: optimum performance in rejecting interference; protected against jamming; precision performance.

The equipment is approximately one-third the size, weight and cost of single-sideband receiving equipment heretofore available, yet provides a new standard of performance under severe conditions of interference and fading.

The complete triple-diversity equipment, Model 155, is contained in one standard-size cabinet rack. The Model 47 single-sideband receiver requires only 28" of vertical panel space.

CROSBY

• *Send for our descriptive booklets on this equipment, giving complete details.*

CROSBY LABORATORIES, Inc.

ROBBINS LANE • HICKSVILLE, N. Y.



Measure, Cut and Strip Insulated Wire

IN ONE SPEEDY OPERATION

on ARTOS Automatic MACHINES

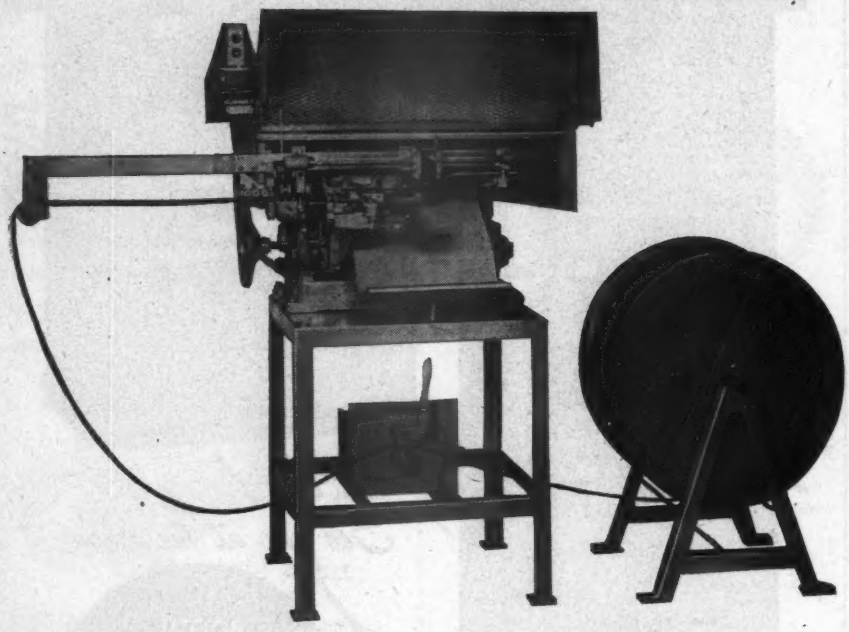

Does your production require cutting and stripping of insulated electric wire, cord, cable, etc.?

You can produce finished leads *much faster* . . . as many as 3000 per hour in 15-in. lengths . . . on this Artos Automatic Machine. Substantial savings are obtained over the best manual or semi-automatic methods.

Operation is fully automatic—wire is taken from the reel, measured, cut to length and stripped at one or both ends. Unskilled help can handle the machine. Set-up is easy for different wire types, cut lengths and stripped lengths.

MODEL CS-6E CAPACITY

Finished Pieces Per Hour—From 3000 per hour up to 15 in. lengths to 500 per hour in 64-97 in. lengths.

Maximum Stripping Length—1½ in. at each end (greater stripped lengths are special).

Maximum Cutting Length—97 in.

Minimum Cutting Length—2 in. (also as short as ⅞ in. under certain conditions).

Types of Wire Handled—Practically all types of solid or stranded single conductor wires, parallel cord, heater cord, service cord, etc.

Maximum Wire Size—No. 10 stranded or No. 12 solid.

Other Artos Machines

The complete line of Artos automatic wire cutting and stripping machines will handle *cut lengths* from 1 in. to 60 ft., *stripped lengths* to 6½ in. at one end and 8½ in. at the other, *wire* from No. 12 to No. 000 gauge, and up to 3600 pieces per hour. Ask for recommendations on your problems.

WRITE FOR BULLETIN

Get the complete story. Write for Bulletin 35-C on Artos Model CS-6 machines.

Automatic Wire Cutting and Stripping

ARTOS ENGINEERING CO.

2753 S. 28th St. • Milwaukee 46, Wis.

CR Tube Presentations

(*Continued from page* 90)

from 1.4 to 3.0 for various P7 phosphor screen compositions and processing. For RCA screen material having a ZnS to CdS composition ratio of 82 to 18, the accelerating voltage exponent was determined experimentally as 2.5 for accelerating potentials in the range 1.5 to 6.0 kv. This figure will be used.

Having calibrated the various nonlinearities which limit the peak brightness of the pip it is now possible to calculate peak brightness. However, the mere multiplication of the light per excitation by the number of excitations per second will not give the amount of light emitted per second nor average brightness. It is necessary to modify an expression which defines saturation brightness for conditions of repetitive pulse excitation. The peak brightness reached during one target scan can be obtained by multiplying CRT brightness by the buildup factor obtained from Fig. 6, but during the remainder of the frame time no more pulses will be received to excite the same spot on the CRT phosphor and the brightness will decay according to the curve of Fig. 3. Since the major part of the light energy is contained under the exponential curve having an α of -1, this approximation was used to calculate the curve of Fig. 7 which shows the relationship between target scans per second and the total light output. The total light output can be obtained by multiplying the peak brightness by the Scans per Second Factor, S, derived from Fig. 7. This factor varies from a very low value at low scan or frame rates to near unity at ten or more scans per second.

The total light energy and hence the visual stimulation of a radar presentation as a function of time and radar parameters can now be written. Since this expression is a measure of the visual stimulation derived from a radar system CRT presentation, it can also be considered as a radar system presentation quality factor for comparison with other radar systems.

Effective Pip Brightness $= 19.8(10^{-9})\ IE^{2.5}FBS$ Foot Lamberts Effective

where $19.8(10^{-9})$ is a constant characteristic of the P7 phosphor

I is effective CRT screen current density in $\mu a/cm^2$ derived from Fig. 4.

E is CRT final anode accelerating voltage, volts

F is the Excitation Time Brightness Factor, from Fig. 5

B is Brightness Buildup Ratio from Fig. 6

S is the Scans per Second Factor from Fig. 7

Having arrived at the effective brightness of the radar presentation it is now necessary to consider those factors which degrade the ability of the observer to see the pip, namely, receiver noise, background light and size of the pip and presentation.

Subjective tests indicate noise level, from whatever source, adversely affects perception time in two ways. It increases the average field brightness of the CRT, thus decreasing contrast ratio, and it clutters up the presentation resulting in considerable confusion to the operator. Under conditions of low ambient light, noise brightness about two-thirds pip brightness, and noise pips the same physical size as signal pips, perception time with noise increases by a factor of two on a 1-in. presentation and by a factor of more than seven on a 6-in. presentation. Since the resultant deterioration of CRT intelligence perception due to noise is considerably dependent upon a particular radar system and upon the method of utilizing the receiver signal for the CRT display, it is not possible to take noise into consideration in a general formula for perception time. Needless to say, its effects should be reduced to a minimum by the best techniques available.

The light reflected from the CRT phosphor is equal to the brightness of the ambient light, A, times the coefficient of reflectivity of the CRT phosphor. In optics, contrast ratio is expressed as the difference between the brightness of the object and the brightness of the background, divided by the brightness of the object. On the CRT the "object" is a pip whose intensity is equal to the phosphor brightness, P. plus the reflected ambient light brightness, Ar where r is the coefficient of reflectivity of the phosphor. When incident light falls on the CRT face plate at an angle, θ, then the effective incident light is A sin θ, and the reflected light is Ar sin θ and

$$\text{Contrast Ratio} = \frac{P}{P + Ar \sin \theta}.$$

Contrast ratio is a major factor in determining what can be seen and the time necessary to see it. Although it is recognized that the ability to see also depends upon the absolute brightness of the pip and its background, in radar displays the range of brightness of the pip encountered in normal displays is not very great and hence as a close approximation it is possible to use

(*Continued on page* 144)

KLEIN

QUALITY PLIERS SPECIALLY DESIGNED FOR THE ELECTRONICS INDUSTRY

Now, Klein quality pliers are available in new compact patterns for precision wiring and cutting in confined space. Note, too, the replaceable leaf spring that keeps the plier in open position, ready for work. All are hammer forged from high-grade tool steel, individually fitted, tempered, adjusted and tested—made by plier specialists with a reputation for quality "since 1857."

LONG NOSE PLIER
307-5-½L—Extremely slim pattern ideal for the really tight spots. Jaws are knurled to insure a positive grip.



OBLIQUE CUTTING PLIER — 210-5L — For cutting small wires or trimming plastic. Entire length of cutting knives works flush against cutting surface. 5 or 6-inch sizes.

CHAIN NOSE PLIER
317-5L—A full inch smaller than standard pattern. Has a very fine knurl that will not damage soft wire. Also available without knurl.

LIGHTWEIGHT OBLIQUE CUTTING PLIER 209-5—Smaller than 210-5L with an extremely narrow head. Entire length of cutting knives works flush against cutting surface.

TRANSVERSE END CUTTING PLIER
204-6—Useful in precision work where ordinary oblique or end cutters are too bulky. Gives a clean, flush cut.

DUCK BILL PLIER
306-5-½—This compact plier has jaws of sufficient width to hold small springs, yet small enough to form wire in confined places.

This Klein Pocket Tool Guide gives full information on all types and sizes of Klein Pliers. A copy will be sent without obligation.

ASK YOUR SUPPLIER

Foreign Distributor: International Standard Electric Corp., New York

"Since 1857"

Mathias KLEIN & Sons
Established 1857
Chicago, Ill., U.S.A.
3200 BELMONT AVENUE, CHICAGO 18, ILLINOIS

TRANSMISSION LINES FOR AM-FM-TV-M... ANTENNAS
ANTENNA EQUIPMENT • ANTENNA TUN...

Andrew's vast experience
produces the most advanced

Request Andrew Nomographs in Bulletin 81 for direct graphical computation of efficiency of 10 to 2000 foot runs of line.

Andrew
CORPORATION
363 EAST 75TH STREET, CHICAGO 19
ANTENNA SPECIALISTS

ANDREW Type Number	Size	Impedance	Insulator Bead Material
	TRANSMISSION LINE FOR VHF-TV		
451	1⅝"	51.5 ohms	steatite
551-4	1⅝"	51.5 ohms	Teflon*
452	3⅛"	51.5 ohms	steatite
552-1	3⅛"	51.5 ohms	Teflon*
T-453	6⅛"	51.5 ohms	steatite
	TRANSMISSION LINE FOR UHF-TV		
561	1⅝"	50.0 ohms	Teflon*
562	3⅛"	50.0 ohms	Teflon*
563	6⅛"	75.0 ohms	Teflon*
	WAVEGUIDE FOR UHF-TV		
M-14710	Aluminum 7½" x 15" rectangular cross-section, RTMA designation WR-1500, 12 foot section		
M-14715	Aluminum waveguide WR-1150, 11½" x 5¾" inside dimensions, 12 foot section		

*trademark for DuPont tetrafluoroethylene

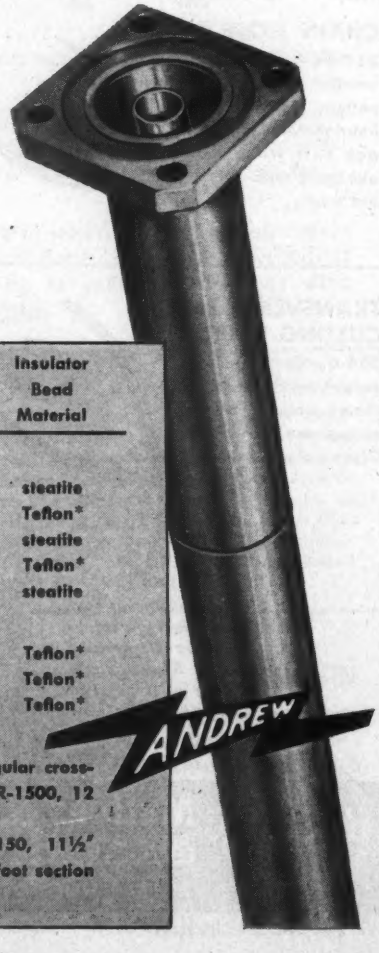

contrast ratio as a single criterion and plot a series of empirical curves as shown in Fig. 8. In this figure, perception time in seconds is plotted as a function of contrast ratio. The figures on the curves 1, 2, 4, etc. indicate the distance in inches between the spot where the operator is concentrating his attention and the spot where the pip appears. In the extreme case this distance is the display size. It will be noted that perception time, at low contrast ratios, increases very rapidly as the display size increases. Since perception time, in itself, is difficult to measure, the perception times of Fig. 8 also contain an average reaction time of 400 milliseconds.

The relative ability of the observer to see pips of various sizes was investigated and it was found that, at viewing distances of 14 in. and at constant brightness, pip size in the range 0.06 to 0.50 in. had no appreciable effect on seeing time or the ability to see. This situation held for viewing distances of 14 in. or less, whereas at viewing distances greater than 20 in. the optical "visual angle" effect became prominent.

Using the method of display evaluation described in this study, the brightness and perception time of several modern radar equipments was calculated and then measured. In all cases, for both search and track mode, the calculated results agreed with the measurements within a maximum error of 25% provided care was taken to obtain accurate radar system characteristics. Typical values for pip brightness were: in search mode—1.5FL; in track mode—9 FL. Since the radar systems used to check the formula had widely different characteristics, it is assumed that good results will be obtained on present and contemplated radar systems in general.

The work described in this paper was performed on Air Force Contract AF33 (038) 23309. The author wishes to express his appreciation to his colleague, H. S. Jackson, who was responsible for much of the subjective testing.

REFERENCES

1. Williams, Bartlett, and King, "Visibility on Cathode-Ray Tube Screens," *Journal of Psychology*, 1948, 25, pp. 455-466.
2. Luckiesh, Matthew, *Light Vision and Seeing*, D. Van Nostrand Co., Inc., 1944.
3. Baumgardt, *Review Optique*, 28, 661 (1941).
4. Long, George E., "The Effect of Duration of Onset and Cessation of Light Flash on Intensity Time Relation in the Peripheral Retina," *Journal of the Optical Society of America*, vol. 41, no. 11, Nov. 1951, Project NR-142-404, Contract 10, 60NR-271, Task IX.
5. Soller, Starr, and Valley, *Cathode-Ray Tube Displays*, Radiation Laboratory Series, McGraw-Hill Book Co., 1948.
6. Jackson, H. S., "Investigation of the Effect on Seeing Time of Brightness, Pip Spacing and Noise on CRT Displays," Contract AF33(038) 23309.

This paper was first presented at the National Electronics Conference held in Chicago, Sept. 29-Oct. 1, 1952.

Transistor Oscillator

(*Continued from page* 93)

Determinations of the frequency stability with changes in temperature and supply voltage have indicated that the frequency varies approximately 1 part in 10^8 per degree C, and 1 part in 10^8 per 0.10 volt. The transistor oscillator was also compared with the standard oscillators controlling the transmissions of WWV. Short time variations were about $\pm$ 3 parts in 10^{10} and the long interval drift—in days—indicated changes of about 3 parts in 10^9 per 24 hours. These figures are comparable to those obtained from vacuum tube standard oscillators, particularly at the time of their initial installation. Fortunately, frequency drift in the quartz-crystal unit of a conventional type standard oscillator normally decreases with age. It should also be noted that because the transistor oscillator has just recently been developed, no data exist in regard to long-time stability in terms of years.

The compactness of the transistor oscillator lends itself to more convenient and portable temperature control measures. Heretofore standard quartz oscillators or quartz clocks have required relatively complex temperature control apparatus (operating at temperatures up to 60°C) and special high-reliability power sources.

Tests were conducted on the new transistor oscillator with the complete unit operating at 0°C. Reasonable temperature stability was achieved by merely placing the oscillator in a Dewar flask containing crushed clear ice. Among the results was an indication that the reduced temperatures were responsible for reducing drift and increasing the Q of the quartz crystal unit. Thus, it now becomes possible to make available a readily-portable continuously-oscillating frequency standard.

[1] High stability quartz crystal unit for frequency standards, J. P. Griffin, *Bell Lab. Record 30*, No. 11 (1952).

New NARTB Seal

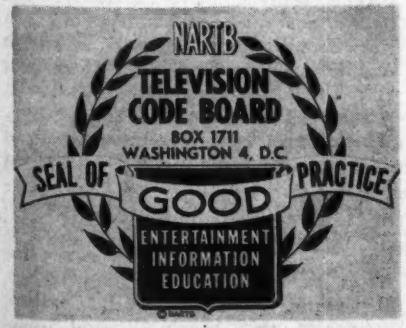

New NARTB Seal of Good Television Practice contains address of Television Code Board to enable viewers to write in comments on those programs they consider objectionable.

CANNON PLUGS *to* **ARMY ORDNANCE** *specification*

See Cannon Electric Booth #2-512 Radio Engineering Show. March 23 to 26. Grand Central Palace N. Y.

AO Cannon Type AO Series connectors are manufactured under the latest specification pertaining to electrical systems for military vehicles and associated external electrical equipment. "AO" connectors will mate with standard "AN" fittings. Are ideal for heavy duty industrial use.

This new series is designed to withstand extreme conditions of temperature, moisture, dust, vibration and shock. Shell material is aluminum alloy with natural iridite finish. Insulators are of a special molded resilient material having high dielectric strength, medium oil resistance and will not support combustion. Resilient grommet provides moisture proofing over solder terminals.

For engineering data, request Bulletin AO-1952.

SOCKET INSERT ASSEMBLY TYPE AO-RA00 WITH GROMMET RETAINING NUT

TYPE AO-PA06 WITH GROMMET RETAINING NUT

SOCKET INSERT ASSEMBLY TYPE AO-RB02

PIN INSERT ASSEMBLY TYPE AO-RB02

AO TRAILER RECEPTACLE

DUST CAP

AO SLAVE RECEPTACLE

TYPE AO-22 ANGLE 90° ELBOW

WRITE FOR BULLETIN AO-1952

CANNON ELECTRIC

Since 1915

Factories in Los Angeles, Toronto, New Haven, Benton Harbor. Representatives in principal cities. Address inquiries to Cannon Electric Company, Dept. C-201, P. O. Box 75, Lincoln Heights Station, Los Angeles 31, Calif.

BERKELEY announces

another "First"...
a direct reading digital
0-42 megacycle
frequency meter
MODEL 5570

✱ Accuracy: 1 part in 10^7, ±1 count

✱ Direct-reading digital indication

✱ A complete instrument in one package.

Wide Application...transmitter frequency monitoring, crystal checking, general laboratory and production line use wherever rapid, precise frequency determination is desired.

On Display at the IRE Show, New York
March 23-26—Booths 302 and 304, Fourth Floor

M-6

Berkeley Scientific
division of BECKMAN INSTRUMENTS INC.
2200 WRIGHT AVENUE • RICHMOND, CALIFORNIA
"DIRECT READING DIGITAL PRESENTATION OF INFORMATION"

News of MANUFACTURERS' REPS

I. R. Ross, president of Credda, Inc., national distributors of electronic and aeronautical equipment, has formed a new company, Ross Associates, 19 W. 26 Street, New York, N. Y., which is representing manufacturers of electronic equipment nationally.

Staver Co., Inc., Bay Shore, L. I., N. Y., manufacturer of tube shields and other electronic components, has announced the appointment of The Frank A. Emmet Co., 2837 W. Pico Boulevard, Los Angeles, Calif. as the company's west coast rep.

Helipot Corp., South Pasadena, Calif., has appointed J. S. Root, 290 Lawrence Ave. West, Toronto 12, Ont., Canada, as its factory representative for the Dominion. Bivens and Caldwell, Security Bank Building, High Point, N. C., has also been appointed Helipot representative for Tennessee, North and South Carolina, Kentucky, Georgia and Alabama.

Bittan-Shafer Sales Co., manufacturers' representatives of electronic parts, television and radio has been formed by Harry Bittan and Peter Shafer with offices and showroom at 120 Liberty St., New York, N. Y. Sales activities will cover the metropolitan New York and northern New Jersey area.

Dan J. Connor Co. is now occupying new and larger offices at 1346 Suburban Station Building, Philadelphia 3, Pa.

Ram Electronics Sales Co., producer of test-pattern tested flybacks, deflection yokes, width and linearity coils, and other components for television, has announced the appointment of Stan Cluphf & Assoc., 4265 Santa Fe Drive, Littleton, Col., as sales reps for the territory of Colorado, Utah, Wyoming, Montana, New Mexico.

Pinkney & Hine, 522 Plymouth Building, Minneapolis, Minn., is the new selling agency for technical products of Allen B. DuMont Laboratories, Inc. in North and South Dakota, Minnesota, Northern Wisconsin and the Michigan Peninsula area.

Harold A. Moyer, formerly assistant sales manager of the Astatic Corp., has announced his entry into the manufacturer's representative field. He will handle several accounts from the late Ray Schottenberg and will cover the middle Atlantic area. Present address is P. O. Box 14, Haddonfield, N. J.

Samuel C. Hooker, 397 Highland Ave., Winchester, Mass., has been appointed sales representative in the New England States for the Hammarlund Manufacturing Co., Inc., of New York City.

Stanley K. Wallace Sales Agency of Lutz, Fla., whose activities cover the states of Alabama, Florida, Georgia, Mississippi, North & South Carolina, Tennessee and Virginia, have relinquished all automotive lines. Henceforth, all sales activities will be concentrated on electronic lines.

Crosstalk

(*Continued from page* 81)

sible to include some unbalanced circuits in the system, provided the level is not too high, although this is always a rather dangerous practice. The main unbalanced circuits in the C.B.C. installation were firstly the main switching system itself, which was equipped with repeating coils on both inputs and outputs so that the area of unbalance could be strictly localized, and secondly, the cueing system in which the unbalanced circuits made the trip down to the distribution frame and back without apparently causing any trouble, but this must be regarded

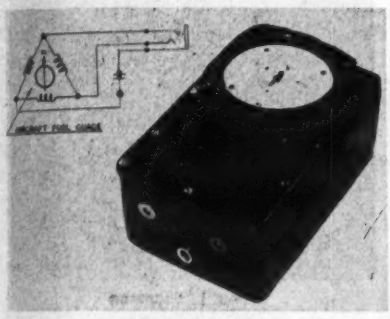

Fig. 5: The "Whiffledink" is a differential ohmmeter for detecting grounded conductors

more as good luck than good management. In all cases where unbalanced circuits are used, considerable care must be taken in laying out the common ground in order to reduce to a minimum the area of any loops formed. In general, the program and ground leads should be be carried along together wherever possible.

Of the 180 amplifiers in the Master Control Equipment, all but five have bridging inputs, with impedances in the range between 15000 and 20000 ohms. At first, this was attained by the use of series resistors in each leg of the input circuit, feeding a 5000 ohm winding on the input transformer. As this winding was neither center tapped nor shielded, this arrangement caused a great deal of trouble, which was not cured until the wiring had been changed to provide a 20,000 ohm winding, without any series resistors. Another possible source of crosstalk in installations which include several amplifiers is magnetic pickup from the output transformer of one amplifier to the input transformer of another. This can be avoided either by adequate magnetic shielding, or by the adoption of humbucking construction or both.

To conclude this brief survey of ways of avoiding crosstalk, we may indicate the results which were

(*Continued on page* 167)

NOW



..Wire Lead Micas with 500 times better moisture resistance than ever before!



Sangamo HUMIDITITE* Mica Capacitors

When you use Sangamo HUMIDITITE molded Mica Capacitors, you gain all the advantages of an amazing moisture seal that offers previously unheard-of moisture resistance characteristics for compression molded plastic-encased mica capacitor components.



***what is HUMIDITITE?**

Humiditite is a remarkable new plastic molding compound, developed by Sangamo, that gives Sangamo Mica Capacitors moisture resistance properties far superior to any others on the market.

HERE'S THE PROOF . . . The standard moisture resistance test described in MIL-C-5A (proposed) Specification requires mica capacitors to offer at least 100 megohms of insulation resistance after ten 24 hour cycles in a humidity chamber at 90% to 95% relative humidity. The best competitive micas barely meet this requirement . . . but Sangamo HUMIDITITE Micas, *under the same conditions*, all tested in excess of 50,000 megohms! Continued tests, over and above requirements, with the same HUMIDITITE Micas, proved them capable of withstanding from 21 to 52 cycles (from the smallest sizes to the largest) before failure.

Humiditite is just another example of the advanced engineering that enables Sangamo to meet the existing and future needs of the electronic industry. For additional information about HUMIDITITE, write for Engineering Bulletin No. TS-111.

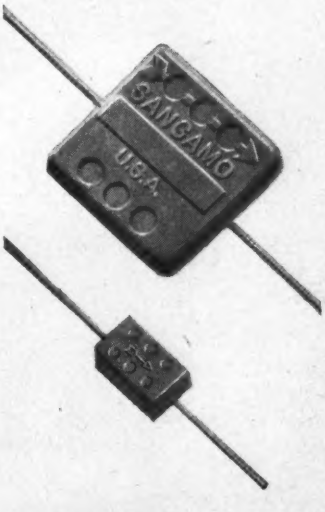

Those who know... SANGAMO *choose Sangamo*

SANGAMO ELECTRIC COMPANY

MARION, ILLINOIS

SC53-5

we don't shrink heads...

but we do shrink

transformers!

If you think Jivaro Indians were experts at shrinking things . . . (human heads, that is) . . . look what STANCOR engineers have done with transistor transformers! Recently they designed and are now producing the smallest transformer ever built!

How big is this new transformer? Well, it's just ¼" x ⅜" x ⅜" and it weighs only 0.07 ounce. Designed especially for transistor applications, this unit is no larger than the transistor it powers.

It is one of a series of transistor transformers, being built by Stancor, for development and commercial applications. If you are planning to use transistors, take advantage of Stancor's knowledge of engineering and manufacturing of ultra-miniature transformers.

STANCOR TRANSISTOR TRANSFORMERS

These stock transistor transformers are available through your Stancor distributor:

TYPE	APPLICATION	PRI. IMP.	SEC. IMP.
UM-110	Interstage	20,000	1,000
UM-111	Output or matching	1,000	60
UM-112	High imp. mic. to emitter	200,000	1,000

Other transistor transformers, built to your special requirements, are available for original equipment production only. Write for Bulletin 462.

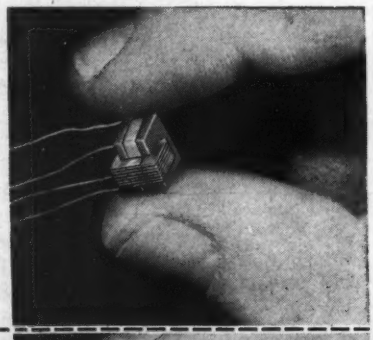

STANCOR TINYTRANS

Miniature, cased audio transformers

Here are four new cataloged high fidelity transformers for use where space is at a premium. These units have a frequency response of ±1 db, 30–20,000 cps. They are impregnated and sealed in a ⅜" square, drawn aluminum can, with ⅛" terminals mounted on a phenolic terminal board. Total height is 1¼".

TYPE	APPLICATION	PRI. IMP.	SEC. IMP.
TT-11	Mic., pickup or line to single grid.	50, 200/250, 500/600	50,000
TT-12	Mic., pickup or line to push-pull grids.	50, 200/250, 500/600	50,000
TT-13	Dynamic mic., to single grid.	7.5/30	50,000
TT-14	Single plate to single grid.	15,000	60,000

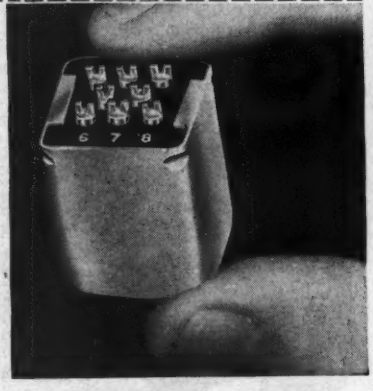

Ask your Stancor Distributor for Bulletin 463 on Stancor Tinytrans, or write us for your free copy.

STANCOR

STANDARD TRANSFORMER CORPORATION

3572 ELSTON AVENUE • CHICAGO 18, ILLINOIS

EXPORT SALES: Roburn Agencies, Inc., 39 Warren Street, New York 7, N. Y.

PERSONAL

Leslie Norde has joined the Hammarlund Manufacturing Co., Inc. of New York City as chief receiver engineer. He was formerly senior project engineer at Northern Radio Corp.

Arthur L. Chapman has assumed the newly-created post of vice president in charge of electronics operations of

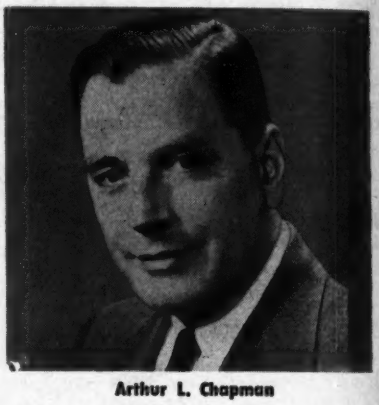

Arthur L. Chapman

Sylvania Electric Products, Inc. He will be responsible for the operations of Sylvania's radio and television, parts, electronics, radio tube and television picture tube divisions.

Terrell W. "Tex" Kirksey has been named chief engineer of KDUB-TV, new DuMont equipped station in Lubbock, Texas. He was formerly a sales engineering consultant for Allen B. Du Mont Laboratories, Inc. in the Southwest.

Henry F. McKenney has been named chief engineer of the Ford Instrument Co., division of the Sperry Corp. Formerly he specialized in airborne equipment and holds four patents with eight more pending on magnetic amplifiers, servomechanisms and electronic equipment.

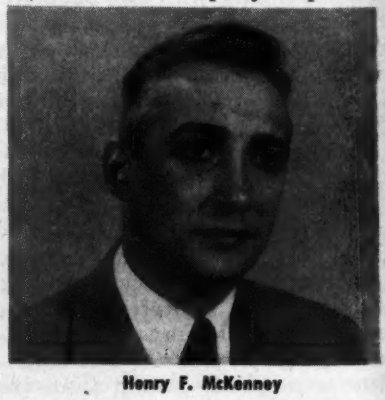

Henry F. McKenney

John Silver, general manager of Motorola's communications and electronics division, has been named vice-president in charge of operations, communications and electronics division. He

came to Motorola in 1944 and was appointed general manager of communications and electronics in 1949. Prior affiliations included 12 years in engineering with Crosley Radio Corp., and several years as chief production engineer for Collins Radio Co., Cedar Rapids, Iowa.

Henry Fogel, formerly manager of commercial products division for the Radio Receptor Co., Inc., has been appointed president of Granco Products, Inc., 36-17 20th Ave., Long Island City 5, N. Y. The company was recently organized for the design, manufacture and distribution of converters for ultra high frequency television reception and UHF measuring instruments.

R. W. Clark who has been appointed director of engineering for KONA-TV at Honolulu, has been associated with NBC radio and television networks for the past 22 years. In 1945, he was TV operations supervisor for NBC in New York. In 1948, he was transferred to Hollywood to become manager of NBC's television technical operations and to put KNBH television on the air.

Leonard A. Rooney has been appointed manager of communication equipment sales of Raytheon Manu-

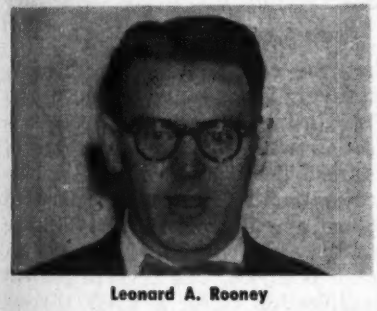

Leonard A. Rooney

facturing Co., Waltham, Mass. He will be responsible for all sales of Raytheon communication and television microwave link equipment.

Matthew T. Lebenbaum has been appointed supervisor of the newly formed applied electronics section in the research and engineering division of Airborne Instruments Laboratory, Inc., Mineola, L. I., N. Y. Peter D. Strum has been appointed assistant supervising engineer of the new section.

L. E. Ashman has been elected president and a director of Air Associates, Inc., 25-year old firm manufacturing aircraft parts and special purpose electronic equipment. Previously, he was executive vice president of the Rockwell Mfg. Co.

William A. Damerel has been appointed vice president of La Pointe Electronics Inc. **Milby M. Hancock,** formerly general manager of the concern, has been elevated to the position of assistant to the president.

Robert J. Rorden has been appointed chief engineer for Gertsch products, Inc., Los Angeles. Previous affiliations were with Point Mugu government projects and Dalmo Victor Co., San Carlos.

TUBE SOCKET "Firsts"

Among recent additions to the METHODE line are a number of innovations and improvements whose worth has been quickly recognized by electronic designers and producers.

The following are a few of the new accessories which have already found high production applications.



"Twist-on" Tube Shield Bases

"Twist-On" type of tube shield and base, which can be mounted separately or in combination with molded sockets, as illustrated. Projecting lugs on shields provide *direct ground* to chassis under screw pressure and a reliable shock and vibration proof mount.



Tube Socket for Printed Circuits

Miniature, octal and noval units with simple, time-proven design features providing reinforced mechanical *spring contact with printed conductors*, easily supplemented by solder dip operations. Insulators are heat resistant black phenolic and hardware is cadmium plated copper base alloy. Available with or without tube shield terminals, ground straps, and jumper bars.



Laminated Miniature Tube Sockets

With softer alloy tube pins resulting from material conservation measures, the *wiping* action of METHODE laminated miniature socket contacts provides uniform withdrawal of tubes without breakage, stress or damage to pins . . . .

Industry may look to METHODE for further electro-mechanical developments to assist in meeting the problems of increased complexity of new radio, television and communications equipment. Consultation is invited on wiring device applications which involve large production requirements or will meet an industry-wide need.

METHODE Manufacturing Corp.
2021 West Churchill Street • Chicago 47, Illinois

District Sales Offices:

Indiana, Ohio, Michigan
V. C. Macnabb Indianapolis
R. L. Colfax Fort Wayne
California, Arizona
W. S. Harmon Los Angeles
New York State
M. P. Andrews Fayetteville (Syracuse)
Pennsylvania, Southern New Jersey
D. T. Cooper Glenside (Philadelphia)
New York City, Northern New Jersey
G. A. Boeck Mountain Lakes, N. J.
Texas, Oklahoma
E. F. Aymond Co. Dallas Tulsa
New England
Garber Sales Co. Boston New Haven
Washington, Maryland, Virginia
J. W. Whitfield Washington, D. C.
Canada
Kelly-Heenan Co. Toronto
Overseas Export
Sylvan Ginsbury
8 West 40th Street, New York, N. Y.

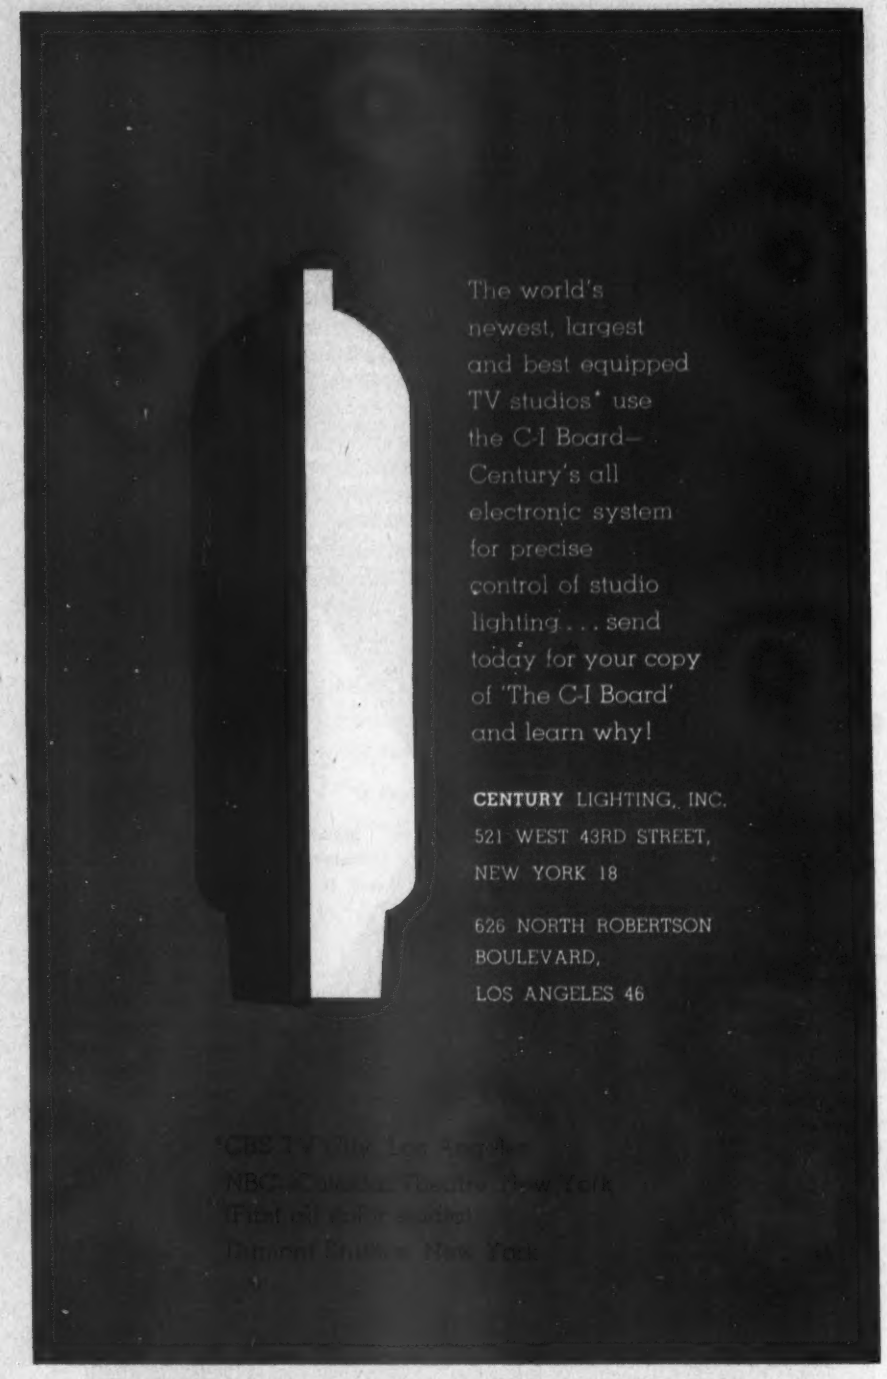
The world's newest, largest and best equipped TV studios* use the C-I Board— Century's all electronic system for precise control of studio lighting . . . send today for your copy of 'The C-I Board' and learn why!
CENTURY LIGHTING, INC.
521 WEST 43RD STREET, NEW YORK 18
626 NORTH ROBERTSON BOULEVARD, LOS ANGELES 46

See Us at the Radio Engineering Show, Booth 4-613 Components Avenue

TELE-TECH

CLOSING DATES

25th of second month preceding date of issue, for all ads requiring proofs, composition, foundry work, key changes, etc.

1st of preceding month for complete plates only—no setting.

20th of preceding month—Publication Date.

Cancellations not accepted after 1st of preceding month.

Caldwell-Clements, Inc., 480 LEXINGTON AVENUE, NEW YORK 17

Junction Transistors

(*Continued from page 99*)

each millampere of emitter current provides 23 ma/volt of control. It is apparent that careful stabilization of the operating point is required in order to utilize the transistor capabilities. For comparison, vacuum tubes have a theoretical transconductance-to-cathode current ratio of 11.6 although in practice this ratio is generally smaller than 1.

The manner in which the transconductance of the transistor varies with base-to-emitter voltage is shown in Fig. 7 which may be compared mentally with vacuum-tube transconductance curves. It is seen

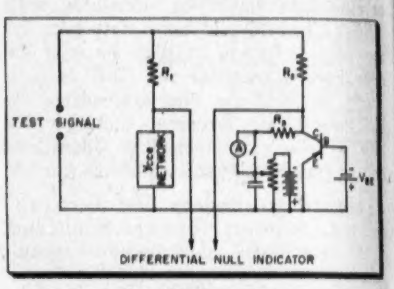

Fig. 9: Output admittance bridge test set

that the transconductance has attractively large values. Returning to Fig. 6, a few other quantities in connection with this transistor are of interest. The forward current amplification factor is −43.6; the forward voltage amplification factor is −2,520; and the forward power amplification factor is 27,600. The reverse current amplification factor is 0.085, the reverse voltage amplification factor is 1.48×10^{-3}, and the reverse power amplification factor is 31.4×10^{-6}. As a matter of interest in so far as the application of this transistor is concerned, if both input and output are matched for maximum power amplification, the input resistance is 438 ohms and the output resistance is 25,300 ohms. The maximum forward power amplification is 40 db.

Medium-Frequencies

As indicated before, the reactive effects of a junction transistor become significant at medium frequencies. It is therefore important to measure the admittance parameters as a function of frequency. This can be done by means of bridge circuits in which both real and reactive components are balanced and measured. For laboratory purposes, it has been convenient to build four separate bridges rather than to build one equipment as was the case for the General Radio Co. vacuum-tube bridge. The general arrangement for the y_{bbe} admittance bridge is shown

in Fig. 8. It is seen that this is a conventional bridge arrangement with an unbalanced signal source and a balanced null indicator. R_1 and R_2 need not be equal, but it is generally convenient to make them identical in which case the values of the y_{bbe} network elements will be the same as the transistor values. R_3 can generally be chosen large enough so that it has negligible effect on the bridge measurement. If desired, it too can be balanced out by connecting an identical resistor in the y_{bbe} network. The y_{cce} admittance bridge is similar to the y_{bbe} admittance bridge and is shown in Fig. 9. The same comments made concerning the y_{bbe} admittance bridge apply for the y_{cce} admittance bridge.

The y_{cbe} admittance bridge shown in Fig. 10, since it measures transfer admittance rather than self admittance, is somewhat different from the preceding two bridges. In the y_{ebe} admittance bridge, a test signal is introduced between the base and emitter of the transistor. This signal gives rise to a collector current which produces a signal across R_1. Since there is a phase reversal through the transistor, the signal across R_1 can be balanced out by introducing a current directly from the test signal through a suitably

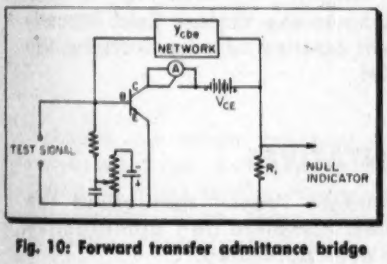

Fig. 10: Forward transfer admittance bridge

y_{cbe} network. The y_{cbe} network is adjusted until no signal appears across R_1 at which time the collector is short-circuited and y_{cbe} is given by the value of the y_{cbe} network elements. The y_{bce} admittance bridge shown in Fig. 11 is similar to the y_{cbe} admittance bridge. The main difference is that the short-circuited base current is in-phase with the collector-to-emitter voltage so that an accurately balanced test signal is required in order to operate the bridge.

The bridge admittance networks can consist of a resistive and a reactive element for point-by-point measurements. It is sometimes possible to have the admittance network approximately duplicate the transistor admittance in which event, the admittance network is a correct representation over a large frequency range. For this type of meas-

(*Continued on page 157*)

THERE'S A magnecorder FOR EVERY *Communications Monitoring* NEED

1-, 2-, and now 4-channel Magnecorder

ONE-CHANNEL MAGNECORDER—long accepted as the standard professional tape recorder in the communications and broadcast fields. Conversion kits quickly adapt your equipment for all special purposes.

ONE-CHANNEL PORTABLE—the new VOYAGER, a one-case truly portable recorder of professional quality. A standard PT6-AH Magnecorder is mounted back-to-back with line level amplifier which swings forward for instant use. Unsurpassed for remotes or field tests. Lightweight, rugged, reliable.

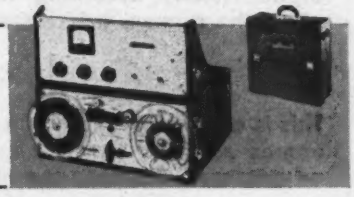



TWO CHANNELS—The acclaimed new Binaural Magnecorder provides either two-channel monitoring or brilliantly realistic 3-dimensional sound on one tape. Two simultaneous tracks accurately reproduce separate sounds or can provide stereo depth and direction, permitting one sound to be identified among many. The versatile dual channels can also be used for separate two-channel communications monitoring.



FOUR CHANNELS—The first *automatic* continuous recorder that monitors up to four channels at once on a standard ¼" tape. Originally engineered and JANized for the CAA, it is adaptable for utilities and carriers, fire and police calls, airports and civil defense.

Visit us at the I. R. E. Show Audio-Theatres, 301-303.

Magnecord INC.

225 West Ohio Street, Dept. TT3 • Chicago 10, Illinois

Constantly in Use . . .

the 1953

ELECTRONIC INDUSTRIES

. . . *the* Directory for the engineers who annually spec

Here's Why the 1953 ELECTRONIC INDUSTRIES DIRECTORY is Constantly in Use—

• COMPLETE PRODUCT LISTINGS

More than 1,900 different types of electronic and allied products are listed . . . so you can find who makes the product you need—*instantly*. No other directory lists so *many* products. No other directory lists them in a way you can use so *fast*.

• EXTENSIVE TRADE NAME LISTINGS

Contains *thousands of trade names* of electronic and allied products—*the most comprehensive trade name lists ever compiled in this industry*. Makes it as easy as A-B-C to find the manufacturer when you know only the trade name.

• UP-TO-DATE LIST OF MANUFACTURERS

Lists *thousands of manufacturers* in the electronic and allied industries—about *a thousand more than in the next best directory listing*. A great many manufacturers are listed for the *first time in any directory*—thanks to the tireless field investigations and constant scrutiny of new firms by the editors of TELE-TECH.

• EXCLUSIVE LIST OF ELECTRONIC REPRESENTATIVES

This is the *only list* in any directory devoted exclusively to electronic representatives. Arranged alphabetically according to states and cities, it gives the names, addresses, and telephone numbers of *all* independent "reps" throughout the country. It is the *most complete and authoritative* representatives list ever published.

• GEOGRAPHICAL LIST OF DISTRIBUTORS

This is a *complete* interfiling of distributors—giving names of firms and their owners or managers, addresses, telephone numbers, and *types and products handled*. This complete and accurate list of electronic distributors is arranged alphabetically under states and cities.

• EXCLUSIVE LIST OF CONSULTING ENGINEERS

The 1953 ELECTRONIC INDUSTRIES DIRECTORY is the *only* directory in the field publishing a list composed exclusively of consulting engineers *specializing in the many electronic fields*. Of the hundreds of thousands of engineers in America, these are the men you would call in to help you with your engineering problems. Names, addresses, and telephone numbers are given.

• EXCLUSIVE LIST OF ENGINEERING SOCIETIES

This is the *first time* that the names, addresses —*and* the names of the presidents and secretaries —of all the engineering societies in the electronic and allied industries, have been gathered in one place. Now, when you want a technical paper or information from a society, you don't have to engage in a long, laborious hunt to find the officers' names and addresses—it's all at your fingertips.

CALDWELL-CLEMENTS Inc. 480 Lexington Avenue, New York 17, N. Y.

Because It's Constantly Useful

DIRECTORY

a section of the regular June, 1953 issue of TELE-TECH

more than $5,000,000,000 worth of electronic equipment

Here's Why the 1953 ELECTRONIC INDUSTRIES DIRECTORY Is Constantly Selling for YOU . . .

THE MANUFACTURER

Because the 1953 *Electronic Industries Directory* lists *more* products, *more* trade names, *more* manufacturers . . . because it's far and away the *most complete, accurate, and up-to-the-minute* Directory ever compiled . . . and because it's so *simple and fast to use*—this Directory is *the* reference book of the field.

The 1953 *Electronic Industries Directory* is constantly used by the men whose responsibility it is to specify products like yours. And it is these men—the 21,000 top electronic engineer in the nation—who receive the Directory issue of TELE-TECH, just as they receive every issue of TELE-TECH each month.

So, your advertisement in the Directory issue of TELE-TECH gets to the right people at the right moment—to the men who *can* buy, just when they *are* buying. Reserve your space *now* for *year-round* sales!

THE REPRESENTATIVE

Because no other directory lists manufacturers' representatives exclusively, this is the Directory that's a must to the manufacturer seeking representation. With competition for the *right* line growing increasingly severe, your advertisement in the 1953 *Electronic Industries Directory* can tip the balance in *your* favor. Take advantage of this unique marketplace for your services. *Reserve space today!*

THE DISTRIBUTOR

Because this geographical listing of distributors can't be beat by any other directory, manufacturers and dealers will constantly use these pages for distributor information. Your advertisement will promote your lines . . . bring in new accounts and customers . . . tell manufacturers about your facilities . . . increase your profits. Be sure that you're "*in*" the 1953 *Electronic Industries Directory* by getting your space reservation in *now!*

THE CONSULTING ENGINEER

There's just no other source in this field that lists consulting electronic engineers—and consulting electronic engineers alone. The manufacturer who needs a consulting engineer uses these pages to make his selection. You can help *him* select *you* with your advertisement that helps introduce your services to your client . . . build your prestige. Sending us your reservation for space today!

PLUS . . . the shortest distance between the local representative and 21,000 buyers . . .

the new, exclusive

LOCALIZER INDEX

For the first time in a directory of this kind a manufacturer can list his local representatives, his branch and regional offices, and his executive and regional personnel—*right under his own alphabetical listing—right where 21,000 buying-minded engineers want to see it.* Minimizes long-distance telephone and telegraph charges . . . cuts correspondence . . . increases inquiries . . . speeds services . . . gets new orders, more orders. *Be sure your representatives are listed in the LOCALIZER INDEX!*

Rough Treatment FOR A CRYSTAL . . .

BOILED 5 minutes to prove hermetic seal

SHOCKED Thermal-shocked from −60° to +95°C in 70 seconds

SHAKEN Vibrated from 10 to 55 cycles per sec. Stress equivalent to 5G pull

That Kind of testing is just one of the reasons why

Midland CRYSTALS
DO A BETTER JOB FOR YOU

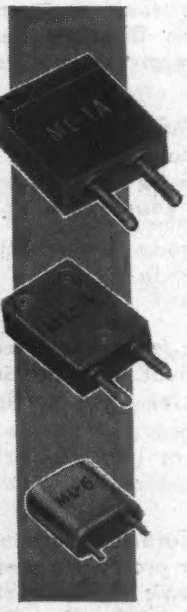

***TYPE ML-1A**
RANGE:
2.0—15.0 mc
Supplied per Mil type CR-1A when specified.

***TYPE ML-4**
RANGE:
1.0—10.0 mc
Supplied per Mil type CR-5; CR-6; CR-8; CR-10 when specified.

***TYPE ML-6**
RANGE:
1.4—75.0 mc
Supplied per Mil type CR-18; CR-19; CR-23; CR-27; CR-28; CR-32; CR-33; CR-35; CR-36 when specified.

Yes, we get tough with our Midland crystals. You expect best performance, and we make sure you get it when you use Midland crystals for all your frequency control needs. The final test pictured above is just one of many quality checks we make at every step of Midland processing.

Midland Quality Control starts with the raw quartz. Using optical viewing equipment of high accuracy, we select only the "cream of the crystal crop." Then, as the crystal proceeds through the various steps of cutting, slicing, lapping, etching, plating, and sealing, it is checked repeatedly to turn up any defect that might develop.

Stability, accuracy, high output, long life — name anything about a crystal that makes it a better performer for you, and we guarantee you'll get it in fullest measure with Midland.

WHATEVER YOUR CRYSTAL NEED— CONVENTIONAL OR SPECIALIZED...

When It Has To Be EXACTLY RIGHT...Contact

Midland
MANUFACTURING CO., INC.
3155 Fiberglas Road • Kansas City, Kansas

See Us at the Radio Engineering Show, Booth 4-613 Components Avenue

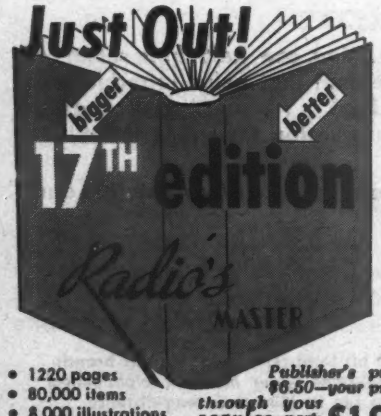

- 1220 pages
- 80,000 items
- 8,000 illustrations
- 8"x11"—5 lbs.

Publisher's price $6.50—your price through your regular parts distributor **$1.95**

The right part when you need it, for service

This permanent, hard cover Official Buying Guide of the electronic-TV parts and equipment industry with its comprehensive detailed index, eliminates the need for maintaining files of small catalogs and manufacturers' literature. RADIO'S MASTER catalogs 90% of TV and electronic equipment. Not merely part number listings—complete descriptions, specifications and illustrations written and compiled by each manufacturer. Enables you to make comparisons or substitutions right now!

UNITED CATALOG PUBLISHERS, INC.
110 Lafayette St., New York 13

Coming Events

See also "Stellar Events" on opposite page

March 10-11—SPI Annual Conference, Canadian Chapter, General Brock Hotel, Niagara Falls, Canada.

March 18-20—ASTE 21st Annual Meeting, Statler Hotel, Detroit, Mich.

March 19-20—NCIG Conference on Instrumentation, Michigan State College, E. Lansing, Mich.

March 23-26—IRE National Convention, Grand Central Palace & Waldorf-Astoria Hotel, New York, N. Y.

April 12-16—Electrochemical Society, International Meeting, New York, N. Y.

April 18—Cincinnati Section, IRE, Seventh Annual Spring Technical Conference, Cincinnati, Ohio.

April 20-22—MPA, 9th Annual Meeting, Cleveland, Ohio.

April 23-24—IRE Prof. Group on Circuit Theory, International Symposium on Nonlinear Circuit Analysis, Engineering Societies Bldg., New York, N. Y.

April 26-30—SMPTE 73rd Convention, Hotel Statler, Los Angeles, Calif.

April 28-May 1—7th Annual NARTB Broadcast Engineering Conference, Burdette Hall, Philharmonic Auditorium, Los Angeles, Calif.

April 29-May 1—Electronic Components Symposium, Shakespeare Club, Pasadena, Calif.

May 11-13—IRE, National Conference on Airborne Electronics, Dayton Biltmore Hotel, Dayton, Ohio.

May 18-21—Electronic Parts Show, Conrad Hilton Hotel, Chicago, Ill.

June 9-11—2nd International Aviation Trade Show, Hotel Statler, New York, N. Y.

Aug. 19-21—Western Electronic Show and Convention, San Francisco Municipal Auditorium, San Francisco, Calif.

Sept. 1-3—International Sight and Sound Exposition, Palmer House, Chicago, Ill.

Sept. 9-12—NEMA, Haddon Hall Hotel, Atlantic City, N. J.

Sept. 21-25—ISA 8th National Instrument Exhibit, Sherman Hotel, Chicago, Ill.

AES: Audio Engineering Society
AIEE: American Institute of Electrical Engineers
ASTE: American Society of Tool Engineers
IRE: Institute of Radio Engineers
ISA: Instrument Society of America
MPA: Metal Powder Assoc.
NARTB: National Association Radio and Television Broadcasters
NCIG: National Collegiate-Industry-Government
SMPTE: Soc. of Motion Picture and TV Engineers
SPI: Society of the Plastic Industry

New Special Effects Firm

A new firm for handling TV special effects equipment has been formed. Special Effects & Equipment, Inc., 418 W. 54 St., New York 19, N. Y., will provide products and services to stations, film producers and agencies. SEE formerly constituted the special effects division of Audio & Video Products Corp., but is presently not connected with that company.

Stellar Electronic Events Ahead

The striking graphic display on the front cover might well be called the Constellation of the Electronic Industries, for it represents the numerous organizations whose efforts chart the course of the industry and guide its future growth. As is explained on page one, the following list (tracing the stars on the cover from top to bottom) presents in detail the names, their contractions, and primary meetings scheduled for the stellar groups.

APCO—Associated Police Communication Officers—National Conference, Aug., 1953

PMA—Phonograph Manufacturers Assoc., Inc.—Annual Meeting, July 9, 1953

AES—Audio Engineering Society—5th Annual Convention & Audio Fair, Oct. 13-16, 1953, Hotel New Yorker, New York City

REPS—The Representatives — National Meeting, May, 1953, Conrad Hilton Hotel, Chicago

IAS—Institute of the Aeronautical Sciences, Summer Meeting, July 15-16, 1953, Los Angeles

ASA—American Standards Assoc. — National Meeting, Oct. 19-21, 1953 Waldorf-Astoria Hotel, New York City

ASTM—American Society for Testing Materials—Annual Meeting, June 27-July 3, 1953, Chalfonte-Haddon Hall, Atlantic City, N. J.

RIAA—Record Industry Assoc. of America—Annual Meeting, Feb. 1954

NEC—National Electronics Conference—9th National Conference, Sept. 28-30, 1953, Hotel Sherman, Chicago

RTMA—Radio and Television Manufacturers Assoc.—Annual Convention, June 15-18, 1953, Palmer House, Chicago

AFCA—Armed Forces Communications Assoc.—7th Annual Convention, May 14-16, 1953, Dayton, Ohio

IRE—Institute of Radio Engineers—National Convention and Show, March 23-26, 1953, Waldorf-Astoria Hotel and Grand Central Palace, New York City

ISA—Instrument Society of America—8th National Conference and Exhibit, Sept. 21-25, 1953, Hotel Sherman, Chicago

RCA—Radio Club of America—Annual Banquet, Dec. 1953

WCEMA—West Coast Electronic Manufacturers Assoc.—Western Electronic Show and Convention, Aug. 19-21, 1953, Municipal Acditorium, San Francisco

NEDA—National Electronic Distributors Assoc.—4th Annual Convention, Sept. 14-17, 1953, Chase Hotel, St. Louis, Mo.

NARTB—National Assoc. of Radio and Television Broadcasters—7th Annual Broadcasting Engineering Conference, April 28-May 1, 1953, Philharmonic Auditorium, Los Angeles

AIEE—American Institute of Electrical Engineers—Summer General Meeting, June 15-19, 1953, Atlantic City, N. J.

SMPTE—Society of Motion Picture and Television Engineers—73rd Convention, April 27-May 1, 1953, Hotel Statler, Los Angeles

AFCCE—Association of Federal Communications Consulting Engineers

ACM—Assoc. for Computing Machinery—Computer Conference, Dec. 1953

NAED—National Assoc. of Electrical Distributors—45th Annual Convention, May 24-28, 1953, Conrad Hilton Hotel, Chicago

NEMA—National Electrical Manufacturers Assoc.—National Convention, Nov. 9-12, 1953, Haddon Hall Hotel, Atlantic City, N. J.

NSPE—National Society of Professional Engineers—Annual Meeting, June 18-20, 1953, Shearton-Plaza Hotel, Daytona Beach, Fla.

ES—Electrochemical Society—International Meeting, April 12-16, 1953, Statler Hotel, New York City

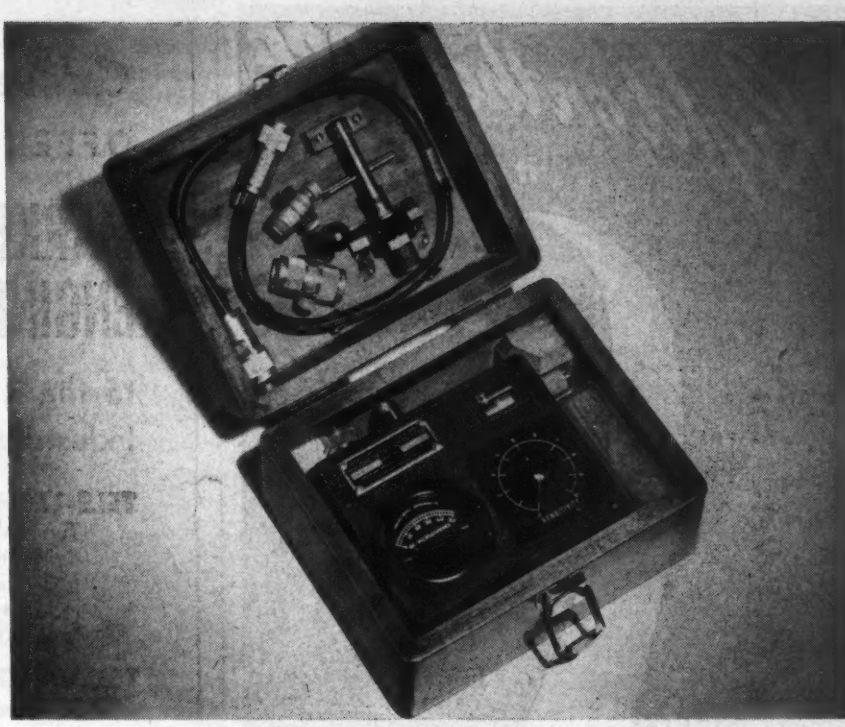

IF YOU USE MICROWAVES . . .

This self-contained, compact, versatile

WAVEMETER TEST SET*

can help you

Now, with one easy-to-carry instrument, you can determine the frequency of both pulsed and c-w microwave systems . . . you can make accurate measurements by both transmission and reaction methods. Because the new Wavemeter Test Set needs no external power source, it is ideal for field work—equally good for laboratory work! Its applicable range is from 2400 to 3400 megacycles. A low cost instrument—now in production, and used by U. S. Signal Corps as #TS-117/GP.

Write us today for bulletin giving complete technical data on the Wavemeter Test Set!

* *Licensed under Sperry Patents.*

ELECTRONICS DIVISION
AMERICAN ENCAUSTIC TILING COMPANY
909 Kenilworth Ave. Lansdale, Pa.

Cunningham
ESTABLISHED 1939
crossbar

For broadcast studio master control and monitor switching of audio and video circuits . . . intercoms . . . telegraph . . . computers . . . many other applications. Extreme flexibility. Fast and quiet switching with low crosstalk level. Any group of setups may be held intact while setting up others. Provision for spot or remote control.



Model 10X10

Connects any of ten circuits in horizontal plane to any of ten vertical.

For details of this truly superior switch, write

JAMES CUNNINGHAM, SON & CO., Inc. DEPT. T-1 ROCHESTER 8, NEW YORK

Right on the NOSE

it has to be!

The universal standard for frequency control . . . Eisenhour temperature compensated bi-metallic tuning forks are the acknowledged finest and most accurate controls on earth. Frequency ranges are available from 50cps through 10kc, tuned to ±.0015% as standard procedure. These champions of accuracy have temperature coefficient stability as high as one part per million per degree centigrade.

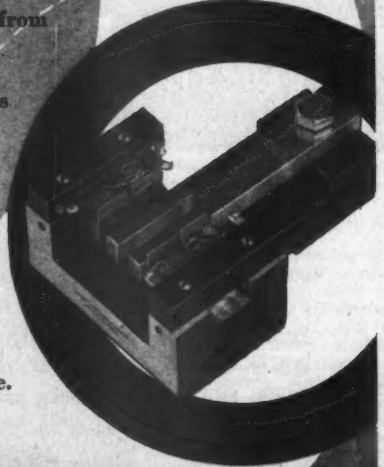

RIVERBANK LABORATORIES

DEPARTMENT OF ENGINEERING

GENEVA 1, ILLINOIS

Send name and title on company letterhead for catalog showing full line of forks and engineering data.

Caldwell-Clements, Inc.

OFFERS

MARKETING AND ENGINEERING SERVICES

to the Radio-Television-Electronic Industries

TELE-TECH

Top-ranking technical magazine in the 5-billion dollar radio, TV, communications, and electronic defense industries. Recognized for editorial excellence. Circulation now increased to 21,000.

TELEVISION RETAILING

The sales-and-service publication for the radio, television, appliance, and recording industries. Two new sections: "Mart" (for prices and specifications); "Technician" (for circuits, schematics).

ELECTRONIC INDUSTRIES DIRECTORY

Most complete, accurate, up-to-date directory in the electronic engineering field. New exclusive *Localizer Index* lists representatives' names, addresses, telephone numbers under manufacturers' alphabetical listing. Section of regular issue of *Tele-Tech*.

DISTRIBUTORS' DIRECTORY

Only directory of its kind with complete listing of all radio, TV, and appliance distributors. Annual section of regular January issue of *Television Retailing*.

REPRESENTATIVES' DIRECTORY

Only alphabetical and geographical directory of manufacturers' representatives selling electronic components and engineering equipment. Annual section of regular issues of *Television Retailing* and *Tele-Tech*.

MANUAL COMPANY

Special service to defense industries. Preparation of technical manuals, instruction books, parts lists, drafting, illustrating. Technically trained staff familiar with Army-Navy-Air Force policies and requirements.

DIRECT MAIL

Special mailing service for advertisers desiring to supplement or intensify their space advertising in *Tele-Tech*. Up-to-the-minute, personalized lists available in ten separate groups of the TV-electronic field.

CALDWELL-CLEMENTS, INC.

480 Lexington Avenue, New York 17, N. Y.

Phone: Plaza 9-7880

Junction Transistors

(*Continued from page* 151)

urement, it is convenient to have a square-wave or a swept-frequency test signal so that the correct balance can be easily ascertained.

If desired, bridges can be designed for the determination of the current and voltage amplification factors, but these bridges are not necessary since these quantities can be computed from the nodal admittance parameters.

After the four nodal admittances have been determined the performance of the transistor can be predicted at any frequency desired. In many publications, the frequency performance of the transistor has been cited in terms of the frequency characteristics of the current amplification factor. This is not a good index since as mentioned before, the voltage amplification factor is of equal importance. As a matter of fact, the frequency characteristics of α_{cb} will generally give a pessimistic aspect to the frequency performance of the transistor. On the other hand, the frequency characteristics of α_{ce} will give an overly optimistic aspect of the frequency performance of the transistor.

Power Amplification

The only real criterion of the frequency performance of a transistor is the variation of the power amplification. For maximum power amplification the conjugate admittance match equations are as shown in Table III. The important thing to note in these equations is that the

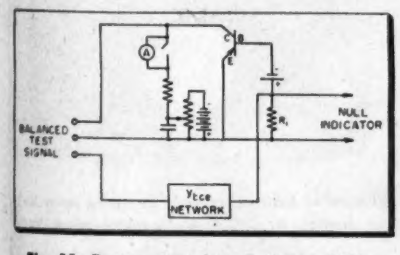

Fig. 11: Reverse transfer admittance bridge

forward power amplification is proportional to the forward power amplification factor. This factor can therefore be used to considerable advantage as a simple single index of the frequency performance of the transistor. The forward power amplification factor in turn is proportional to the square of the magnitude of the forward transfer admittance, y_{cbe}, so that this nodal parameter, the complex transconductance, will play an important part in establishing the performance of the transistor.

Although considerable attention has been focused upon transit-time effects in the junction transistor, at the moment, this is not the limiting factor in its frequency performance. It is relatively easy to construct junction transistors with sufficiently small base dimensions so that transit-time effects are not important up to several megacycles per second. In contrast, unless special precautions are taken, reactive effects in the junction transistor may be quite significant at several kilocycles per second.

By means of detailed measurements of the admittance parameters of junction transistors a clear picture of their operation can be obtained. In particular, these measurements point out the construction factors that now limit frequency performance. By this approach, junction transistors have been made at the RCA Laboratories with improved frequency performance. These improved junction transistors give significant power amplification to over 10 MC.

This paper presented at the National Electronics Conference held in Chicago, Sept. 29—Oct. 1, 1952.

[1] For additional details see L. J. Giacoletto, "Junction Transistor Equivalent Circuits and Vacuum Tube Analogy," *Proceedings of I.R.E.*, pp. 1490-1493 November, 1952. N.B. Figs. 1, 2, 3, 4, 6 and 7 are taken from this article.

[2] R. R. Law, C. W. Mueller, J. I. Pankove, and L. D. Armstrong, "A Developmental Germanium P-N-P Junction Transistors," *Proceedings of I.R.E.*, pp. 1352-1357, November, 1952.

DANGER! A BEACON LAMP JUST FAILED!
warns the new H. & P. Automatic Alarm System for Tower Lighting
H&P
AND THE WARNING GOES STRAIGHT TO CENTRAL CONTROL
NO. 4 BEACON OUT...

A PACKAGED UNIT—The inexpensive H. & P. system is packaged in a single streamlined housing, and is designed for easy installation and maintenance.

WHAT IT WILL DO—It triggers an alarm signal, via micro-wave, in the event of any light failures. It indicates location, and whether Beacon or obstruction lights (or both) have failed. Also signals power failures in the antenna lighting circuit. Write for complete information, and name of nearest distributor.

FCC REGULATIONS REQUIRE either a daily inspection of all tower lights—or the installation of a dependable automatic alarm system to signal light failures. FCC also requires the immediate reporting of all light failures. With stations in difficult terrain, a daily light inspection by personnel is costly. And full compliance is nearly impossible: 24 hours could elapse before discovering a light failure!

HUGHEY & PHILLIPS Automatic Alarm System pays for itself in a few months because personnel inspection costs are virtually eliminated. FCC compliance is assured because all light failures are immediately recorded at the control station.

HUGHEY & PHILLIPS
Tower Lighting Division
Encino, Calif.

LEADERSHIP IN THE FIELD OF TOWER LIGHTING EQUIPMENT

R. F. SIGNAL GEN. KIT $19.50
AUDIO GEN. KIT $29.50
5" SCOPE KIT $43.50
T.V. ALIGN. GEN. KIT $39.50
SIGNAL TRACER KIT $22.50
BUILD YOUR OWN
Heathkit
TEST EQUIPMENT
Heathkits are completely engineered instruments supplied unassembled. Every kit goes together smoothly and easily. All drilling, punching, and painting has already been done for you. All parts are furnished and are of highest quality.
Detailed construction manual shows clearly where each wire and part goes and tells exactly how to build the kit. Write for free catalog.
BATTERY ELIMINATOR KIT $24.50
VACUUM TUBE VOLTMETER KIT $24.50
HEATH COMPANY
BENTON HARBOR 24, MICHIGAN
EXPORT AGENT
ROCKE INTERNATIONAL CORP.
13 East 40th Street
NEW YORK CITY (16)
IMPEDANCE BRIDGE KIT $69.50
TUBE CHECKER KIT $29.50
CONDENSER CHECKER KIT $19.50
GRID DIP METER KIT $19.50

FREED

TRANSFORMERS

MILITARY COMPONENTS TO SPECIFICATIONS MIL-T-27 & ANE-19 AND COMMERCIAL TYPES

Pulse Transformers
Filter Reactors
Charging Reactors
Saturable Reactors
Toroid Inductors
Low Pass Filters
High Pass Filters
Band Pass Filters
Discriminators
Plate Transformers
Power Transformers
Filament Transformers
Vibrator Transformers
Input Transformers
Interstage Transformers
Driver Transformers
Output Transformers
Modulation Transformers
Blocking Oscillator Transformers
Band Elimination Filters

INSTRUMENTS

NO. 1020 B MEGOHMMETER DIRECT READING

Self-contained and A.C. operated with electronically regulated supply. 1 megohm to 2 million megohms.

NO. 1010 COMPARISON BRIDGE

Self-contained and A.C. operated. For rapid and accurate test of Resistors, Condensers and Inductors.

OTHER FREED INSTRUMENTS

NO. 1030	Low Frequency Q. Indicator
NO. 1110A	Incremental Inductance Bridge
NO. 1150	Universal Bridge
NO. 1170	D.C. Supply
NO. 1210	Null Detector and Vacuum Tube Voltmeter
NO. 1140	Null Detector Amplifier
NO. 1040	A.C.—V.T. Voltmeter
NO. 1250	Decade Condenser
NO. 1410 and	Harmonic Distortion Meter Decade Inductors

SEND FOR COMPLETE CATALOG DESCRIBING ALL FREED INSTRUMENTS AND TRANSFORMERS

FREED TRANSFORMER CO., INC.

1726 WEIRFIELD ST., BROOKLYN (RIDGEWOOD) 27, N. Y.

Hearing Aids Switch to Transistors

The hearing aid industry is turning to transistors to replace vacuum tubes. It is predicted that the aids will increase from 1,000,000 units now in use to several million because of the better performance and economy made possible with transistors. Most important, the "B" battery and excessive drain have been eliminated, bringing annual battery replacement cost from $40 down to $3. Tiny mercury batteries with 2000-hour life are selling for $0.65, or about 30 hours of operation for one cent. Other features include elimination of microphonics, increased gain (63 to 70 db at 1000 cps), small volume (3.3 cu. in.), light weight (2.8 to 3.75 oz.), high saturation output (122 to 138 db), and low distortion (under 2%). A representative unit, one made by E. A. Myers & Sons, sells for $285.

Photos (not to scale) show Sonotone aid (l), first to employ one transistor in circuit. E. A. Myers aid (r) uses three transistors. Parts are magnetic mike, receiver and their magnets

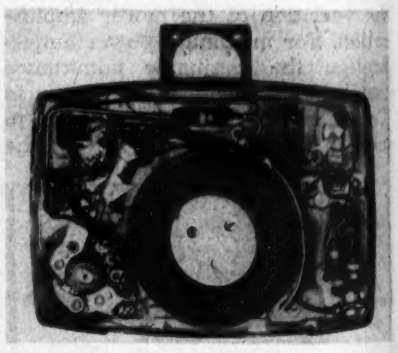

Top view of Maico aid shows partially open battery drawer. At center is magnetic microphone

Underside of Maico aid shows three Raytheon CK718 transistors; is 2.66 x 1.88 x 0.67 in.

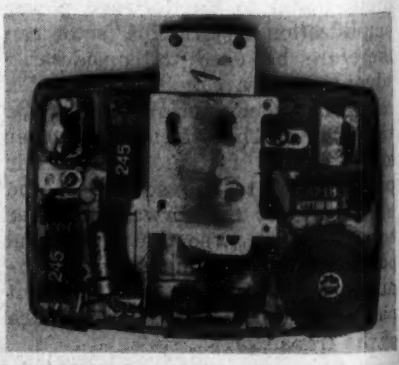

RINGS and SLEEVES..

are just two of the many plastic components made by Anchor. Among others are second anode contact assemblies, stamped insulating parts, complete insulating assemblies for tri-color tubes and extruded channels, rods and tubes.

ANCHOR INDUSTRIAL
COMPANY
36-36 36th Street
Long Island City 6, N. Y.

FOR LONG LIFE IN LOW AMPERAGE CIRCUITS THE GRAYHILL SERIES 4000 SINGLE-POLE, SINGLE THROW MOMENTARY CONTACT, PUSH-BUTTON SWITCH IS IDEAL. IT'S AVAILABLE EITHER NORMALLY OPEN OR NORMALLY CLOSED. CONSERVATIVELY RATED AT ½ AMP., 115 V.A.C., NON-INDUCTIVE.

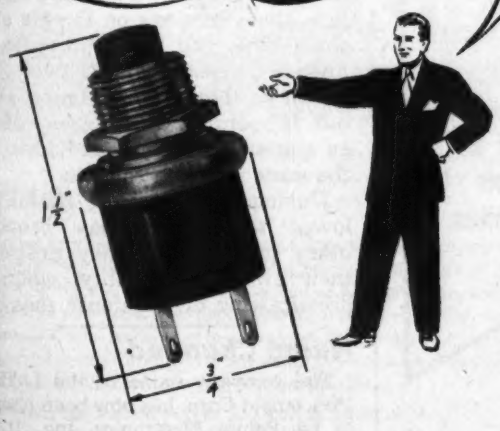

Grayhill

GET DETAILS—Write for the Grayhill Catalog now.

4542 West Madison St., Chicago 24, Illinois

To meet the strictest requirements of both Government and Industry, specify



RR **JAN TYPE Germanium Diodes**

Precision made, easy to handle, easy to assemble—the tapered shape shows polarity at a glance! Make Radio Receptor Germanium Diodes your first choice in the large variety of electronic circuits where JAN types are a must.

1N69
1N70
1N81

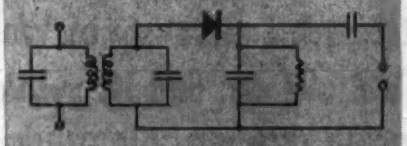

DETECTOR CIRCUIT

TYPICAL USES

COMPUTOR CIRCUITS
CLAMPING CIRCUITS
RF DETECTORS
CONTROL CIRCUITS
DISCRIMINATORS
MODULATORS
NOISE ELIMINATORS
CLIPPERS
LEVEL SETTERS
RESTORER CIRCUITS

JAN TYPES • ALL VALUES MEASURED AT 25°C.

CODE NO.	Min. Forward Current at 1 Volt (MA)	Max. Reverse Current (Micro-Amperes)	*Average Rectified Current (MA Max.)	†Minimum Reverse Volts	Max. Cont. Reverse Operating Volts
1N69	5.0	50 @–10V 850 @–50V	40	75	60
Rectification efficiency: 35% minimum in 100 MC test circuit.					
1N70	3.0	25 @–10V 300 @–50V	30	125	100
1N81	3.0	10 @–10V	30	50	40



CLAMPING CIRCUIT

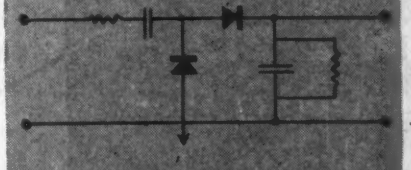

COUNTING RATE CIRCUIT

*Average half wave rectified current at 60 CPS and 25°C. Consult us for ratings at other conditions.

†For zero dynamic resistance.

Radio Receptor Germanium Diodes may hold the answer to many of your problems. Our engineers will be glad to study your requirements and submit their recommendations. Many other types, both standard and special, are available... Write us!

SELETRON & GERMANIUM DIVISION
RADIO RECEPTOR COMPANY, INC.
RR *Since 1922 in Radio and Electronics* RR
SALES DEPARTMENT: 251 WEST 19TH STREET • NEW YORK 11, N. Y.
FACTORY: 84 NORTH 9TH STREET • BROOKLYN 11, N. Y.

Engineers... Scientists...

Mechanical Engineers—Electrical Engineers

Servo Engineers—Aerodynamicists—Physicists—

Do You Know the MELPAR Story?

For complete information about the opportunities available for qualified engineers and scientists write to

PERSONNEL DIRECTOR

melpar, inc.

The Research Laboratory of Westinghouse Air Brake Co. and its subsidiaries

452 Swann Avenue, Alexandria, Virginia

or 10 Potter St., Cambridge, Mass.

NRK
Microwave Assemblies, Radar Components, and Precision Instruments . . . manufactured to your Blueprints and Specifications.
See us at
BOOTH 2-212
Radio Engineering Show
MARCH 23-26
Grand Central Palace
New York City
N. R. K. MFG. & ENGINEERING CO.
4601 WEST ADDISON STREET • CHICAGO 41, ILLINOIS

CONELRAD

(*Continued from page* 85)

properly adjusted throughout the group, and program and sequential control lines are provided for each member station. One at a time, in non-cyclical sequence, each station goes on the air for a random period varying from 5 to 40 seconds. Since one station comes on the air as another goes off, there is no appreciable lost-air time or carrier overlap. Furthermore, because all stations in the group carry the same program, there is no appreciable interruption of program service. The type of equipment to be used for controlling sequential switching and accomplishing self-supervision will be mutually agreed upon by the member station and the FCC.

On-Off Mode: The on-off mode may be applied to individual stations operated by themselves, or to groups being operated in the sequential mode as is illustrated in Fig. 2. For individual stations, the on-air time is about 10 seconds, and the intervening time is of the order of 30 minutes. When applied to groups of stations, this mode will permit the group on-air and off-air times to be from 1 to 30 minutes for each. As in the sequential mode, power is adjusted by the FCC to achieve CONELRAD objectives.

Pulsating Mode: With the pulsating mode, applicable to individual stations or sequential groups, the transmitter power of the station on the air is varied over a 10 db range, at a non-cyclical rate of about 10 to 45 seconds. In a given area such as a city, if several stations are being operated individually, all will carry the same program provided by lines from a common source.

Synchronous Mode: In the synchronous mode, two or more stations in a given area are on the air at the same time, and with the same frequency or frequencies. Power is adjusted so that no one station stands out. If operated with a group of other stations, they are provided with the same program source.

During alert periods, stations allowed to operate may broadcast other programs as they desire, on their own responsibility, when not broadcasting civil defense messages.

Name Changed

The company name of the LaPointe Plascomold Corp. has now been changed to La Pointe Electronics, Inc., it was announced by company president, Jerome E. Respess. The name change will in no way affect the corporate structure of the Rockville, Conn. company and Vee D-X will continue to be the trademark of all its TV antennas.

PRECISION COIL FORM BOBBINS

- 15 TO 20% STRONGER
- GREATER INSULATION
- LIGHTER WEIGHT
- BETTER HEAT DISSIPATION
- INCREASED MOISTURE RESISTANCE

PRECISION Coil Bobbins are constructed with utmost care and are finished to your exact specifications. Only the finest materials are used.

Cores furnished in an infinite variety of sizes and shapes—kraft, fish paper, acetate, or combinations. Flanges cut to specification—plain or fitted with leads, slots or holes; embossed or recessed.

Send in specifications for sample and request new Arbor List of over 1500 sizes.

PRECISION PAPER TUBE CO.

2057 W. Charleston St. Chicago 47, Ill.
Plant No. 2, 79 Chapel St., Hartford, Conn.
Also Mfrs. of Precision Paper Tubes

For HEAVY DUTY WORK! Severest Electrical Services



P-506-CE—Plug with Cap



S-506-DB
Socket with deep Bracket

JONES PLUGS & SOCKETS

500 SERIES
Proven Quality!

For 5,000 Volts, 25 Amperes per Contact Alterable by circuit Characteristics.

Socket contacts of phosphor bronze, knife-switch type, cadmium plated. Plug contacts hard brass, cadmium plated. Made in 2, 4, 6, 8, 10, and 12 contacts. Plugs and sockets polarized. Long leakage path from terminal, and terminal to ground. Caps and brackets, steel parkerized (rust-proofed). Plug and socket blocks interchangeable in caps and brackets. Terminal connections most accessible. Cap insulated with canvas bakelite.

Write for Jones BULLETIN 500 for full details on line.

Jones
HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION
CHICAGO 24, ILLINOIS
SUBSIDIARY OF UNITED-CARR FASTENER CORP.

you tell us

We design and manufacture the world's largest variety of industrial slides, used mainly today in electronic equipment. Pictured is a typical example, in which the slides provide easy access for servicing any component.





1. The component can slide out fully, easily. Sustains up to 200 pounds per pair. **2.** The component can be tilted and locked at any of several angles, up to plus 90° or minus 90°.





3. If desired, can be entirely removed and returned.

Does this suggest any new applications in your field? Tell us.

Grant Industrial Slides

a product of the engineering department of Grant Pulley and Hardware Co.
31-75 Whitestone Parkway, Flushing, N. Y.

The New 1953 EDITION of the WELCH CHART OF THE ATOMS

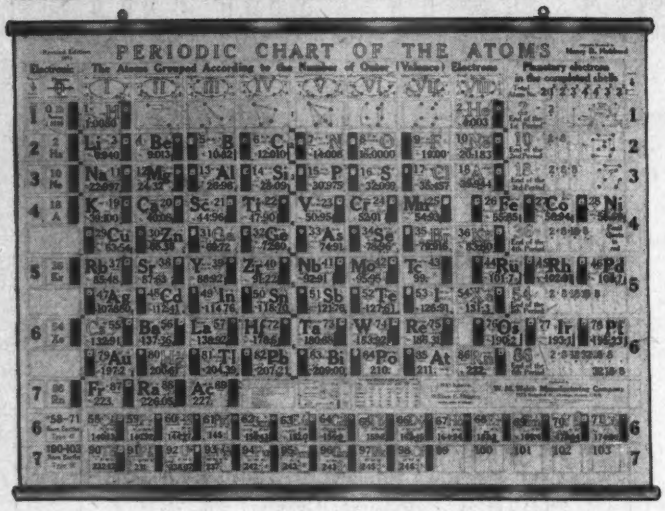

With 1952 International Chemical Society Atomic Weights

• ***Extensively Revised to Include***

- **Comprehensive Tabulation of Isotopes**
- **The latest Data on All 98 Elements**
- **The Most Recent Information About the Transuranic Elements Including Derkelium and Californium**

A comprehensive, 48-page, key booklet is furnished with each chart. It contains a brief discourse on the atom and the periodic law, a bibliography, a detailed explanation of the chart data, numerous tables and graphs, and a large black and white reproduction of the chart.

No. 4854. Chart of The Atoms, 1953 Edition. With formed-metal chart molding at top and bottom with eyelets for hanging, non-glare protective coating and key booklet. **Each $7.50**

No. 4854A. Chart of The Atoms, 1953 Edition. Mounted on a spring roller within a metal case, suitable for permanent wall mounting, non-glare protective coated, and with key booklet. **Each $15.00**

Booth 2-137 I.R.E. Convention Grand Cent. Palace N. Y. C. Mar. 23-26

W. M. WELCH SCIENTIFIC COMPANY
DIVISION OF W. M. WELCH MANUFACTURING COMPANY
ESTABLISHED 1880
1515 SEDGWICK STREET DEPT. J CHICAGO 10 ILLINOIS U.S.A.

TAKE NO CHANCES WITH VITAL EQUIPMENT... *Specify*

SERIES 6918 or 6924
RACKS by PAR-METAL

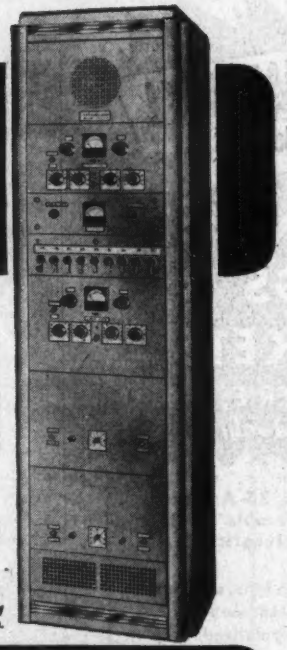

18½" or 24" DEEP, for 19" WIDE PANELS

- *Panel Spaces:* 61¼", 70", or 77" high.
- Finished in Prime Coat, Black Wrinkle, Grey Lacquer, Grey Wrinkle.
- Series 6918 or 6924 Racks may be used in *"rows"* or *"gangs,"* as corner trims are removable from *front* of cabinet.
- Standard shelves and roller trucks are manufactured by us for use with these Racks.

THESE RACKS ARE MODERATELY PRICED and AVAILABLE FOR SHIPMENT FROM STOCK

Our P-6924 Rack as used by Gai-Tronics, Inc., Reading, Pa.

Planning an electronic product? Consult Par-Metal for
RACKS • CABINETS
CHASSIS • PANELS

Remember, Par-Metal equipment is made by *electronic specialists,* not just a sheet metal shop.

Made by Electronic Specialists!

PAR-METAL
PRODUCTS CORPORATION
32-62 — 49th ST., LONG ISLAND CITY 3, N. Y.
Tel.: AStoria 8-8905
Export Dept.: Rocke International Corp.
13 East 40 Street, New York 16, N. Y.

WRITE FOR CATALOG!

Air Coaxial

(*Continued from page 84*)

$$_{uc}f_c = \frac{7514\ \text{K.}}{\sqrt{\epsilon'}\,d\,[1 + \log_{10}^{-1}(Z_o\sqrt{\epsilon'}/138)]} \quad (7)$$

For undercut coaxial transmission line the outer conductor remains fixed and the inner conductor diameter is reduced, with the resultant cutoff frequency given by the following relationship, in terms of the inside diameter of the outer conductor of the air line:

$$_{uc}f_c = \frac{7514\ \text{K.}}{\sqrt{\epsilon'}\,D\,[1 + \log_{10}^{-1}(-Z_o\sqrt{\epsilon'}/138)]} \quad (8)$$

In terms of the outside diameter of the inner conductor of the air line, the cutoff frequency is given by:

$$_{uc}f_c = \frac{7514\ \text{K.}}{\sqrt{\epsilon'}\,d\left[\log_{10}^{-1}\frac{Z_o}{138} + \log_{10}^{-1}\frac{Z_o}{138}(1-\sqrt{\epsilon'})\right]} \quad (9)$$

For transmission lines of 50 ohms iterative or characteristic impedance the cutoff frequencies are given below:

For the uniform air dielectric line:

$$f_c = 5350/D \quad (10)$$

For the overcut coaxial line in the region of the supporting structure:

$$_{oc}f_c = \frac{17{,}290\ \text{K.}}{\sqrt{\epsilon'}\,D\,[1 + \log_{10}^{-1}(0.362\sqrt{\epsilon'})} \quad (11)$$

For the undercut coaxial line in the region of the supporting structure: (12)

$$_{uc}f_c = \frac{7514\ \text{K.}}{\sqrt{\epsilon'}\,D\,[1 + \log_{10}^{-1}(-0.362\sqrt{\epsilon'})]}$$

For the specific cases of Teflon and Polystyrene with relative dielectric constants of 2.1 and 2.544 respectively, the following relationships are used to compute the cutoff frequency:

Overcut line containing Teflon:

$$_{oc}f_c = 2.82 \times 10^3/D \quad (13)$$

Overcut line containing Polystyrene:

$$_{oc}f_c = 2.33 \times 10^3/D \quad (14)$$

Undercut line containing Teflon:

$$_{uc}f_c = 4.10 \times 10^3/D \quad (15)$$

Undercut line containing Polystyrene:

$$_{uc}f_c = 3.83 \times 10^3/D \quad (16)$$

Values of cutoff frequency calculated from Eq. 10, 13 through 16, for the proposed standard sizes of coaxial transmission line are given in Table II.

As the frequency of operation of a coaxial, metallic conductor, transmission line is reduced below several megacycles, the magnetic field energy stored in the metal walls of the transmission line reflects itself in an increase in the series induct-

ance per unit length with a consequent increase in the characteristic impedance and a reduction of the velocity of propagation. In practice, the metal walls are sufficiently thick so that propagation and reflection effects exterior to the outer conductor do not influence the fields which are excited within the coaxial transmission line. The "depth of penetration" for non-ferromagnetic materials is given by the relationship:

$$\delta = 5.033\sqrt{\rho/f} \qquad (17)$$

For copper, δ, "the depth of penetration," has a value of 0.021 cm. at a frequency as low at 0.1 MC. Thus, any solid dielectric coaxial conductor having a thickness sufficient for reasonable structural strength and rigidity will have walls thicker than three or four times the "depth of penetration." For the relatively low frequencies being considered the distributed parameter transmission line solution is an excellent approximation for the transverse magnetic wave transmitted in such lines, since the amount of displacement current and the electric field energy associated with the longitudinal electric field at the wall and in the space between conductors is insignificant.

The rate of change of transmission line voltage, V, in the propagation direction, s, is given by:

$$dV/ds = -ZI \qquad (18)$$

The series impedance, Z, is the quantity which is affected by energy storage in the walls at low frequency operation. This, in turn, affects the propagation constant:

$$\gamma = \sqrt{ZY} \qquad (19)$$

and the characteristic or iterative impedance:

$$Z_o = \sqrt{Z/Y} \qquad (20)$$

In the length, ds, the voltage drop, $-dV$, may be considered to be made up of two parts:

1. The normal TEM transmission line voltage drop per unit length, $j\omega L_0 I$, from the magnetic field between the conductors.

2. The voltage drop per unit length along the magnetic surfaces, $(r_w + j\omega L_w I)$, where both conductors are considered. For a coaxial transmission line having a dielectric with a permeability equal to that of free space, $4\pi \times 10^{-7}$ h/m, the inductance per unit length, L_0, is given by: (21)

$$L_o = Z_o/C = [0.3336 \times 10^{-10} Z_o] \text{ h/cm}$$

The voltage drop at the metal surface is analyzed in terms of mag-

(*Continued on page* 164)

DX *Announces*

a NEW 90° YOKE for 27″ TUBES

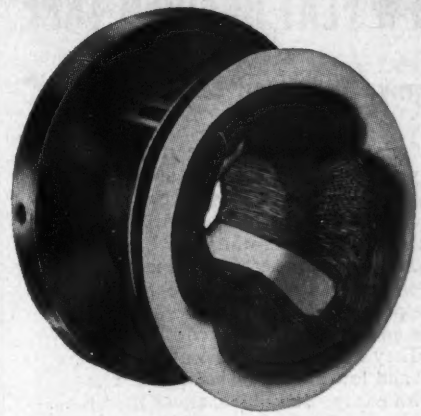

It's Engineered for TOP PERFORMANCE ... in Production *NOW!*

This new DX 90° Deflection Yoke has everything a television receiver manufacturer wants . . . a sharp full-screen focus, a minimum of pincushioning, the ultimate in compactness and a price that's downright attractive. Because this yoke has been brilliantly designed for mass production on DX's specialized equipment, it warrants immediate consideration in your 27″ receiver plans. Write us today.

DEFLECTION YOKES . . . TOROID COILS . . . CRYSTALS
I. F. TRANSFORMERS . . . R. F. COILS . . . DISCRIMINATORS
SPEAKERS . . . TV TUNERS . . . ION TRAPS . . . TRANSFORMERS

DX COMPONENTS
"the heart of a good television receiver"

DX RADIO PRODUCTS CO.
GENERAL OFFICES: 2300 W. ARMITAGE AVE., CHICAGO 47, ILL.

2 ways G-E lamps help make products safer, easier to use

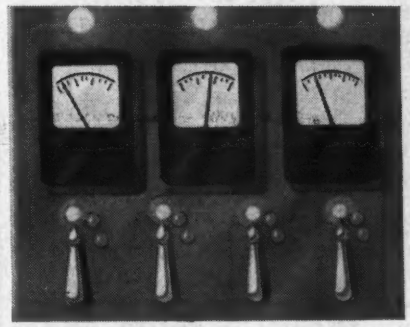

1. FLASH WARNING SIGNALS
General Electric filament and neon glow lamps on control panels quickly indicate "trouble spots" in circuit operations.

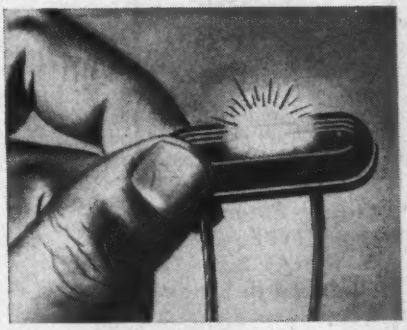

2. INDICATE LIVE CIRCUITS
With a little G-E indicator lamp, operators can tell at a glance whether electronic equipment is operating correctly.

A LITTLE spot of light can go a long way toward improving electronic devices. Above are two examples. They show how General Electric lamp bulbs add extra safety and convenience. Chances are, small G-E lamps can make your product better, too. More than 480 tests and inspections insure their quality. For more information, write to Lamp Division, General Electric Company, Department 166-TT-3, Cleveland 12, Ohio.

GENERAL ELECTRIC

NEW!

FUNGUS-PROOF

NYLON LACING CORD and FLAT BRAIDED TAPE

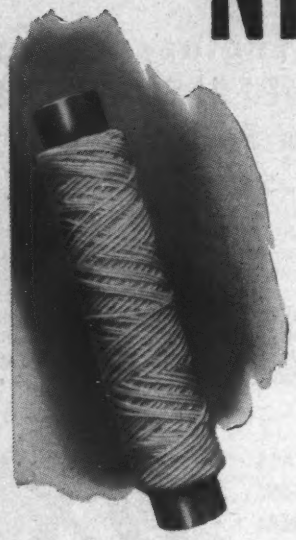

Meets Army, Navy and Civilian "specs"

This sensational new development has proved to be a boon to electronic equipment. The special synthetic resin coating on Heminway & Bartlett's Nylon Lacing Cord and Flat Braided Tape resists the growth of mold and micro-organisms — factors most often responsible for the deterioration of linen and cotton lacing cords and tapes. They have high abrasion resistance and low moisture absorption. The finish has the desirable malleability of wax and is non-toxic to humans.

We'll be glad to send you full information and samples. Why not write us today.

VISIT OUR BOOTH
No. 3-513
AT THE I. R. E. SHOW

The Heminway & Bartlett Mfg. Co., 500 Fifth Avenue, New York 36, *Sales Offices:* Chicago, Boston, St. Louis, Philadelphia, Cincinnati, San Francisco, Charlotte, N. C., Gloversville, N. Y.

NOW! CUT COSTS! INCREASE PROFITS!

Save on POTS • TUBES • RESISTORS



Carbon Potentiometers TYPE JU — RATED AT 2 WATTS Shafts up to 2" long

1 to 5 .... 1.10
6 to 11 .... 1.05
12 to 24 ... 1.00
25 and over } .95

1B22	2.00	100TH	7.95
1B24	9.50	304TH	6.75
2C39A	27.00	394A	3.75
2C40	12.50	801A	.35
2C43	17.95	954	.25
2C51	5.75	955	.35
2D21	1.35	956	.35
3Q4	.75	5654	1.98
3S4	.75	5670	5.50
5FP7	3.49	5687	5.25
6AJ5	1.35	5702	4.00
6AK5	.65	5704	2.50
6AK5W	1.79	5705	1.50
6AK6	.99	5726	2.10
6AL5	.60	5744	3.98
6AQ5	.50	5763	1.50
6AR6	2.75	5787	4.50
6AS7G	4.25	5829	2.25
6J6W	3.50	8013	2.50
6SG7W	3.75	8020	1.25
6SJ7	.75	8025	4.50
6V6GT	.75	9004	.35
717A	1.75	9006	.35
725A	5.95	ELC6J	7.50
10Y	.35	ELC6C	13.95
24G	1.25		

Type EB—½ WATT
Type GB—1 WATT
Type HB—2 WATTS

Insulated Carbon Resistors. Standard R.M.A. Values, 10 ohms to 22 megohms. Money Back Guarantee! Immediate Delivery!

Type	Watt	Tolerance	100 to 499	500 to 999	1000 & over
EB	½	5%	.08	.075	.07
		10%	.04	.037	.035
GB	1	5%	.14	.12	.11
		10%	.07	.06	.055
HB	2	5%	.18	.16	.16
		10%	.09	.08	.08

Resisco Corporation
SERVING THE WORLD OF ELECTRONICS
366 Broadway, N.Y.C. 13. RE 2-0284

TREMENDOUS STOCK
LOWEST PRICES
IMMEDIATE DELIVERY
Write for FREE color code sheet

netic and electric fields tangential to the surface of the metal conductor. Within the metal conductor of the transmission line, the magnetic field, angularly directed as in the space between the conductors, is given by:

$$H\theta = H_o \left[e^{-\left(\frac{1}{\delta} + j\frac{1}{\delta}\right)|\gamma - \gamma_o|} - e^{+\left(\frac{1}{\delta} + j\frac{1}{\delta}\right)|\gamma - \gamma_o|} \right] \quad (22)$$

The field in the metal decays very rapidly from the place of initiation inside the transmission line, allowing for normal practical diameters, the linear propagation formulas given. Since for any nominal wall thickness as has been previously shown, the attenuation is sufficient to hide any impedance effects, the reflected wave can be set equal to zero. Accordingly, at the internal metal surfaces the intrinsic wave impedance of the conductor is seen. The longitudinal electric field at the metal surface is given by:

$$E_z = \eta_m H_o \quad (23)$$

Where the intrinsic impedance, η_m of the metal is given by:

$$\eta_m = R_s + j\, R_s = \frac{1}{\delta\sigma} + j\frac{1}{\delta\sigma} \quad (24)$$

$$R_s = 0.1987\sqrt{\rho f} \quad (25)$$

The values of R_s, the "skin effect resistance," and the values of δ, the "depth of penetration" for various metals are plotted in Figs. 3 and 4.

For a length, ds, of transmission line, the voltage drop at the inner surface of conductors caused by the intrinsic impedance is then given by:

$$(dV) = (\eta_m\, ds)\, H_o \quad (26)$$

For outer conductor H_o

$$(dV) = (\eta_m\, ds)\, H_o \quad (27)$$

For inner conductor H_o

Where the angular magnetic fields in these surfaces are given by:

$$H_o = I/\pi D \quad (28)$$

For outer conductor

$$H_o = I/\pi d \quad (29)$$

For inner conductor

The series impedances per unit length introduced by the conductors is then:

$$Z = R_s/\pi D + j\, R_s/\pi D \quad (30)$$

For outer conductor

$$Z = R_s/\pi d + j\, R_s/\pi d \quad (31)$$

For inner conductor

The total series impedances introduced by the intrinsic impedances of both conductors and the magnetic field in the gas filled space between

them is given by the following relationship:

$$Z = \frac{R_s}{\pi}\left(\frac{1}{D}+\frac{1}{d}\right) + j\omega\left[L_o + \frac{R_s}{\omega\pi}\left(\frac{1}{D}+\frac{1}{d}\right)\right] \quad (32)$$

$$Z = 0.0249\sqrt{\rho f}\left(\frac{1}{D}+\frac{1}{d}\right) + j\left[2.096\times 10^{-4} f Z_o + 0.0249\sqrt{\rho f}\left(\frac{1}{D}+\frac{1}{d}\right)\right] \quad (33)$$

For frequencies below several megacycles the primary effect of the real part of the series impedance per unit length is to introduce attenuation. It can be seen from the explanation given that the wall inductance decreases inversely as the size of the transmission line, assuming a constant diameter ratio, that is, a constant inductance associated with the space between the conductors.

For the frequency range under consideration, the real part of the series impedance is very small by comparison to the imaginary portion. From a combination of Eqs. (20) and (33) the low frequency characteristic impedance is obtained:

$$Z_s = \sqrt{Z_o^2 + 118.82\, Z_o\sqrt{\frac{\rho}{f}}\left(\frac{1}{D}+\frac{1}{d}\right)} \cdot \left[1 - \frac{j\ 0.0249\sqrt{\rho f}\left(\frac{1}{D}+\frac{1}{d}\right)}{2Z_o^2 + 118.82\, Z_o\sqrt{\frac{\rho}{f}}\left(\frac{1}{D}+\frac{1}{d}\right)}\right] \quad (34)$$

$$\frac{0.0249\sqrt{\rho f}\left(\frac{1}{D}+\frac{1}{d}\right)}{2\left[Z_o^2 + 118.82\, Z_o\sqrt{\frac{\rho}{f}}\left(\frac{1}{D}+\frac{1}{d}\right)\right]} < 0.0001\frac{f}{Z_o} \quad (35)$$

Thus, for all practical impedances, in the frequency range under consideration, the low frequency characteristic impedance is given by:

$$Z_o' = Z_o\sqrt{1 + \frac{118.82}{Z_o}\sqrt{\frac{\rho}{f}}\left(\frac{1}{D}+\frac{1}{d}\right)} \quad (36)$$

The relative velocity of propagation, v'/C, is obtained from the relationship:

$$\frac{v'}{C} = \frac{Z_o}{Z_s} = \sqrt{\frac{1}{1 + \frac{118.82}{Z_o}\sqrt{\frac{\rho}{f}}\left(\frac{1}{D}+\frac{1}{d}\right)}} \quad (37)$$

For 50 ohm transmission line, substituting Eq. (5) into Eq. (36) and (37), the following relationships are obtained:

$$Z_o' = 50\sqrt{1 + \frac{7.844}{D}\sqrt{\frac{\rho}{f}}} \quad (38)$$

(*Continued on page* 166)

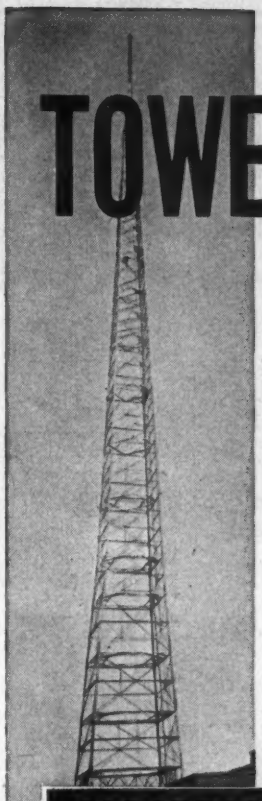

Complete, Competent

TOWER AND ANTENNA ERECTION SERVICE

HERE'S WHY YOU SHOULD CALL E.T.S.

★ EXPERIENCE—ETS has years of experience in the tower erection field. Their record includes the erection and installation of all type AM, FM, TV, micro-wave, and communication towers of all kinds . . . through the United States . . . large jobs and small jobs . . . all handled with skill and satisfaction.

★ EQUIPMENT—ETS has a complete line of equipment to handle your job, manned by skilled workmen with proper engineer supervision. This assures you satisfaction, speed, and highest quality workmanship.

★ DEPENDABILITY—ETS has an enviable record of dependability. The ability to handle every detail of a job from planning to final completion including antenna mounting and coaxial cable installation is extremely desirable from your standpoint.

For your tower erection needs call on ETS. Phone us direct or have your contractor or supply house contact us.

Free brochure sent on request.

Tower installation illustrated here is station WSAU, Wausau, Wisconsin

ELECTRICAL TOWER SERVICE, INC.

P. O. BOX 1205 — PEORIA, ILL. — PHONE: PEORIA 3-9846

Installation and erection of all type towers—No finer service available —anywhere.

Permoflux CEE-COR®

High permeability—low losses—high operating induction—controllable air gap—low assembly cost.

Permoflux CEE-CORs, made to exacting electrical and mechanical tolerances from grain-oriented silicon steel, are cores of highest permeability and lowest losses for transformers and reactors requiring higher operating flux densities. Ideal for pulse, audio, power and saturable core applications.

They are fabricated, under closely controlled conditions, of 1-mil, 2-mil, 4-mil or 12-mil silicon strip in a variety of core areas and window sizes. After winding they are heat treated and bonded, cut in halves, and gap surfaces subjected to a special monomolecular rust inhibiting process. Following precise mechanical and electrical tests under actual operating conditions, the finished cores in matched pairs are sealed in a plastic for protection in shipment and long storage.

We invite your inquiries. Ask for electrical and dimensional data sheets.

PERMOFLUX PERM-O-FLUX® CORPORATION

"SOUND IN DESIGN"

4900 WEST GRAND AVENUE, CHICAGO 39, ILLINOIS

236 S. VERDUGO ROAD • GLENDALE 5, CALIF.

IF YOU NEED **RESISTORS**

Where unit measurement is Ω

then . . . LEGRI S COMPANY

since 1945 Resistors is our business

ANY RESISTORS:

Fixed or variable (Allen-Bradley too)
Carbon or wirewound
⅛ watt or 300 watt
insulated or not
precision of ¼ % or up to 20% tolerance
any make—any type—any value
one or one million

CONTROLS — POTENTIOMETERS — RHEOSTATS

Allen Bradley or any other make
Attenuator any type

LEGRI S COMPANY

158 West 99 St., New York 25, N. Y.
Phone: University 5-4110

WRITE FOR CATALOG

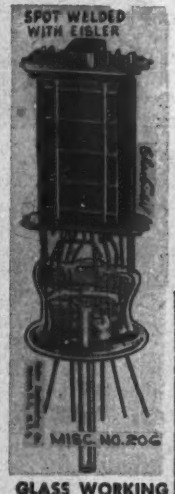



GLASS WORKING ELECTRONICS MACHINES FOR

DESIGNER AND BUILDER OF TRANSFORMERS — WELDERS GLASS WORKING EQUIPMENT
Cathode Ray; Radio Tubes (Standard, Miniature, Sub Miniature); Fluorescent Lamps; Glass Ampoules; Vials; Incandescent Lamps

EISLER ENGINEERING CO., Inc.
770 So. 13th St. Newark 3, N. J.

Simpler . . . faster
LOGARITHMIC CONVERSION

Kay-Lab
LOGATEN
(Improved Models)

KAY-LAB Logatens are non-linear attenuating networks whose output is the logarithm of the input voltage. New models afford larger dynamic range, higher accuracy, and greater stability. These units are suitable for dynamic compression plotting logarithmic decay curves and many other applications. High accuracy units are also available for incorporation in logarithmic computer systems.

WRITE FOR BULLETIN "M"

Visit KAY LAB's booth at the I. R. E. Show

Kay-Lab PRECISION ELECTRONIC INSTRUMENTS

KALBFELL LABORATORIES, INC.
1090 MORENA BLVD. P.O. BOX 1578
SAN DIEGO 10, CALIFORNIA

$$\frac{V'}{C} = \frac{1}{\sqrt{1 + \frac{7.844}{D}\sqrt{\frac{\rho}{f}}}} \quad (39)$$

The characteristic impedances and relative velocities computed from Eqs. (38) and (39) are given in Table II for the proposed standard coaxial line sizes at frequencies of 0.1 and 1.0 MC.

Appendix A. The 75 Ohm Coaxial Line.

The following covers the essential relationships and tabulated data (see Table Ia) and curves for 75 ohm coaxial, gas filled transmission lines now in the process of standardization. The following formulas have been numbered to correspond to the appropriate 50 ohm relationship given in the original text:

For the cutoff frequency for TE_{11} mode in the uniform air dielectric line (75 ohms):

$$f_c = 5999/D \quad (10a)$$

For overcut coaxial line (75 ohms) in the region of the supporting structure:

$$_{oc}f_c = \frac{26{,}224\ K_s}{\sqrt{\epsilon'}\ D\ [1 + \log^{-1}_{10}\ (0.543\ \sqrt{\epsilon'})} \quad (11a)$$

For the undercut coaxial line (75 ohms) in the region of the supporting structure:

$$_{uc}f_c = \frac{7514\ K_s}{\sqrt{\epsilon'}\ D\ [1 + \log^{-1}_{10}\ (-0.543\ \sqrt{\epsilon'})} \quad (12a)$$

Overcut line containing Teflon (ϵ'=2.1):

$$_{oc}f_c = 2.579 \times 10^3/D \quad (13a)$$

Overcut line containing Polystyrene (ϵ'=2.544):

$$_{oc}f_c = 1.986 \times 10^3/D \quad (14a)$$

Undercut line containing Teflon:

$$_{uc}f_c = 4.526 \times 10^3/D \quad (15a)$$

Undercut line containing Teflon:

$$_{uc}f_c = 4.179 \times 10^3/D \quad (16a)$$

For 75 ohm transmission line, substituting Eq. (5) into Eq. (36) and (37), the following relationships are obtained:

Low frequency characteristic impedance:

$$Z^1_o = 75\sqrt{1 + \frac{7.103}{D}\sqrt{\frac{\rho}{f}}} \quad (38a)$$

The low frequency relative velocity of propagation:

$$\frac{V'}{C} = \frac{1}{\sqrt{1 + \frac{7.103}{D}\sqrt{\frac{\rho}{f}}}} \quad (39a)$$

The characteristic impedances and relative velocities together with the TE_{11} mode cutoff frequencies are given in Table IIa for the proposed standard 75 ohm coaxial line sizes.

Curves of Ks and Diameter Ratios versus Dielectric Constant are given in Figs. 1a and 2a, respectively.

WHUM-TV ON AIR

Looking up antenna tower and waveguide transmission line of Reading, Pa.'s UHF WHUM-TV (channel 61). Tower is 1000 ft. high. Station went on air Feb. 10 at 12:12 AM

Crosstalk

(*Continued from page* 147)

achieved in the equipment in Montreal. In order to measure the crosstalk, the set up shown in Fig. 4 was used. Tone from an oscillator was fed into five input networks and thence through the system to a total of ten different outputs. In all some 105 amplifiers and their accompanying circuits were energized. When the correct levels, as shown in Fig. 4 had been achieved, the input to one network was removed and measurements were made of the noise level at the corresponding output as the frequency of interfering tone was varied. The results are shown in Fig. 6 (bottom section) from

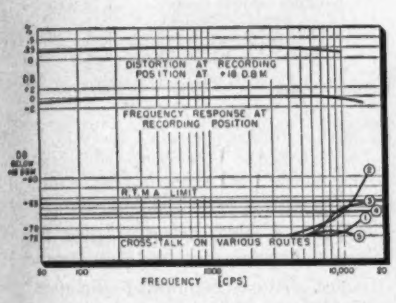
DISTORTION AT RECORDING POSITION AT +18 DBM
FREQUENCY RESPONSE AT RECORDING POSITION
R.T.M.A. LIMIT
CROSS-TALK ON VARIOUS ROUTES
FREQUENCY [CPS]

Fig. 6: Measured crosstalk characteristics

which it will be seen that the crosstalk is below the noise level in all cases until the frequency rises above 4000 c/s and that except in the case of one route it remains below the R.T.M.A. signal/noise limit of 65 db up to 15000 c/s. The exception crosses the 65 db line at about 12,000 c/s. Doubtless, if it had been thought necessary, this route could have been brought into line with the others, but we think it will be agreed that the performance as demonstrated by these curves is, to say the least, entirely adequate.

Joint U.S.-British TV Camera Research

General Precision Lab., Inc., and Pye Ltd., Cambridge, England, have signed an agreement providing for an expanded program of joint research and development in the field of industrial and broadcast TV cameras and studio equipment. The two companies have been associated for three years under an agreement which provided for the development of studio equipment currently marketed by GPL. General Precision will manufacture cameras and associated studio items in America, and Pye in England, for independent sale through their respective marketing organizations, but with the combined engineering knowledge of the two firms.

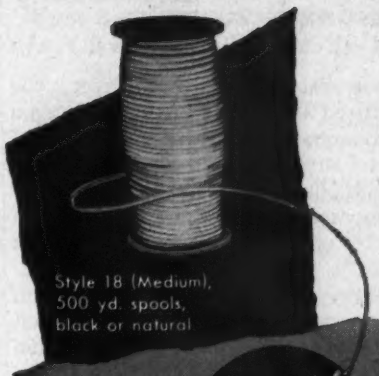

for lacings that stay put!

GUDELACE

BRAIDED NYLON LACING TAPE*



A New and Revolutionary Type of Lacing

- Saves time, saves money, greatly reduces the number of rejects
- Won't "bite through" insulation
- Won't cut wiremen's fingers or cause dermatitis
- Ties easier, ties tighter and cuts down on slipping of knots

Let GUDELACE answer your lacing problems.

Write for FREE samples and prices.

*Patent Pending.

GUDEBROD BROS. SILK CO., INC.
Electronics Division Dept. B.
Main Office: 12 South 12th Street, Philadelphia 7, Pa.
225 West 34th Street, New York 1, N.Y.

KINETIX *Means*

ADVANCED ENGINEERING
HIGHEST PRECISION
CONTROLLED QUALITY
in the manufacture of
SYNCHROS
SERVO MOTORS
INDUCTION MOTORS
SWITCHBOARD INDICATOR LAMPS
OVERLOAD TRANSFORMERS
HI-ACCURACY TRANSFORMERS

The rapid growth of Kinetix Instrument Company has been the reward of exceptional engineering and superior facilities, plus strict adherence to the highest known standards of quality control in the electronic and electrical fields. We pledge ourselves to maintain the integrity of any product bearing the name KINETIX.

$\frac{1}{2} M v^2$

KINETIX INSTRUMENT CO., INC. 902 BROADWAY, NEW YORK 10, N. Y.
West Coast Representative:
Joe Davidson & Associates P. O. Box 108, South Gate, Calif.

PRECISION

IS THE WATCHWORD TODAY IN ELECTRONICS

...as technological advancements call for circuits of increasing accuracy and dependability!

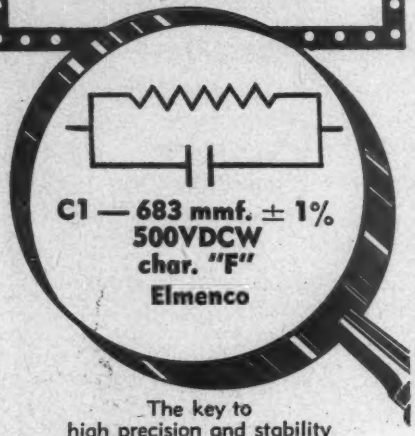

The key to high precision and stability lies in proper selection of mica capacitors, made possible through our ability to provide ANY CAPACITY at ANY TOLERANCE with the highest characteristics within the ranges specified for molded mica capacitors.



SINGLE UP TO 15000 MMF

DUAL UP TO 30000 MMF

TRIPLE UP TO 45000 MMF

Any Capacity
Any Tolerance (to ± 0.5%)
JAN Characteristic "F" or Better for Most Capacity Values.

All capacitors are ELMENCO and are manufactured in accordance with JAN-C-5 specifications. Known the world over for their reliability under all operating conditions, ELMENCO CAPACITORS are chosen by manufacturers requiring the highest quality components for their products.

Write for our free descriptive catalog and for information regarding your special product requirements.

ARCO
ELECTRONICS INC.
103 LAFAYETTE ST., N. Y. 13, N. Y.

Casting Resins

(*Continued from page* 81)

by a factor of 3. However, the unitized assemblies are then plugged into a chassis which may be made of metal and thus add significantly to weight. On the basis of the completed equipment the weight contribution due to embedment has run as low as 30%.

Many of the casting resins which are commercially available are not suitable for direct use on a specific application. This is particularly true if they are to be used in connection with components.

Needless to say, the properties of the cured resin are the primary consideration. However, it will be worthwhile to point out a few of the possibilities in formulation of the unpolymerized material.

Some of the changes which are often made consist of the addition to the base resin of fillers, diluents, plasticizers and other resins.

For example, if a polyester resin is to be used as an impregnant for paper capacitors, the viscosity must be adjusted so that complete penetration into the capacitor winding is assured, and at the same time the resin must not flow out of the winding during cure. The addition of monomeric styrene is one method of lowering viscosity. If in addition good low temperature characteristics of the capacitor are required, a plasticizer may be called for.

In the formulation of a dip compound for application of coatings to electrical components, a viscous material is required so that the build-up is sufficient to assure the desired degree of hermetic sealing. Inorganic fillers are often used. These include finely divided mica and talc. Here again, a plasticizer may be needed to improve impact resistance of the coating. Pigments may be incorporated for coloring.

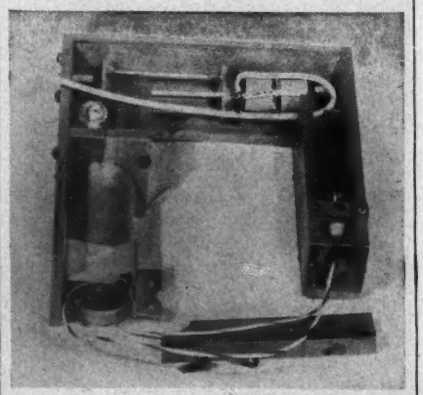

Fig. 5: Amplifier prior to embedment. Glass enclosed HV rectifiers must not be damaged by shrinkage of the resin at —65°C temperature

production speeds with BUTTON STEM MACHINE for sub-miniature tubes

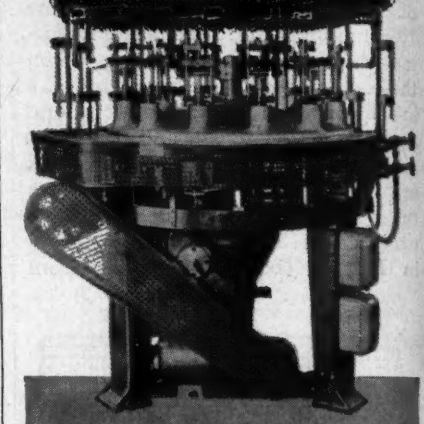

Leading manufacturers of sub-miniature tubes were frantically re-vamping their old machines to avoid production tie-ups in making glass buttons with lead wires. These machines did not meet the exacting requirements of sub-miniature tube production.

Shown above is Kahle's new model 427 Button Stem Machine designed for T2, T3 and T2 x 3 sub-miniature button stems. This is a 12 head machine, with upper and lower moulds on every lead; dual-motor drive — indexing and head are driven by separate motors — indexing by barrel cam and rollers (hardened and ground) totally enclosed in oil. This machine can be made available for any stems, — with any number of heads, — with automatic feeds.

But this is the solution to only one of many problems which Kahle engineers have been asked to solve over the past 40 years. If you have any difficulty which can be overcome with custom-designed machinery, *write today and learn—without obligation—how Kahle's experience can benefit you.*



Kahle
ENGINEERING COMPANY
1313 SEVENTH STREET
NORTH BERGEN N. J.

Conductive plastic materials have been formulated by adding carbon black and/or finely divided metal powders to casting resins.

Another interesting modification of casting resins is the addition of a flocculent material such as chopped glass monofilaments. A relatively small percentage weight addition results in an almost dry molding compound.

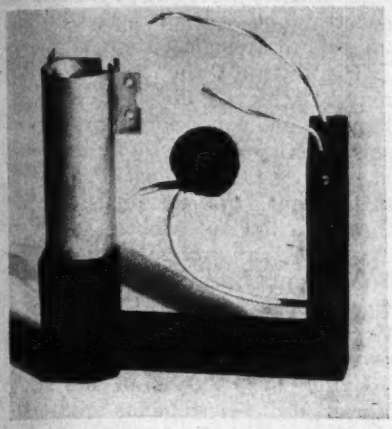

Fig. 6: Irregular shape of embedded amplifier in Fig. 5 is utilized to solve space problems

position. This may be used in a manner similar to that used in phenolic molding. Molding pressures, however, are much lower. Pressures as low as 25 psi have been used successfully.

There is a technique for encapsulation of electronic circuits which overcomes some of the disadvantages inherent in potting and casting. The method consists of the application of a dipped coating to the assembled unit.

A dipping formulation is prepared, and the unit is dipped into it and subsequently placed in an oven to render the coat non-flowing. Other coatings follow until the plastic build-up is sufficient for the degree of sealing required. When properly applied, the coating is completely uniform and is as effective in hermetic sealing as the casting process.

A few of the advantages are elimination of molds, decrease in weight and improved heat dissipation. The final assembly can be made just as rugged as the same circuit embedded.

Casting Resins as Applied to Components:

It will be of value to consider individual electrical components in which casting resins or formulations based on casting resins have been used.

Paper Capacitors: One of the most interesting uses of casting resins is as an impregnant for paper capacitors. The construction of a paper capacitor consists of winding two lengths of metal foil between which are one or

(*Continued on page* 170)

Now you can readily design your Electronic Equipment for unitized PLUG-IN UNIT CONSTRUCTION

New free Alden Handbook simplifies plug-in unit design. Presents complete line of basic components of tremendous flexibility for adapting your equipment to plug-in construction.

1 *Unitize your circuitry in compact vertical planes using Alden Terminal Card Mounting System.*

PRE-PUNCHED TERM. MTG. CARD + MINIATURE TERMINALS + JUMPER STRIP Eliminates wiring for common circuits + CARD-MTG. SOCKETS = YOUR COMPLETED CIRCUITS

You can use Alden Terminal Mounting Card with Alden Miniature Terminals, Jumper Strip and Sockets staked to accommodate any circuitry — making complete units ready for housing. Components snap into unique Alden Terminals, are held ready for soldering.

2 *Make your circuits neat accessible plug-in units by mounting in Alden "20" Package or Basic Chassis.*

ALDEN "20" PACKAGE — ALDEN BASIC CHASSIS — VARIOUS SIZES

Alden components provide standard plug-in or slide-in housings — with spares, your circuits become units replaceable in 30 seconds.

3 *Monitor your plug-in units with ALDEN SENSING ELEMENTS that spot trouble instantly.*

MINIATURE TEST JACK — MINIATURE INDICATING FUSE HOLDER — MINIATURE INDICATING LIGHT

4 *Get fool-proof unit interconnections and accessible check points with Alden Unit Cable and Back Connectors.*

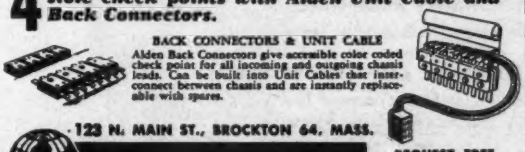

BACK CONNECTORS & UNIT CABLE

Alden Back Connectors give accessible color coded check point for all incoming and outgoing chassis leads. Can be built into Unit Cables that interconnect between chassis and are instantly replaceable with spares.

123 N. MAIN ST., BROCKTON 64, MASS.

NA-ALO ALDEN PRODUCTS CO.

REQUEST FREE "ALDEN HANDBOOK"

Here's the story on "PAN-I-LITE"—ideal monitor to indicate circuit condition



The panel lights you've used — were bulbs easy to replace? Were spares durable and always on hand? Did the user have to call a service man to replace a light? Was it hard to find panel room to build in the lights you wanted? Did your equipment look like a Christmas tree, with a confusing glare of lights?

At last — here's a Pan-i-Lite so well thought out you need never use any other. You know a dead light means danger. Pan-i-Lite's 1-piece bulb-and-lens is so easily replaceable, it's never neglected. Spares are unbreakable, easily kept in kit, vest pocket, or taped right in a recess of equipment. Instantly replaceable. Glow like a red hot poker, yet never with glare that gives false signal. Tiny Pan-i-Lites punch into a .348" drill hole, take about ½" behind panel, mount on centers .44" apart, allowing 900 Lites per sq. ft. of panel.

Now you can use indicator lights wherever needed. Avoid hazard of dead light, because bulb replacement instant, easy, by anyone. For ALL indicator needs, standardize on Pan-i-Lite, the light that really makes sense!

Send for Samples of 3 Pan-i-Lites with 4 brilliant color replacement bulbs. Laboratory Work Kit #33, price $6.00. OR SEND $1.00 FOR DEMONSTRATOR

If you have a labeling problem ordinary labels can't solve...use AVERY Kum-Kleen self-adhesive LABELS

...the tough ones are our specialty

...where other types of labels are found "wanting"...or when you need to substitute an attractive pressure-sensitive label for a costly nameplate... Avery Kum-Kleen labels are the *best* solution to your problem!

...and so are the other kind..

...where you want *faster* labeling... improved appearance...labels that won't pop, curl or peel...or those the housewife can remove without soaking or scraping...there's no substitute for an Avery Kum-Kleen label!

faster • easier • more economical

Patented Avery dispensers...manual or electric... feed die-cut *pressure-sensitive* labels off roller tape, ready to be LAID ON any clean, smooth surface. No moistening...no sticky fingers. Where can YOU use these labels in YOUR business? Write today for free samples, case histories and prices.

AVERY ADHESIVE LABEL CORP., DIV. 111

117 Liberty Street, New York 6 • 608 South Dearborn Street, Chicago 5
1616 So. California Ave., Monrovia, Cal. • Offices in Other Principal Cities

Originators of Pressure-Sensitive Labels

Plug-in Broadcast PRE-AMPLIFIER

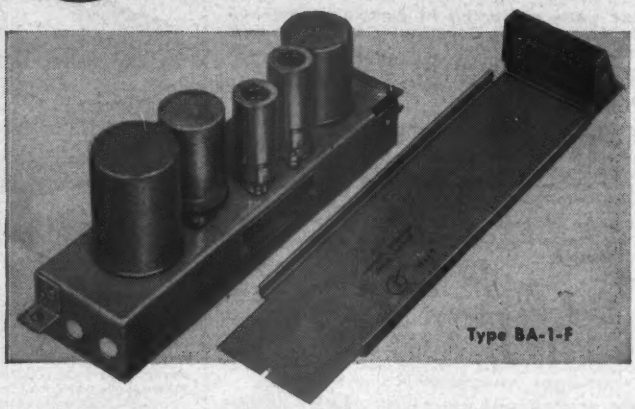

● **PLUG-IN DESIGN**—simplifies maintenance.
● **TWO STAGE**—Ideal for microphone or transcription pre-amplifier.
● **EXCELLENT FREQUENCY RESPONSE**—Features low distortion and noise level.
● **COMPACT...YET HIGHLY ACCESSIBLE.**

The G-E Plug-in Broadcast Audio line includes:

BA-1-F PRE-AMP **BA-12-C PGM/MON AMP** **BP-10-B POWER SUPPLY**

For information write: General Electric Co., Section 4833, Electronics Park, Syracuse, N.Y.

GENERAL ELECTRIC

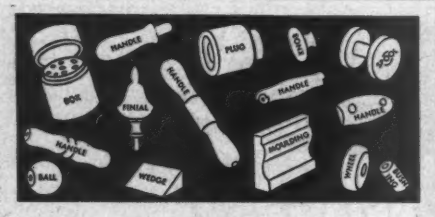

Why Not Use Wood?

For many electronic manufacturing applications, wood can frequently replace or supplement expensive or scarce metals and plastics.

Radio and Television Parts • Spools • Reels • Handles • Wedges • Wheels • Dowels • Knobs • Rollers Plugs • Blocks • Moulding • Shaping • Displays Available in Plain, Dip, Spray and Tumble Finishes

Send for Free Chart on Uses and Properties of Domestic Woods

AMERICAN WOOD WORKING COMPANY

1688 N. Lowell Ave. • Chicago 39, Ill.

Precision Wood Workers to the Electronic Industries Since 1893

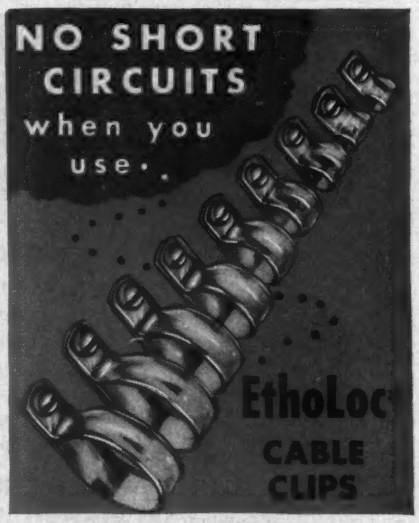

*TRADE MARK PAT. PEND.

ALL SIZES
⅛" dia. to 1¼" dia.

Made of TOUGH, DURABLE ETHYL CELLULOSE PLASTIC —FLEXIBLE, EASY TO INSTALL

Write for Sample and Full Information, including Strength Tests and Prices

WECKESSER CO.

ALSO MFRS OF ALL NYLON CABLE CLIPS

5259 N. Avondale Ave. • Chicago 30, Ill.

more layers of very fine Kraft paper. To produce the finished capacitors, the winding is carefully dried and impregnated. Common impregnants are oil and wax, which may leak and dry up at high temperatures. Impregnation with a resin which is later polymerized in place has been found to be successful in producing good high temperature paper capacitors. The elimination of the paper and its substitution by plastic dielectric films appears to be logical step.

To illustrate the results which may be achieved, the data on plastic impregnated paper capacitors is presented. Tl ese are for 1 μ f units rated at 400 v. dc. The capacitors are in metal cans, the terminals project through silicone rubber bushings. The capacitors are manufactured by Tobe Deutschmann Corp. of Norwood, Mass.

Variation of capacitance with temperature:

Under 1.5% 20° C to 150° C.

Variation of power factor with temperature:

20° C — 0.35%
85° C — 0.32%
125° C — 0.65%
150° C — 2.5 %

Insulation Resistance:

20° C — 30 K meg.
85° C — 370 meg.
125° C — 30 meg.
150° C — 6 meg.

Life Test:

125° C — 660 v. dc stopped at 2000 hrs
150° C — 400 v. dc 300 to 400 hrs

Low valued paper capacitors are phenolic molded following plastic impregnation and cure. These units have characteristics comparable to those of the canned units. The solid structure of the capacitor permits phenolic molding with less difficulty than is experienced when oil or wax is the impregnant.

Cast housings for capacitors have been used. The mold is machined from metal and the capacitor positioned in it. The casting compound is poured in and cured. Pouring is accomplished at atmospheric pressure or under vacuum. It is applicable to expensive capacitors and those which cannot tolerate pressure molding. At present the casting process cannot compete economically with compression molding of housings around capacitors.

Transformers: There are several processes for the application of polymerizable plastic materials to transformers. The oldest and most widely used is a potting process wherein the impregnated transformer is placed in a mold and the casting resin formulation poured in and subsequently cured. The mold may be a metal can which remains as a part of the com-

pleted transformer. The resin merely takes the place of the hot melts and waxes which the transformer industry has used for years.

The use of 100% polymerizable impregnants for transformers has been an improvement over the use of solvent type varnishes. The completely solid structure of the transformer has decreased the possibility of corona, improved moisture sealing, heat dissipation and insulation resistance.

The heat dissipation of the solid transformer structures permits dissipation of up to 30% more heat than a varnish impregnated unit for the same temperature rise. Application of heavy plastic dip coats as a moisture seal is also being used for protection of transformers, as shown in Fig. 1.

Precision Resistors: An investigation has been made by the Rubicon Co. of Phila., Pa. as to the feasibility of embedment of precision resistors in casting resins for hermetic sealing purposes. The investigation is not yet complete.

The resistors used are of 10,000 ohms nominal value, wound on ceramic spools. The resistive element is cloth-covered manganin wire. The resin used was of the unfilled non-rigid polyester type and covered the resistive elements by approximately ⅛ in. The lead in wires were separated by approximately ¾ in.

Embedments were made in a machined Teflon mold. The embedment compound was in direct contact with the resistive element.

The insulation resistance of the spool with lead in wires attached but with the resistive element removed was 280 K megohms. This blank after embedment measured 110 K megohms. Following subjection to 100% relative humidity for 300 hours, the insulation resistance dropped to 40 K megohms, but recovered to the original value after standing under room conditions for several days.

The change in resistance due to embedment of the 10 K resistors was + 0.06% ± 0.01% or 6 ohms ± 1 ohm. After aging for 1300 hours at room temperature, the resistance change decreased to 2.8 ohms ± 1 ohm. The decrease continued and attempts are being made to accelerate the aging of the units. Present indications are that the resistors will recover to within 1 ohm or 0.01% of their original value.

The temperature coefficient of the embedded resistors is almost exactly that of the manganin wire from which they were wound. Temperature cycling from 100° C to —55° C

(*Continued on page* 173)

NOW!

TEST, SERVICE 12v. AUTO RADIOS

New Electro DC Power Supply Model C-12

0-16 Volts for 0-8 Amperes Continuous Output. Up to 12 Amperes Intermittently.

Ripple Only 3% at Full Load

Completely variable output makes it possible to test equipment under any voltage input condition. Provides filtered adjustable DC voltage for testing and servicing 12 volt and 6 volt auto radios from AC lines. Operates electronic equipment used on trucks, tanks and other mobile units and low voltage devices. Utilizes Superior Powerstat Voltage Control (Model 10) for extremely fine voltage adjustments.

Another Better-Than-Rated EPL Product!

Write for Complete Information

Electro ELECTRONIC EQUIPMENT

ELECTRO PRODUCTS LABORATORIES

4501-Tc North Ravenswood Ave., Chicago 40, Ill.

CANADA: ATLAS RADIO CORP., LTD., Toronto, Ont.

KULKA

Single and Double Pole "Toggle" Handle Type

AIRCRAFT SWITCHES

For Electronic and Communications Use

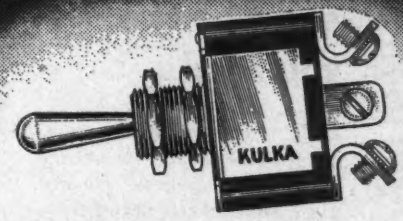

Made to JAN specs for DC, or AC circuits up to 1600 cycles. Available with screw terminals and with soldering lugs. Switching characteristics provide for changes in electric circuits by use of SPST, SPDT, DPST and DPDT. Has bakelite housing and only one mounting hole.

TERMINAL BLOCKS

Barrier type, made of molded bakelite in varied styles & sizes up to 26 terminals. Send for catalogue.

FULL SIZE

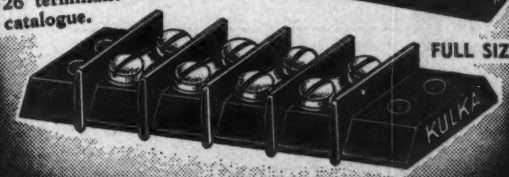

KULKA ELECTRIC MFG. CO., Inc.

MOUNT VERNON, N. Y.

SEE OUR EXHIBIT IRE SHOW BOOTH 2-139

Moto Mag

Registered Trademark of Keystone Products Co.

Keystone is one of the nation's foremost suppliers of magnetic amplifiers. Effective immediately we have available for prompt delivery the first of five "stock" magnetic amplifiers. Engineers may now design units around these "pre-designed" magnetic amplifiers. Inquiries are invited on the Moto Mag.

In place of the conventional output transformer and power amplifier tubes, the KP10-400 utilizes a phase sensitive vacuum tube demodulator and magnetic amplifier output stage which eliminates the need of rectifiers, thus assuring greater reliability. Each unit built in accordance with MIL specifications. KP10-400 operates from an input voltage of 115 volts, 400 cycles single phase. Output is 10 watts, reversible phase. KP10-400 operates from a minus 55° to plus 70° C with minimum variation. An input signal of 2 volts AC or DC working into a high impedance is required for a maximum of 110 volts, 10 watts, 400 cycles. The unit is 4 inches high, 3½ inches wide and 2½ inches deep. Weight—only 1 lb., 13 ounces.

Your inquiry will have our prompt attention.

KEYSTONE PRODUCTS CO.
904-6 TWENTY-THIRD ST., UNION CITY 6, N. J.
UNion 6-5400

'DIAMOND H' RELAYS



pack more performance into less space . . .

Rating for rating, "Diamond H" Series R hermetically sealed, miniature aircraft type 4PDT relays are smallest (1.6 cubic inches), lightest (3.76 ounces), have widest temperature range (−65° to +200°C.), greatest operating shock resistance (to 50 "G" and higher) and excel all others in their field in ability to break high currents and high voltages.

Ideal for high frequency switching, their inter-electrode capacitance is less than 5 micro-microfarads contacts to case, less than 2½ mmf between contacts, even with plug-in type relay and socket. Vibration range is from 0 to 500 cycles per second and upward at 15 "G" without chatter. Coil resistances up to 50,000 ohms are available, with contact loading through 10 A. resistive for 100,000 cycles (30 A. resistive for 100 cycles) at 30 V., D.C., or 115 V., A.C. Sensitivity approaches 100 milliwatts at 30 "G" operational shock resistance. They meet all requirements of USAF Spec. MIL-R-5757 . . . and far surpass many. Various standard mounting arrangements available. Write for Bulletin R-150 or ask for "Diamond H" technical assistance.

THE HART MANUFACTURING COMPANY
218 Bartholomew Avenue, Hartford, Connecticut

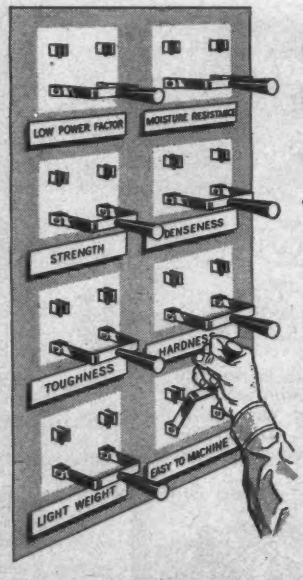

Choose the COMBINATION of properties you need

Light weight, strength, chemical and moisture resistance, hardness, toughness, density, high dielectric strength—Synthane laminated plastics combine them all in one easy-to-machine material. If your product—or a component—requires a specific *combination* of properties, it will pay you to investigate Synthane. The coupon below brings you full details.

SYNTHANE

Manufacturers of laminated plastics
SHEETS
RODS • TUBES
MOLDED-LAMINATED
MOLDED-MACERATED
FABRICATED PARTS

SYNTHANE CORPORATION
11 River Road, Oaks, Pa.

Gentlemen:
Please send me the new Synthane Catalog without charge or obligation on my part.

Name _____
Address _____
City _____ *Zone* ____ *State* _____

NEW 1953

ENGINEERING MANUAL

Send now for your copy of this new 36-page manual. It covers our complete line of Standardized Electronic Hardware.

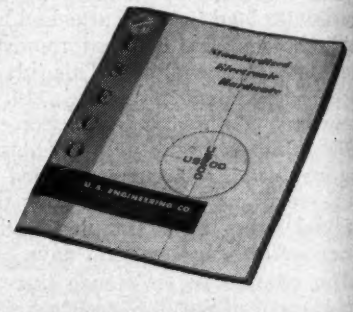

It gives detailed prints and specifications covering types, sizes, materials, finishes and complete engineering data on our terminal lugs, terminal boards, insulated lugs, chassis bushings, stand-offs, spacers and other electronic items in both standard and miniature sizes. Contains everything required for the design engineer. Especially helpful to the new user.

USECO hardware has been tried and proved in the field, and, through mass production, has been made available at competitive prices. Prompt deliveries. Today's mail answered *today!* Terminal boards fabricated to manufacturer's specifications. For your copy of New Engineering Manual, write

U. S. ENGINEERING CO.
520 Commercial St., Glendale 3, Calif.

NEW!

3 Super Standard Output Transformers

±1 db 20—30,000 cycles
High Efficiency
Small Size

S-510-F, 10 watts
Pri: 10,000ΩCT-8,000ΩCT
Sec: 16-8Ω

S-526-F, 20 watts
Pri: 6,600ΩCT-5,000ΩCT
Sec: 16-8-4Ω

S-542-F, 40 watts
Pri: 5,000ΩCT-4,000ΩCT
Sec: 16-8-4Ω

	Dimensions Inches	Wt. lbs.
S-510-F	2⅞—2¾—2½	2
S-526-F	4⅜—3 1/16—2¾	3
S-542-F	4 15/16—3 3/16—3 3/16	5½

Now in Stock

Write today for the new 1953 Peerless Catalog

PEERLESS
Electrical Products
A DIVISION OF ALTEC LANSING CORPORATION
9356 Santa Monica Blvd., Beverly Hills, Calif.
161 Sixth Avenue, New York 13, New York

has no detectable effect on the plastic coating.

Note the bleeder embedments in Fig. 2.

Other embedment methods in which the plastic material does not contact the resistive element are planned for future investigation.

High Frequency Inductors: The techniques outlined previously with respect to capacitors may be applied to high frequency inductors. The wound coil is dried and impregnated with a resin of good electrical properties. Cure of the resin produces a unit of solid structure which then may be enclosed in a housing which is cast, compression molded or dip coated. A polystyrene resin as the impregnant has been used on coils with excellent results.

Electric Motors: Casting resins are used to impregnate the armatures and fields of electric motors. They are generally superior to the varnishes previously used. Void free insulation, avoidance of solvent evaporation and better mechanical anchorage of the windings are given as the advantages.

On small motors and generators for servo applications both rotors and stators have been molded in resin for protection of the very fine wire used. The mold used is machined from Teflon. Teflon is used to eliminate the need for mold release which would upset the close tolerances to which the moldings must be made. The Teflon is carefully treated so that it will remain dimensionally stable. The windings are positioned in the mold and the formulated casting resin run in under vacuum. Curing and removal from the mold follow. The windings have thus applied to them a coating of 0.007 in. uniformly over the surface except at the air gap surface, at which point the coating is 0.005 in. The production rate is one rotor or stator (as the case may be) per mold each 45 minutes.

Teflon is an almost ideal mold material in that casting resins do not adhere to its surface, thus eliminating the need for mold release. Mold release is expensive to apply in a production casting process, and adversely affects the surface finish. Teflon coated metal molds have also proved to be practical for production casting of electrical equipment.

Antennas: Polyethylene has been used to cast around electronic components by a low pressure process. One of the most interesting applications is the embedment of helical antennas. See Fig. 3. It is reported that a one-third size reduction can be made in the size of the antenna

(*Continued on page* 175)

PHYSICISTS AND ENGINEERS

ATTENDING THE

I.R.E.

CONVENTION
NEW YORK CITY
MARCH 23-26...

Inquiries are invited regarding openings on our Staff

- RADAR LABORATORIES
- GUIDED MISSILE LABORATORIES
- ADVANCED ELECTRONIC LABORATORIES
- ELECTRON TUBE LABORATORIES
- FIELD ENGINEERING DEPARTMENT

For the convenience of those attending the I.R.E. meetings and Radio Engineering Show, members of the Laboratory Staff will be available for interviews at the Convention hotel. For appointment telephone Hughes New York office, LAckawanna 4-9350.

HUGHES

RESEARCH AND DEVELOPMENT LABORATORIES
Scientific and Engineering Staff
CULVER CITY, LOS ANGELES COUNTY, CALIFORNIA

Assurance is required that relocation of the applicant will not cause disruption of an urgent military project.

NEED INSTRUMENTS TO SOLVE
ELECTRONIC
PROBLEMS?...

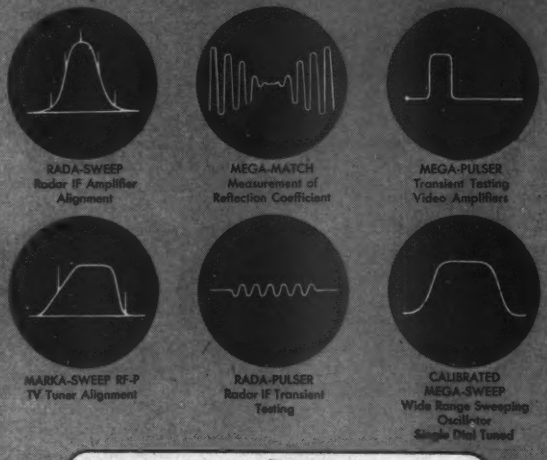

RADA-SWEEP
Radar IF Amplifier
Alignment

MEGA-MATCH
Measurement of
Reflection Coefficient

MEGA-PULSER
Transient Testing
Video Amplifiers

MARKA-SWEEP RF-P
TV Tuner Alignment

RADA-PULSER
Radar IF Transient
Testing

CALIBRATED
MEGA-SWEEP
Wide Range Sweeping
Oscillator
Single Dial Tuned

CONSULT
THIS LATEST
64-PAGE
CATALOG



Write FREE

KAY ELECTRIC CO.
14 MAPLE ST. PINE BROOK, N. J.

the switch is ON to
GUARDIAN
HERMETICALLY
Sealed
CONTROLS...

New! RELAYS
HERMETICALLY SEALED

SOLENOID
CONTACTORS

(200 Ampere)

For the first time sealed solenoid contactors may be completely assembled, tested, adjusted and inspected before sealing. They meet or exceed all MIL-R, AN, JAN and will pass proposed MIL-R tests. Can be constructed to operate in ambient temperature up to 120° C and withstand 50 G shock. Wired from top for accessibility. New Bulletin describes interchangeability, special insulation features. Write.

Series
595 D.C.
Relay

Guardian is equipped to *hermetically seal* a vast variety of relays to meet the most exacting military and industrial applications. If your application calls for expert *hermetic sealing*, we invite you to consult Guardian.

GUARDIAN G ELECTRIC
1607-C W. WALNUT STREET CHICAGO 12, ILLINOIS
A COMPLETE LINE OF RELAYS SERVING AMERICAN INDUSTRY

Special TO SPECIFICATIONS— IN ANY QUANTITY

COILS
TRANSFORMERS
PRECISION WIRE WOUND RESISTORS

We offer a complete *Engineering and Manufacturing Service* with emphasis on *Special Applications*. Small pilot runs, or full scale production executed economically and on schedule. Consult us for these products:—

COILS:	TRANSFORMERS:
High Freq. Air Core	Audio • Power
Multi-Layer Solenoids	Elevator
Pecking	High Voltage
Synchro Windings	Pulse Applications
Television RF, IF, etc.	Synchros, etc.

Experimental Samples promptly submitted, usually without charge. Write to:

COMPONENTS MFG. DIV., Dept. T3

TRANSVISION, INC.
NEW ROCHELLE, N. Y. NE 6-6000

TV LENSES

WORLD'S LARGEST STOCK

Coated Hi-resolution Lenses for every TV need — wide angle, normal, telephoto — 1¼ to 20" . . . . Cooke, Zeiss, Ektra, Carl Meyer, B & L, Wollensak, Ross, Astro, etc. All accessories, baffle rings, counter-balances, fittings. Foc. mounts fit RCA, Du Mont, GE Image Orth. Special mounts for GPI and others. Expert fitting service. *LOWEST PRICES.* 15 day FREE TRIAL. *Unconditional Guarantee.*

SERVING TV SINCE 1936 . . .

FREE! TV LENSE BULLETIN and PRICE LIST

BURKE & JAMES, Inc.
321 So. Wabash Avenue (T) Chicago 4

CARL MEYER
8" F:2.9

Announcing... Development of the

TYPE 103 MAGNETIC TRANSIENT RECORDER
Frequency Response — DC to 30 Kc

DEMONSTRATION at HOTEL BELMONT PLAZA
Lexington Avenue and 49 Street, New York
During the IRE CONVENTION, March 23-26.

ASK room clerk for Room Number.

MAGNE-PULSE CORPORATION
140 Nassau Street New York 38, New York

???NEED TUBES FOR SPECIAL APPLICATIONS?

Victoreen is prepared to assist you by engineering and manufacturing tubes for your particular application.

Expanded production facilities plus a competent tube engineering staff permit us to accept orders for new tube types now.

ABOUT VICTOREEN

Oldest Manufacturer of radiation measuring instruments. Over ten years experience in development and engineering of electronic tubes, specializing in subminiature types.

SEND SPECIFICATIONS TODAY

Use this check list (✓) as a guide in submitting your inquiry. This will assist our tube engineers in studying your application.

APPLICATION:
Amplifier
Control
Counter
Doubler
Electrometer
Modulator
Oscillator
Rectifier
Current Regulator
Voltage Regulator
Voltage Reference
Other

CLASSIFICATION:
Diode
Triode
Tetrode
Pentode
Special Purpose
Other

ENVELOPE:
Glass
Ceramic
Metal
T-3
T-5½
Other

ALTITUDE REQUIREMENTS:

MECHANICAL REQUIREMENTS:
Shock
Vibration

AMBIENT TEMPERATURE:

CONDITIONS OF USAGE:
Filament Voltage
Filament Current
Grid Voltage
Grid Current
Screen Current
Suppressor Voltage
Suppressor Current
Maximum Frequency
Plate Voltage
Plate Current
Screen Voltage
Amplification Factor
Plate Dissipation
Power Output

SPECIFICATIONS:
Commercial
Mil (JAN)
Army
Navy
Air Force
A. E. C.

QUANTITIES REQUIRED:
Initially_____ Annually_____ Monthly_____
ANY OTHER REQUIREMENTS:_____

BETTER COMPONENTS MAKE BETTER INSTRUMENTS

Visit our Booths 4-103 and 4-104 at IRE show NYC

Victoreen Instrument

3800 PERKINS AVE. CLEVELAND 14, OHIO

system. Because of the excellent electrical characteristics of polyethylene there is no impairment in operation.

Polystyrene may also be used but its poor low temperature characteristics have limited its use. Polystyrene casting resin, however, is being used successfully in embedment of the connection between the coaxial cable and antenna elements of the weather-proof antennas made by the Workshop Associates of Needham, Mass.

A method which may be used to make polystyrene castings of extremely large size is to first fill the mold with polystyrene molding granules and under vacuum flow in a properly catalyzed polystyrene casting resin. Upon curing, a perfect bond is formed between the casting resin and the granules. The casting is almost completely strain-free.

Radomes are produced by using casting resin formulations in conjunction with web fillers, such as cloth and glass mat. The cloth or mat is saturated with the catalyzed liquid resin and then introduced between the platens of a press which are shaped to the desired contour of the radome. Low pressures, below 50 psi, and low temperatures 200 to 250° F are used to cure the laminate.

Mechanical Applications: Casting resins have found innumerable uses in electrical equipment wherein the function of the plastic material is primarily mechanical.

A few of these are:

Experimental castings of items which will be injection or compression molded when the final design is frozen.

Production of large plastic pieces which would be impractical to mold. One method which has been used is to injection mold a shell for the casting which serves as the mold. A casting resin which will bond to the shell is poured in and cured.

Casting resin formulations are used as cements and sealants. For example, a pair of thermistors are sealed into an aluminum housing for measurement of underwater temperatures. The seal is of unique design and has been tested against 300 psi water pressure. See Fig. 4.

Electronic Assemblies: Two approaches have been made to the embedment of electronic assemblies and equipment. One has been to embed in one large casting the complete system. This has proved to be successful in only a few instances. The basic difficulty is with component reliability. Until electronic

(*Continued on page* 176)

LITTELFUSE **MINIATURE** FUSE EXTRACTOR POST FOR 3AG FUSES LITTELFUSE, INC., 1865 MINER STREET, DES PLAINES, ILLINOIS BURTON BROWNE ADVERTISING

components can be counted on for long trouble-free life, embedment of large complex assemblies will be impractical for the majority of electronic equipment. With respect to expendable military equipment, complete embedment is practical and should improve overall reliability. Expendable applications include guided missiles, sonobuoys, proximity fuses and controlled torpedoes. Photos of an amplifier assembly before and after embedment are shown in Figs. 5 and 6.

Unitized construction is the other approach. No more than approximately 30 components are contained in a single casting, it is practical for most equipment for the armed services and for many commercial applications.

Polymerizable materials are already seeing large scale use in the electronic industry as impregnants, coatings and potting compounds. At present these uses are mainly with respect to components. Commercial casting of electronic assemblies is limited by lack of knowledge regarding component reliability.

Strain-Gage

(*Continued from page 75*)

provides a power output of 2.0 watts minimum and is tunable over the frequency range 215 to 230 MC. It employs four subminiature triodes and is readily removable as a unit from the main chassis.

The AN/AKT-8 equipment requires 6.3 v. at approximately 5.5 amps and 135 v. at approximately 150 ma.

The six subcarrier oscillators, the voltage regulator unit and the r-f transmitter are contained in a watertight jacket with AN connectors provided on the front panel for strain gage, antenna, and power connections. If desired, all units may be mounted separately and are capable of operation without shock mounts. The complete AN/AKT-8, with its waterproof jacket, however, is provided with vibration isolation mounts. The assembled AN/AKT-8 is shown in Fig. 9.

Fig. 9: Complete AN/AKT-8 telemetering unit

24 HOUR
DELIVERY
FROM STOCK!
RELAYS
Our stock of more than a million relays — in over a thousand different types — is the world's largest. Don't delay your production for want of large or small quantities of relays of any type.
Telephone, wire or write for quotations.
ALLIED CONTROL CO. INC. N.Y.C. U.S.A.
TYPE
CONTACTS
VOLTS 24
AMPS 10
CIRCLE RELAY DIV.

NEW AND MORE COMPREHENSIVE
1953 RELAY SALES CATALOG
NOW READY
Be sure to send for your copy

Relay Sales
Telephone
SEeley 8-4146
833 W. CHICAGO AVE.
DEPT. 6, CHICAGO 22, ILL.

THIS IS IT . . . Measures or Generates ANY Frequency From 20—640 M.C.* Within 10 Parts Per Million

Direct Reading VHF Frequency Meter Model FM-3

*Under certain conditions can be used below 20 mc and above 640 mc.

Accuracy: ..... ± 0.001%
Stability: ..... ± 0.001%
Resetability: ... ± 0.0005%

GERTSCH PRODUCTS
INC.
11846 Mississippi Avenue
P.O. Box 13856
Los Angeles 25, California
In Canada, Atlas Radio Corp., Ltd., Toronto

WORLD'S FINEST IN-STOCK
INDUSTRIAL ELECTRONICS PARTS CATALOG

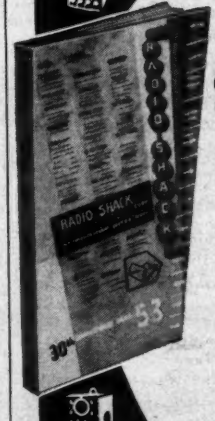

NEW 200-PAGE 1953 EDITION JUST PUBLISHED!
SENT FREE

Write on your company letterhead. Radio Shack's catalog is COMPLETE from AMPEX to ZEPHYR. Over 15,000 listings of components and equipment, plus details, pictures, lowest net prices. Separate indexing of products and manufacturers. Full JAN data! The preferred buying and reference guide for P.A.'s, engineers, designers, schools, civil defense, government, service agencies. *For your FREE copy, write TODAY to Department 7*

RADIO SHACK
CORPORATION
167 Washington St., Boston 8, Mass.

TELE-TECH

Advertisers — March, 1953

AEROVOX CORP. 45
Agency—Austin C. Lescarboura & Staff
AIRCRAFT TRANSFORMER CORP. 35
Agency—Picard Advertising Co.
ALDEN PRODUCTS CO. 169
Agency—Richard Thorndike Agency
ALTEC LANSING CORP. 173
Agency—Abbott Kimball Co. of Calif.
AMERICAN ELECTRICAL HEATER CO. 6
Agency—Allman Company Inc.
AMERICAN ENCAUSTIC TILING CO. 155
Agency—John Falkner Arndt & Co., Inc.
AMERICAN MICROPHONE CO. 49
Agency—Clifford Woolsey
AMERICAN PHENOLIC CORP. 28, 29
Agency—Burton Browne Advertising
AMERICAN WOOD WORKING CO. 170
AMPERITE CO., INC. 133
Agency—H. J. Gold Co.
ANCHOR INDUSTRIAL CO. 159
Agency—Conti Advertising Agency Inc.
ANDREW CORP. 144
Agency—Burton Browne Advertising
ANTARA CHEMICALS DIVISION OF GENERAL DYESTUFF CORP. 8, 9
Agency—R. T. O'Connell Co.
ARCO ELECTRONICS INC. 168
Agency—Sternfield-Godley, Inc.
ARNOLD ENGINEERING CO. 44
Agency—Walker & Downing, General Agency
ARTOS ENGINEERING CO. 142
Agency—Cramer-Krasselt Co.
ASTRON CORP. 19
Agency—Salow & Associates, Advertising
AUDIO DEVICES, INC. 111
Agency—Rickard & Co., Inc.
AVERY ADHESIVE LABEL CORP. 169
Agency—Martin R. Klitten Co., Inc.

BARRY CORPORATION 123
Agency—Engineered Advertising
BELL TELEPHONE LABS. 12
Agency—N. W. Ayer & Son, Inc.
BENDIX AVIATION CORP., ECLIPSE DIV. 137
Agency—McManus, John & Adams, Inc.
BERKELEY SCIENTIFIC 135, 146
Agency—George C. McNutt, Advertising
BIRTCHER CORP. 139
Agency—Crossley & Jefferies, Inc.
BLAW-KNOX CO. 127
Agency—Al Paul Lefton Co., Inc.
BLONDER-TONGUE LABS, INC. 178
Agency—Shappe-Wilkes Inc.
BURKE & JAMES, INC. 174
Agency—Julian Frank & Assoc.
BURNELL & COMPANY 2
Agency—Mitchell Advertising Agency
BUSSMANN MANUFACTURING CO. 15

CALDWELL-CLEMENTS, INC. 122, 124, 150, 152, 153, 156
CANNON ELECTRIC CO. 145
Agency—Hixson & Jorgensen, Inc.
CENTRALAB DIV. GLOBE-UNION INC. 113
Agency—Klau-Van Pietersom-Dunlap, Inc.
CENTURY LIGHTING, INC. 150
Agency—William H. Weintraub Co.
CINCH MANUFACTURING CO. 107
Agency—D. T. Campbell Inc.
CINEMA ENGINEERING CO. 14
Agency—R. L. Power
CLEVELAND CONTAINER CO. 21
Agency—Nesbitt Service Co.
CONTINENTAL-DIAMOND FIBRE CO. 13
Agency—Geare-Marston
CORNELL-DUBILIER ELECTRIC CORP. 132
Agency—Friend, Reiss, McGlone
CROSBY LABORATORIES, INC. 141
Agency—Sam Nisensen
CUNNINGHAM, SON & CO., INC., JAMES .. 155

DAVEN COMPANY ..... Cover 3
Agency—Art-Copy Advertising Agency
DIALIGHT CORP. 62
Agency—H. J. Gold Co.
DUMONT LABS., INC., ALLEN B. 7, 26
Agency—Austin C. Lescarboura & Staff
DX RADIO PRODUCTS CO. 163
Agency—Turner Advertising Agency

ESLER ENGINEERING CO., INC. 166
Agency—Walter J. Zimmerman Assoc.
EITEL-McCULLOUGH, INC. 131
Agency—Conner, Jackson, Walker, McClure
ELECTRICAL TOWER SERVICE, INC. 165
Agency—Jackson, Haerr, Peterson & Hall, Inc.
ELECTRO MOTIVE MFG. CO., INC. 55
Agency—Cory Snow, Inc.
ELECTRO PRODUCTS LABS. 171
Agency—Robertson, Buckley & Gotsch, Inc.

FORD INSTRUMENT CO., DIV. SPERRY CORP. 17
Agency—G. M. Basford Co.
FORMICA CO. 124
Agency—Perry-Brown, Inc.
FREED TRANSFORMER CO., INC. 158
Agency—Franklin Advertising Agency

GATES RADIO CO. 34
Agency—Bartz Advertising Agency
GENERAL ELECTRIC CO. 36, 37, 54, 63, 170
Agency—Maxon Inc.
GENERAL ELECTRIC CO., LAMP DIV. 163
Agency—Batten, Barton, Durstine & Osborn Inc.
GENERAL PRECISION LAB., INC. 51
Agency—Burke Dowling Adams, Inc.
GENERAL RADIO CO. 121
Agency—K. E. Morang Co.
GERTSCH PRODUCTS INC. 176
Agency—R. L. Power
GRANT PULLEY & HARDWARE CO. 161
Agency—Milton Herder, Advertising
GRAY RESEARCH & DEV. CO., INC. 48
Agency—French & Preston, Inc.
GRAYHILL 159
Agency—Merchandising Advertisers, Inc.
GUARDIAN ELECTRIC MFG. CO. 174
Agency—Kennedy & Co.
GUDEBROD BROS. SILK CO., INC. 167
Agency—Lee Ramsdell & Co., Inc.

HAMMARLUND MFG. CO., INC. 58
Agency—Roeding & Arnold, Inc.
HART MANUFACTURING CO. 172
Agency—Wilson, Haight & Welch, Inc.
HEATH CO. 158
Agency—Advance Advertising Service
HEMINWAY & BARTLETT MFG. CO. 164
Agency—R. T. O'Connell Co.
HEPPNER MANUFACTURING CO. 134
Agency—Burton Browne Advertising
HERMETIC SEAL PRODUCTS CO. 11
Agency—Art-Copy Advertising Agency
HI-Q DIV., AEROVOX CORP. 114
Agency—Austin C. Lescarboura & Staff
HOUSTON-FEARLESS CORP. 27
Agency—Taggart & Young Advertising
HUGHES RESEARCH & DEVELOPMENT LABS. 173, 178
Agency—Foote, Cone & Belding
HUGHEY & PHILLIPS 157
Agency—Welsh-Hollander Advertising
HYTRON RADIO & ELECTRONICS CO. 61
Agency—Bennett, Walther & Menadier, Inc.

INTERNATIONAL RECTIFIER CORP. 47
Agency—Roy F. Irvin
INTERNATIONAL RESISTANCE CO. 22, 23
Agency—John Falkner Arndt & Co., Inc.

JENNINGS RADIO MFG. CO. 20
Agency—L. H. Waldron Advertising
JOHNSON CO., E. F. 140
Agency—Mitchell & Mitchell, Inc.
JONES DIV., HOWARD B., CINCH MFG. CORP. 161
Agency—Symonds, MacKenzie & Co., Inc.

KAHLE ENGINEERING CO. 168
Agency—Conti Advertising Agency
KALBFELL LABORATORIES, INC. 166
Agency—Tolle Co.
KAY ELECTRIC CO. 174
Agency—Felt Advertising, Inc.
KENYON TRANSFORMER CO., INC. 138
Agency—Pickard Advertising Co.
KESTER SOLDER CO. 53
Agency—Paul J. Steffen Co.
KETAY MANUFACTURING CORP. 10
Agency—Hicks & Greist, Inc.
KEYSTONE PRODUCTS CO. 172
Agency—W. H. Watt Advertising Agency
KINETIX INSTRUMENT CO., INC. 167
KLEIN & SONS, MATHIAS 143
Agency—Buchen Co.
KNIGHTS CO., JAMES 50
Agency—Kenneth B. Butler & Assoc.
KULKA ELECTRIC MFG. CO. 171
Agency—Leon Blehart Co.

LEGRI S CO. 166
LITTELFUSE, INC. 175
Agency—Burton Browne Advertising

MACHLETT LABS. INC. 116
Agency—E. Scott Brown Advertising
MAGNECORD, INC. 151
Agency—Arthur Towell Inc.
MAGNE-PULSE CORP. 174
MALLORY & CO., INC., P. R. 42
Agency—Aitkin-Kynett Co.
MELPAR, INC. 160
Agency—Equity Advertising Agency
METHODE MANUFACTURING CORP. 149
Agency—Sander Rodkin Advertising Agency
MIDLAND MFG. CO., INC. 154
Agency—R. J. Potts—Calkins & Holden, Inc.
N. R. K. MFG. & ENGINEERING CO. 160
Agency—Kreicker & Meloan, Inc.
NATIONAL VULCANIZED FIBRE CO. 119
Agency—John Gilbert Craig Advertising, Inc.

PAR-METAL PRODUCTS CORP. 162
Agency—H. J. Gold Co.
PERMOFLUX CORP. 165
Agency—Bayard H. Clark Co.
POLARAD ELECTRONICS CORP. 24, 25
Agency—Powerad Co.
POTTER INSTRUMENT CO., INC. 117
Agency—J. B. Roberts, Inc.
PRECISION PAPER TUBE CO. 161
Agency—Symonds, MacKenzie & Co., Inc.
PYRAMID ELECTRIC CO. 39
Agency—Sylvan A. Wolin & Assoc.

RADIO CORP. OF AMERICA ..... Cover 4, 30, 31, 43, 125
Agency—J. Walter Thompson Co.
RADIO CORP. OF AMERICA, SPECIALIZED EMPLOYMENT DIV. 18
Agency—Al Paul Lefton Co., Inc.
RADIO MATERIALS CORP. ..... Cover 2
Agency—Turner Advertising Agency
RADIO RECEPTOR CO., INC. 159
Agency—Walter J. Zimmerman Associates
RADIO SHACK CORP. 176
Agency—Engineered Advertising
RAYPAR INC. 118
Agency—Buti-Roberts & Assoc.
RAYTHEON MFG. CO. 59
Agency—Walter B. Snow & Staff, Inc.
RELAY SALES 176
Agency—A. F. Marthens & Assoc. Inc.
RESISCO CORP. 164
Agency—J. Gerald Brown Advertising
RESISTANCE PRODUCTS CO. 56
Agency—Olian-Sidman Advertising Agency, Inc.
RIVERBANK LABORATORIES 156
Agency—Robert E. Clark Advertising Agency

SANGAMO ELECTRIC CO. 147
Agency—Arthur R. Mogge, Inc.
SHALLCROSS MFG. CO. 16
Agency—Harry P. Bridge Co.
SHURE BROTHERS, INC. 60
Agency—Henry M. Hempstead & Co.
SPEER RESISTOR DIV., SPEER CARBON CO. 32
Agency—Hazard Advertising Co.
SPRAGUE ELECTRIC CO. 64
Agency—Harry P. Bridge Co.
STANDARD TRANSFORMER CORP. 148
Agency—Burnet-Kuhn Advertising Co.
STUPAKOFF CERAMIC & MFG. CO. 57
Agency—Walker & Downing Advertising
SYLVANIA ELECTRIC PRODS. INC. 33, 46
Agency—Cecil & Presbrey, Inc.
SYNTHANE CORP. 172
Agency—John Falkner Arndt & Co., Inc.

TRANSVISION INC. 174
Agency—H. J. Gold Co.
TRU-OHM PRODUCTS DIV., MODEL ENGRG. & MFG. CO. 109
Agency—Sander Rodkin Advertising Agency
TUNG-SOL ELECTRIC INC. 41
Agency—E. M. Freystadt Assoc., Inc.
TURNER COMPANY 136
Agency—W. D. Lyon Co., Inc.

UNITED CATALOG PUBLISHERS, INC. 154
Agency—Burton Browne Advertising
U. S. ENGINEERING CO. 172
Agency—O. K. Fagan Advertising Agency

VICTOREEN INSTRUMENT CO. 175
Agency—Carpenter Advertising Co.

WATERMAN PRODUCTS CO., INC. 4, 5
Agency—Abner J. Gelula & Assoc.
WECKESSER CO. 170
WELCH MFG. CO., W. M. 162
Agency—H. A. Hooker Advertising Agency, Inc.
WESTERN ELECTRIC CO. 12
Agency—N. W. Ayer & Son, Inc.
WESTINGHOUSE ELECTRIC CORP. 40, 52
Agency—Fuller & Smith & Ross, Inc.
WHEELER INSULATED WIRE CO., INC. 110
Agency—Edward W. Robotham & Co.
WILKOR DIV., AEROVOX CORP. 115
Agency—Austin C. Lescarboura & Staff
WOLLENSAK OPTICAL CO. 38
Agency—Ed Wolff & Assoc.

While every precaution is taken to insure accuracy, we cannot guarantee against the possibility of an occasional change or omission in the preparation of this index.

WANTED SALES MANAGER

Leading manufacturer of ceramic capacitors needs an aggressive top-flight sales manager. Our product is used by all of the larger electronic equipment manufacturers and is well established. This man must have excellent contacts in this field and must be able to obtain full cooperation from our sales representatives. This position will pay upwards of $25,000 per year, but the man we want will be accustomed to a high income. If you think you can meet our requirements we would like to hear from you giving full details. Your reply will be confidential. Box A3-53, Tele-Tech.

ELECTRON TUBE TECHNICIANS

We now have several openings for technicians to work in the fabrication and processing of advanced type electron tube research models.

To qualify for one of these openings you should be experienced in experimental work for research and development in vacuum tubes, which includes the fields of mechanics, electronics, chemistry and high-vacuum techniques.

ADDRESS RESUME OF TRAINING AND EXPERIENCE TO

HUGHES

RESEARCH AND DEVELOPMENT LABORATORIES

Technical Personnel Department

CULVER CITY, LOS ANGELES COUNTY, CALIFORNIA

BULLETINS

Analog Computer

Electronic Associates, Inc., Long Branch & Naberal Avenues, Long Branch, N. J., will forward a copy of their new 17-page bulletin entitled "A Precision Analog Computer" to interested engineers upon written request. Discussions of computer components, elements, and input-output system are included.

Speaker Enclosure

The paper on the R-J speaker enclosure, presented before the Radio Club of America, is now available in printed form and may be purchased by directing inquires to 11 West 42nd St., New York, N. Y. Cost is fifty cents a copy.

TV Transmitters

Specifications and installation information for the series 9000 (low band) and series 12,000 (high band) television transmitters are described in separate bulletins published by Allen B. DuMont Laboratories, Inc., 1500 Main Ave., Clifton, N. J.

Communication Tape Monitor

A fully illustrated eight-page brochure describing an automatic tape monitor system for recording radio and phone communications is available from Magnecord, Inc., 225 W. Ohio St., Chicago 10, Ill. This recorder-reproducer, originally developed for the CAA, permits four simultaneous signal recordings on standard ¼ in. tape.

Microwave and Telephone

The economic aspects of multi-channel operation of telephone and telegraph circuits over microwave radio links are analyzed in bulletin 72A-P16, published by the Lenkurt Electric Co., San Carlos, Calif.

Integrator

The Instron Integrator is the subject of a new bulletin just released by the Instron Engineering Corp., 2 Hancock St., Quincy 71, Mass. Applications, general description, principle of operation, input requirements, and technical specifications are presented.

Bobbin Winder

George Stevens Manufacturing Co., Inc., Pulaski Road at Peterson, Chicago 30, Ill., has released a new catalog sheet illustrating and describing model 119-A bobbin winder (economy box—cam operated) and model T-102 dereeling tension for extremely fine wire.

Power Tetrode

A new technical data sheet on Los Gatos Brand 4D21 power tetrode has been released by Lewis & Kaufman, Ltd., 52 El Rancho Ave., Los Gatos, Calif.

FCC Modifies Operating Rules

The FCC has relaxed its Operator Requirement Rules for many AM and FM stations, permitting remote control of such stations. This has been hailed as major victory for the NARTB, whose petition of Feb. 1, 1952, initiated the Commission's Rule. The amendments to the FCC Rules will permit: (1) Persons holding restricted radiotelephone operator permits or higher class of licenses to stand the required regular transmitter watches at AM and FM stations employing non-directional antennas and operating with powers of 10 kw or less, and (2) Remote Control of such stations. The FCC states, also that operation under the CONELRAD plan for defense measures in case of air raid alerts (see p. 85 of this issue) is possible by operators holding other than first-class radiotelephone authorizations.

ELECTRONIC ENGINEER WANTED!

An established business organization engaged in development and manufacture of products for VHF and UHF Television Application, requires an individual qualified to work independently, to organize, and to supervise development projects.

This position is to be permanent and will offer the opportunity for unlimited advancement to a successful career. Offers stimulating and congenial surroundings in a newly acquired plant.

Attractive Salary

Write stating qualifications

Blonder-Tongue

LABORATORIES

526-536 North Avenue

Westfield, New Jersey

ENGINEERS ELECTRONICS *TOP JOBS*

We are a large established Company. Company which is spearheading a dynamic expansion program in the Electronic Tube field. Top quality men are needed to augment our present staff.

Development—Creative mechanical engineering talent required to visualize tomorrow's products today, in product development, procedure, equipment. Should possess manufacturing, research or engineering background in this field. This opening presents a challenge to a qualified man whose abilities and knowledge presently are restricted.

Application—An inventive, ingenious engineer with a background in electronic circuits. One whose abilities (EE preferred) can meet the constant challenges of tube application. Personality and persuasiveness are desirable attributes.

Tube Production—A-1 man required for tailormade position for experienced receiving tube plant manufacturing executive. Our expansion program is sole reason for considering applicant from another company.

All replies are strictly confidential. Our management is aware of these openings. Please submit resume.

Box 353.
Tele-Tech,
480 Lexington Ave.
New York 17, N. Y.

New Switch on SWITCHES by DAVEN

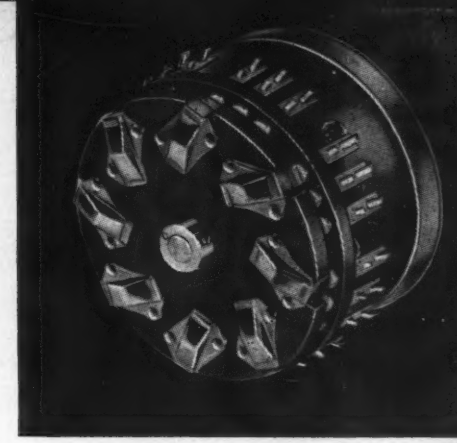

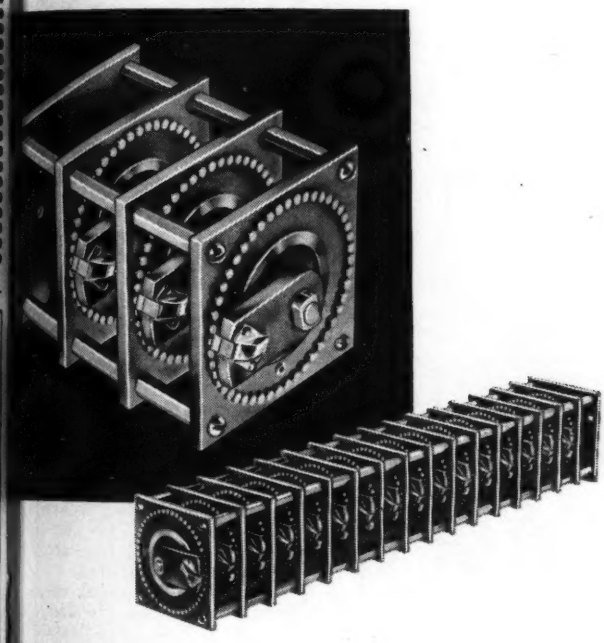

DAVEN not only supplies switches from its hundreds of standard units, but can also effect *quick changes* from standard units to special switches by using components at hand.

As a result, you are able to select, from thousands of variations, the right switch for your particular requirements.

And . . . here's a *new switch* for problems that defy solution with standard components. If your prototype is that of an unusual piece of equipment and requires a switch not yet developed, DAVEN will engineer it for you.

This is a service which DAVEN is singularly well qualified to perform by reason of its skilled engineering staff and exceptional facilities. For more than a generation, DAVEN has built up a Development Department that is second to none in solving difficult switch problems.

Furthermore, because only DAVEN has the patented "knee-action" rotor, units can be produced with a greater number of switch positions and poles in a smaller space than was ever possible before.

Why not call on DAVEN today to assist with your development project, especially if you need switches that must render maximum performance in minimum space.

THE DAVEN CO.
179 CENTRAL AVENUE
NEWARK 4, NEW JERSEY

It's FREE **Write for your copy of DAVEN's new, 28-page brochure on SWITCHES.**

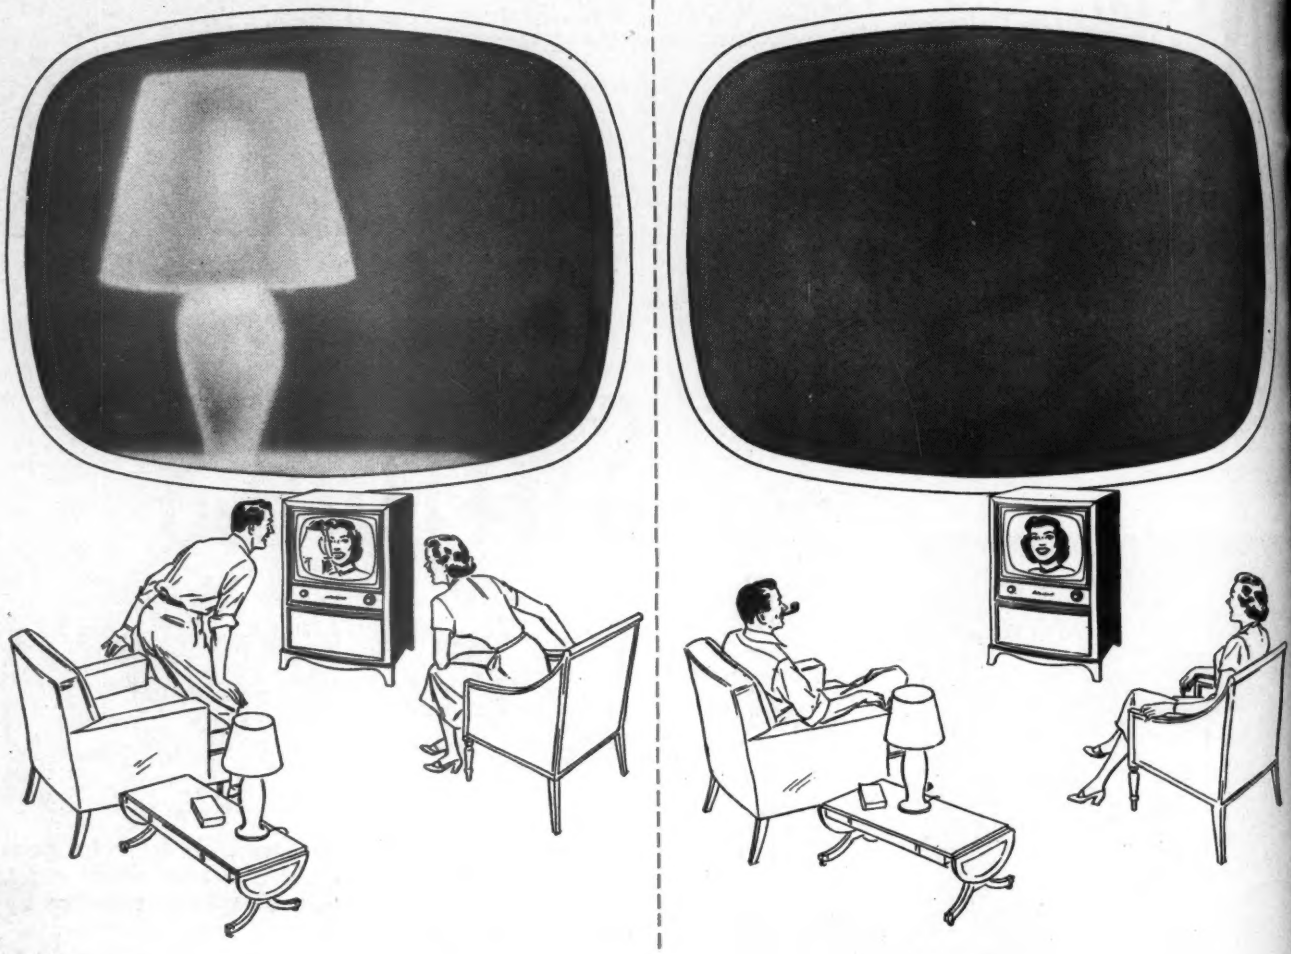

Why is one *Reflection-Free?*

THE picture tube faceplate on the right is free from annoying room reflections because its outer surface is lightly frosted. In this way, RCA metal-shell picture tubes give you an important sales feature—reflection-free faceplates.

Remember: RCA metal-shell picture tubes with their frosted faceplates not only suppress bothersome room reflections but preserve sharp, graphic picture quality over their entire faceplate area.

Why not make RCA frosted faceplate picture tubes an important feature of your 1953 TV set design. Take advantage of the extra consumer appeal . . . give your merchandising program new sales power.

For technical data or design help, write RCA, Commercial Engineering, Section 57CR. Or simply call your nearest RCA Field Office:

(EAST) Humboldt 5-3900, 415 S. 5th St., Harrison, N. J.

(MIDWEST) Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill.

(WEST) Madison 9-3671, 420 S. San Pedro St., Los Angeles, Cal.

RCA Metal-Shell Kinescopes

RCA-21AP4 (magnetic-focus type)	RCA-21MP4 (electrostatic-focus type)

All RCA metal-shell kinescopes feature faceplates which suppress annoying room reflections.

RCA

RADIO CORPORATION of AMERICA

ELECTRON TUBES — **HARRISON, N.J.**